



| REV | DESCRIPTION                                | DATE       | BY |
|-----|--------------------------------------------|------------|----|
| P1  | Making sketch for the prototype build plan | 2026-09-30 | AC |



TOP VIEW

Scale 1:5; looking down (along -Z)




FRONT VIEW

Scale 1:5; looking at the front (along +Y)



RIGHT VIEW

Scale 1:5; looking at the right side (along -X)

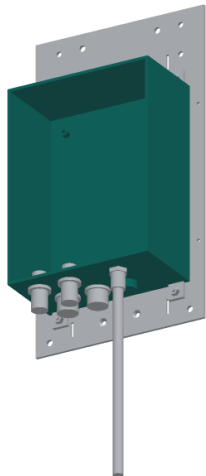

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Drawn upside down: stand the box on its top, back face toward you; the top view then shows the bottom face as you see it on the bench. Measure from the back face, and sideways from the centre line (left and right as seen from the front). The drilling layout picture repeats this. Back row, 27 mm from the back face: gland 1 at 40 left, gland 2 at 8 left (16.2 mm holes), vent at 24 right (12.2 mm). Front row, 55 mm from the back face: port A at 54 left, port B at 22 left (16.2 mm), antenna at 30 right (6.5 mm). Every outside flange is at least 8 mm from the next one. Tape the face, pilot drill 3 mm slowly with wood behind, open out with a step drill, light pressure. No solvents: polycarbonate crazes. Deburr inside and out. Check each hole size on the part's datasheet before the last step of the drill. Fit the lugs (the maker's kit) to the four back corners as the maker says.

FIELDNODE

[github.com/BoujeeEnjinia1701/fieldnode](https://github.com/BoujeeEnjinia1701/fieldnode)

FieldNode enclosure body: drilling sketch

|                                                                                                             |                    |                                                                                                     |                           |                        |                                             |
|-------------------------------------------------------------------------------------------------------------|--------------------|-----------------------------------------------------------------------------------------------------|---------------------------|------------------------|---------------------------------------------|
| DRAWING NO.<br><b>FND-DWG-108</b>                                                                           |                    |                                                                                                     | REV<br><b>P1</b>          | SHEET<br><b>1 of 1</b> | SIZE<br><b>ANSI B</b>                       |
| SCALE<br><b>1:5</b>                                                                                         | UNITS<br><b>mm</b> | PROJECTION<br> | DATE<br><b>2026-09-30</b> |                        | DRAWN<br><b>Amish Chadha</b>                |
| MATERIAL / NOTES<br><b>Bought IP65 polycarbonate box 150 x 90 x 200 mm</b>                                  |                    |                                                                                                     |                           |                        |                                             |
| Licensed CERN-OHL-S-2.0 · Design Molecule Lab · <a href="https://designmolecule.com">designmolecule.com</a> |                    |                                                                                                     |                           |                        | Generated from cad/src; do not edit by hand |