



REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-09-30	AC



TOP VIEW

Scale 1:2; looking down (along -Z)

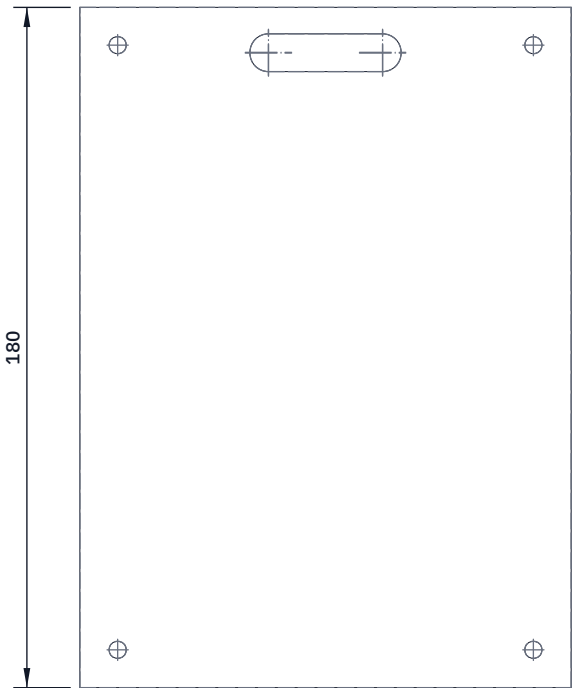


FRONT VIEW

Scale 1:2; looking at the front (along +Y)



RIGHT VIEW

Scale 1:2; looking at the right side (along -X)

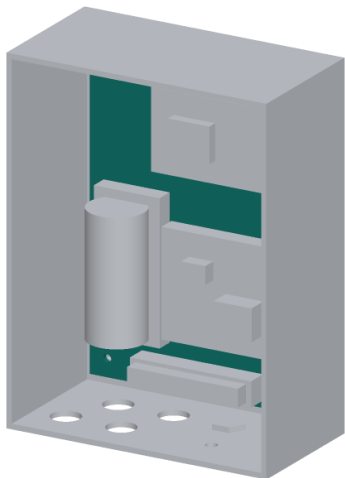

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Print flat, 130 x 180 x 3 mm, in ASA in an enclosed printer.

Four 4.5 mm holes 10 mm in from each side and from top and bottom (110 x 160 mm apart), to match the enclosure's four moulded bosses.

Measure your enclosure's bosses first and move the holes to suit.

Finger slot 40 x 10 mm, 7 mm below the top edge, for lifting out.

Lay out on the front: cell holder lower left, power modules lower right, controller above, connector strip along the bottom edge.

Mark each module's holes through the module; drill 3.2 mm for M3 screws on 6 mm nylon standoffs.

Fit: four M4 screws into the bosses; the plate sits 6 mm off the back wall and 7 mm above the floor, clear of the gland nuts.

Check: flat within 0.5 mm; drops in and lifts out without force.

FIELDNODE

github.com/BoujeeEnjinia1701/fieldnode

FieldNode internal plate: making sketch

DRAWING NO. FND-DWG-107			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:2	UNITS mm	PROJECTION 	DATE 2026-09-30		DRAWN Amish Chadha
MATERIAL / NOTES ASA, 3D printed, 100 % infill					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com				Generated from cad/src; do not edit by hand	