



REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-09-30	AC



TOP VIEW

Scale 1:5; looking down (along -Z)




FRONT VIEW

Scale 1:5; looking at the front (along +Y)



RIGHT VIEW

Scale 1:5; looking at the right side (along -X)

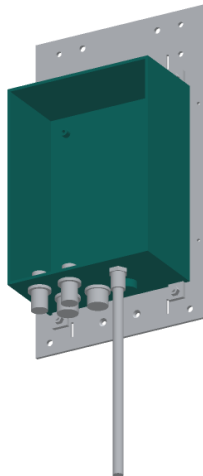

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Drawn upside down: the top view shows the bottom face, back face at the top.
Measure forward from the back face and sideways from the centre line, seen from the front (right is positive).
Back row, 27 mm from the back face: gland 1 at 40 left, gland 2 at 8 left (16.2 mm holes), vent at 24 right (12.2 mm).
Front row, 55 mm from the back face: port A at 54 left, port B at 22 left (16.2 mm), antenna at 30 right (6.5 mm).
Every outside flange is at least 8 mm from the next one.
Tape the face, pilot drill 3 mm slowly with wood behind, open out with a step drill, light pressure. No solvents: polycarbonate crazes.
Deburr inside and out. Check each hole size on the part's datasheet before the last step of the drill.
Fit the lugs (the maker's kit) to the four back corners as the maker says.

FIELDNODE

github.com/BoujeeEnjinia1701/fieldnode

FieldNode enclosure body: drilling sketch

DRAWING NO. FND-DWG-108			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:5	UNITS mm	PROJECTION 	DATE 2026-09-30		DRAWN Amish Chadha
MATERIAL / NOTES Bought IP65 polycarbonate box 150 x 90 x 200 mm					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com					Generated from cad/src; do not edit by hand