


REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-01	AC



TOP VIEW

Scale 1:1; looking down (along -Z)

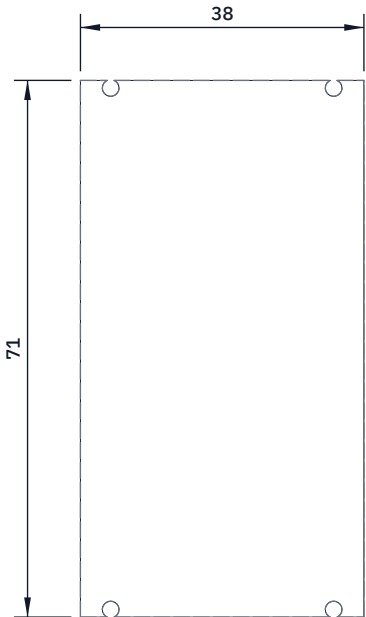


FRONT VIEW

Scale 1:1; looking at the front (along +Y)



RIGHT VIEW

Scale 1:1; looking at the right side (along -X)

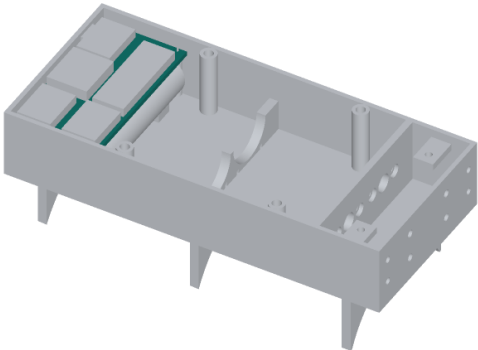

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

A flat plate 37.5 x 71 x 2 mm, printed flat.

Four 2.2 mm holes, 4 mm in from each end and 34.5 mm each side of the centre line, over the four tray posts in the pack base.

Lay out the boards on top (stick them on with double-sided foam tape): rear row, from the thumb side: charger (USB-C port to the rear wall), controller, driver 1; front row: battery board, driver 2.

Fits: rests on the four posts, 1 mm above the cells, with a 1 mm foam pad between; four M2.2 self-tapping screws hold it and the cells.

Check: the charger's USB-C port lines up with the rear wall opening.

FLEXHAND				github.com/BoujeeEnjinia1701/flexhand			
FlexHand electronics tray: making sketch							
DRAWING NO. FXH-DWG-107			REV P1		SHEET 1 of 1		SIZE ANSI B
SCALE 1:1	UNITS mm	PROJECTION 		DATE 2026-10-01		DRAWN Amish Chadha	
MATERIAL / NOTES PETG, 3D printed, 2 mm, solid							
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com				Generated from cad/src; do not edit by hand			