



REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-01	AC

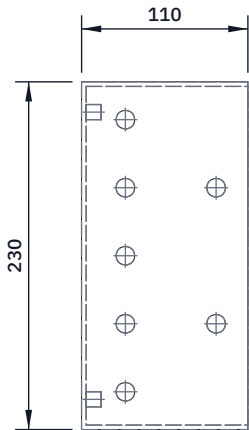


TOP VIEW

Scale 1:5; looking down (along -Z)

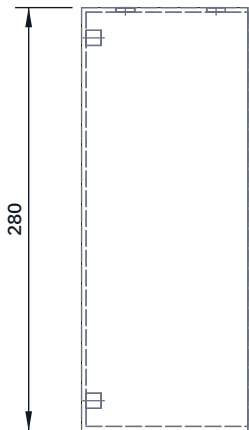


FRONT VIEW

Scale 1:5; looking at the front (along +Y)

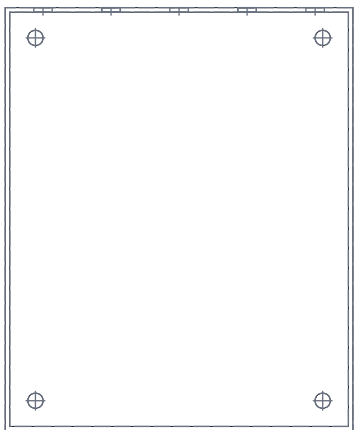

RIGHT VIEW

Scale 1:5; looking at the right side (along -X)

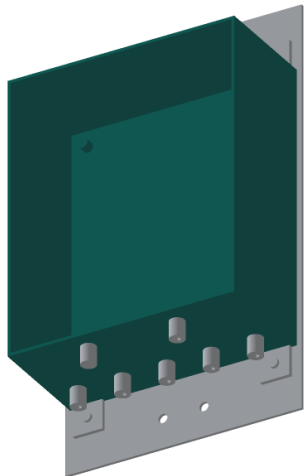

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Drawn upside down: stand the box on its top, lid side toward you.

Seven 12.2 mm holes in the bottom face, measured from the back face and sideways from the centre line (right as seen from the lid):

Back row, 29 mm from the back face: relay cable 90 left, probe lead 45 left, ambient lead on the centre line, antenna coax 45 right, panel lead 90 right.

Front row, 89 mm from the back face: vent 45 left, bus cable 45 right.

Tape the face, pilot drill 3 mm slowly with wood behind, open out with a step drill, light pressure. No solvents: polycarbonate crazes.

Deburr inside and out. Fit the six M12 glands and the vent, nuts inside.

Fit the maker's four lugs at the back corners, above and below the box.

Check: every gland seats flat; no crack runs out from any hole.

GRAINGUARD

github.com/BoujeeEnjinia1701/grainguard

GrainGuard enclosure body: drilling sketch

DRAWING NO. GGD-DWG-106			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:5	UNITS mm	PROJECTION 	DATE 2026-10-01		DRAWN Amish Chadha
MATERIAL / NOTES Bought IP66 polycarbonate box 280 x 230 x 130 mm					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com				Generated from cad/src; do not edit by hand	