REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-01	AC



TOP VIEW

Scale 1:5; looking down (along -Z)

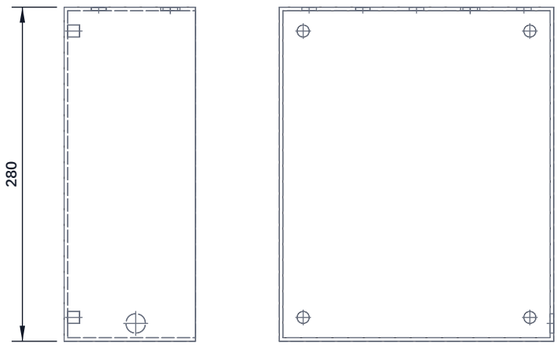

FRONT VIEW

Scale 1:5; looking at the front (along +Y)

RIGHT VIEW

Scale 1:5; looking at the right side (along -X)

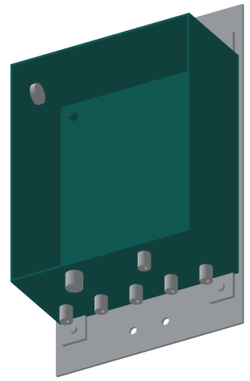

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Drawn upside down: stand the box on its top, lid side toward you.
Six 12.2 mm and one 16.2 mm hole in the bottom face, from the back face and sideways from the centre line (right as seen from the lid):
Back row, 29 mm from the back face: relay cable 90 left, probe lead 45 left, ambient lead on the centre line, antenna coax 45 right, panel lead 90 right.
Front row, 89 mm from the back face: vent (16.2) 45 left, bus cable 45 right.
Left side wall: one 16.2 mm hole for the upper vent, 60 mm from the back face, its centre 15 mm below the top.
Tape the face, pilot drill 3 mm slowly with wood behind, open out with a step drill, light pressure. No solvents: polycarbonate crazes.
Deburr inside and out. Fit the six M12 glands and the two M16 labyrinth vents.
Fit the maker's four lugs at the back corners, above and below the box.
Check: every gland seats flat; no crack runs out from any hole.

GRAINGUARD

github.com/BoujeeEnjinia1701/grainguard

GrainGuard enclosure body: drilling sketch

DRAWING NO.	REV	SHEET	SIZE
GGD-DWG-106	P1	1 of 1	ANSI B

SCALE	UNITS	PROJECTION	DATE	DRAWN
1:5	mm		2026-10-01	Amish Chadha

MATERIAL / NOTES

Bought IP66 polycarbonate box 280 x 230 x 130 mm

Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com

Generated from cad/src; do not edit by hand