



REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-01	AC
P2	Drop rod hole in the top; gland moved; back holes removed	2026-10-02	AC

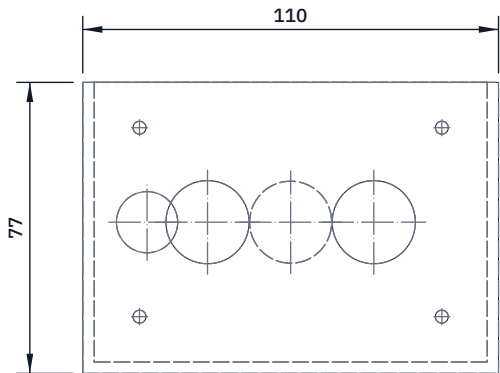


TOP VIEW

Scale 1:2; looking down (along -Z)

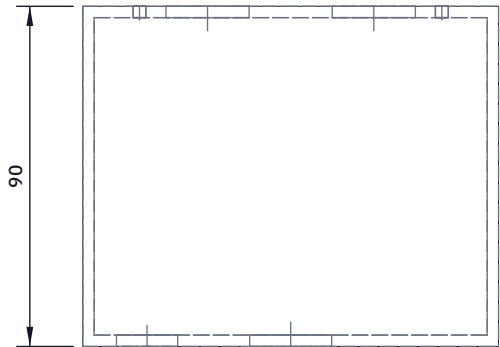


FRONT VIEW

Scale 1:2; looking at the front (along +Y)



RIGHT VIEW

Scale 1:2; looking at the right side (along -X)

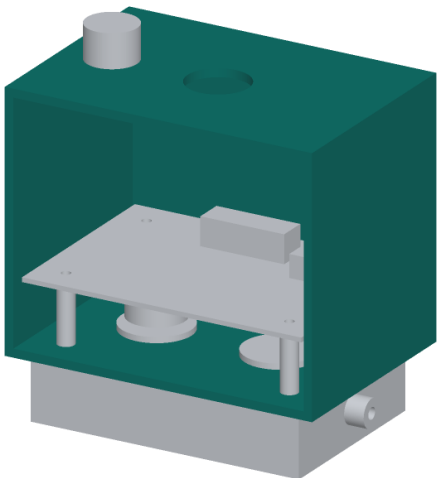

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Drawn upside down: the top view shows the floor (the face with the ports).

Floor: two 22 mm sensor ports, 22 mm each side of the centre, on the centre line front to back. The 25 mm discs rest on the 1.5 mm ledge.

Floor: four 3.4 mm holes for the standoff screws, 40 mm each side of centre and 25 mm each side of the front-to-back centre line.

Top: one 21.7 mm hole at the centre for the drop rod, and one 16.2 mm hole 38 mm left of it for the M16 cable gland.

No holes in the back: the box hangs from the drop rod.

Tape the faces, pilot drill 3 mm, open the ports with a step drill.

Deburr; clean with water only (solvent residue poisons the sensor).

Check: a disc laid on each port covers it with an even ledge all round.

H2GUARD

github.com/BoujeeEnjinia1701/h2guard

H2Guard detector head box: drilling sketch

DRAWING NO. HGD-DWG-101			REV P2	SHEET 1 of 1	SIZE ANSI B
SCALE 1:2	UNITS mm	PROJECTION 	DATE 2026-10-02		DRAWN Amish Chadha
MATERIAL / NOTES Bought ABS or polycarbonate box 110 x 80 x 90 mm, lid on the 110 x 90 face					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com					Generated from cad/src; do not edit by hand