



REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-01	AC

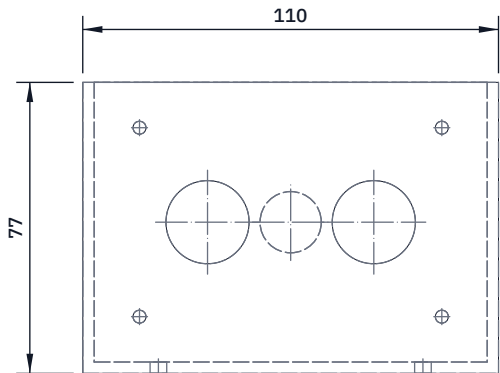


TOP VIEW

Scale 1:2; looking down (along -Z)

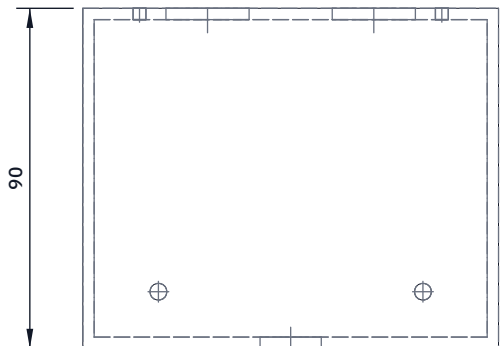


FRONT VIEW

Scale 1:2; looking at the front (along +Y)



RIGHT VIEW

Scale 1:2; looking at the right side (along -X)

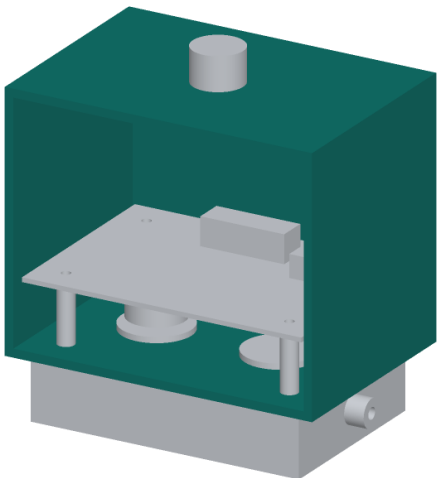

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Drawn upside down: the top view shows the floor (the face with the ports).

Floor: two 22 mm sensor ports, 22 mm each side of the centre, on the centre line front to back. The 25 mm discs rest on the 1.5 mm ledge.

Floor: four 3.4 mm holes for the standoff screws, 40 mm each side of centre and 25 mm each side of the front-to-back centre line.

Top: one 16.2 mm hole at the centre for the M16 cable gland.

Back: two 4.4 mm wall screw holes, 35 mm each side of centre, 15 mm below the top. The lid face points into the room.

Tape the faces, pilot drill 3 mm, open the ports with a step drill.

Deburr; clean with water only (solvent residue poisons the sensor).

Check: a disc laid on each port covers it with an even ledge all round.

H2GUARD

github.com/BoujeeEnjinia1701/h2guard

H2Guard detector head box: drilling sketch

DRAWING NO. HGD-DWG-101		REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:2	UNITS mm	PROJECTION 	DATE 2026-10-01	DRAWN Amish Chadha
MATERIAL / NOTES Bought ABS or polycarbonate box 110 x 80 x 90 mm, lid on the 110 x 90 face				
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com			Generated from cad/src; do not edit by hand	