


REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-09-30	AC
P2	M12 pin numbers added to the notes (decision of 2026-10-02)	2026-10-02	AC



TOP VIEW

Scale 1:1; looking down (along -Z)

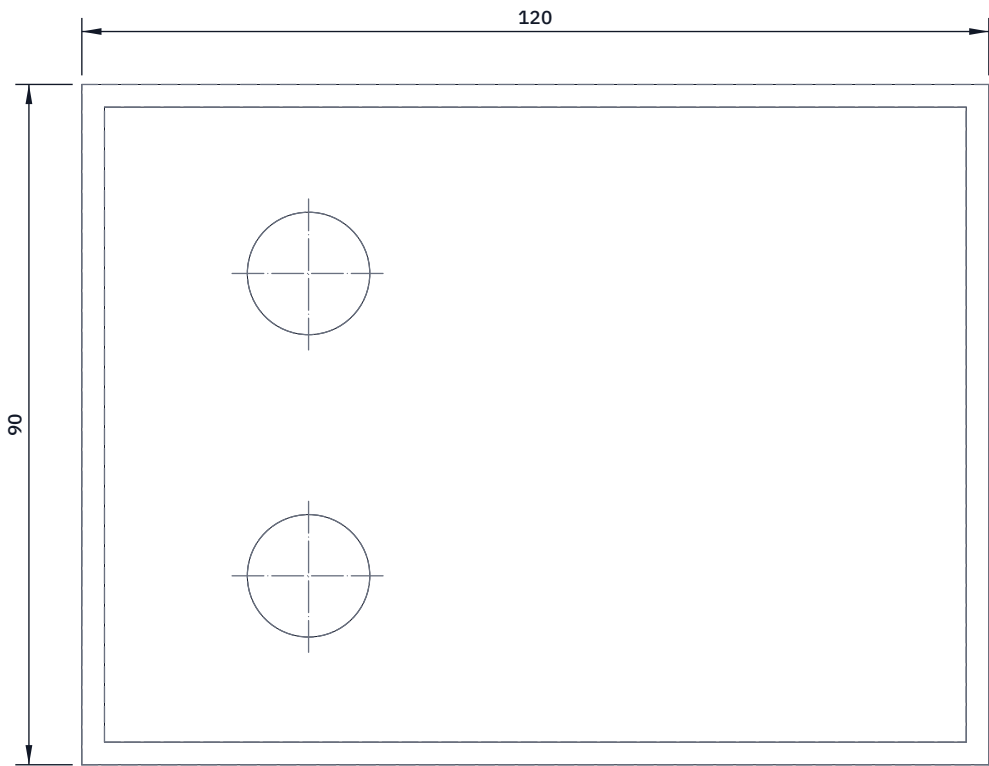


FRONT VIEW

Scale 1:1; looking at the front (along +Y)



RIGHT VIEW

Scale 1:1; looking at the right side (along -X)

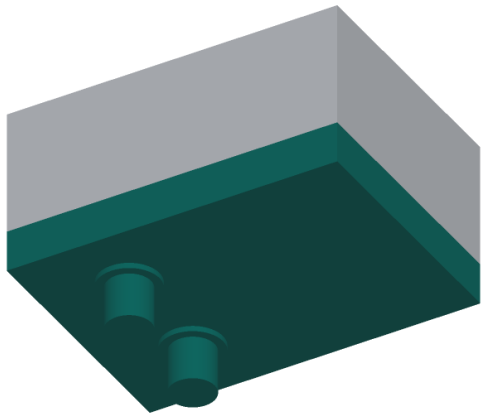

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

The lid is 15 mm deep and faces the street below.
Two 16.2 mm holes for the M12 expansion ports, 30 mm toward the pole end from the middle, 20 mm each side of the centre line (40 apart).
Drill as for the box: tape, 3 mm pilot, step drill, deburr.
Fit each port from outside with its seal, nut inside, maker's torque.
Solder a 150 mm lead set to each port and fit a plug-in connector, so the lid can come off without a soldering iron.
Wire each port to the pinout proposed to FieldNode: pin 1 12 V supply, pin 3 ground, pins 2 and 4 the RS-485 pair, pin 5 wake line.
Check: each port seats flat on its seal; the lid gasket is unbroken.

LAMPNODE

github.com/BoujeeEnjinia1701/lampnode

LampNode sensor head lid (bought): drilling sketch

DRAWING NO. LPN-DWG-106			REV P2	SHEET 1 of 1	SIZE ANSI B
SCALE 1:1	UNITS mm	PROJECTION 	DATE 2026-10-02		DRAWN Amish Chadha
MATERIAL / NOTES Lid of the bought IP66 box, polycarbonate					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com				Generated from cad/src; do not edit by hand	