



REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-09-30	AC




TOP VIEW
Scale 1:2; looking down (along -Z)

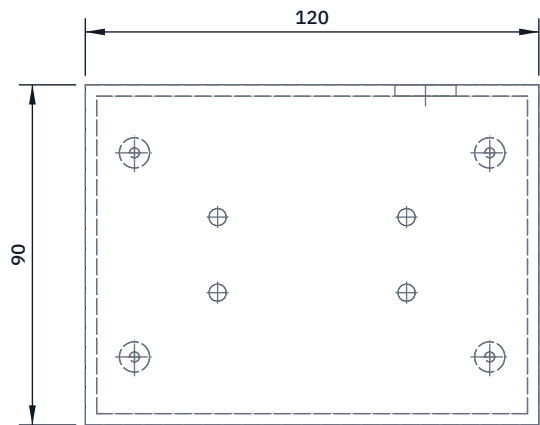

FRONT VIEW
Scale 1:2; looking at the front (along +Y)



RIGHT VIEW
Scale 1:2; looking at the right side (along -X)

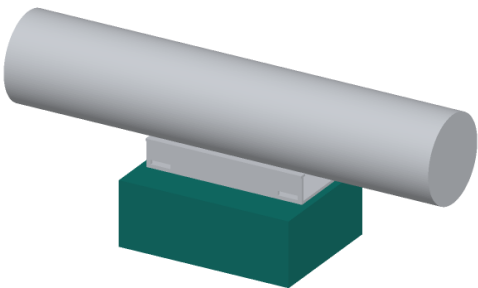

WHERE IT GOES
This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Bought box; its base faces up and its 15 mm lid faces down.

The end wall facing the street end of the arm is the radar window:
never drill it, paint it or put a label on it.

Top face: four 4.5 mm holes for the bracket screws, 25 mm each side of the middle along the box and 10 mm each side across it.

Left side wall, seen from the pole: one 16.2 mm hole for the cable gland, 30 mm toward the street end from the middle, 20 mm below the top.

Tape the faces, pilot drill 3 mm slowly, open out with a step drill.

No solvents: polycarbonate crazes. Deburr inside and out.

Check the four inside bosses are 94 x 54 mm apart; if not, move the internal plate holes to suit.

LAMPNODE				github.com/BoujeeEnjinia1701/lampnode			
LampNode sensor head box (bought): drilling sketch							
DRAWING NO. LPN-DWG-105			REV P1		SHEET 1 of 1		SIZE ANSI B
SCALE 1:2	UNITS mm	PROJECTION 		DATE 2026-09-30		DRAWN Amish Chadha	
MATERIAL / NOTES Bought IP66 polycarbonate box 120 x 90 x 60 mm							
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com							
Generated from cad/src; do not edit by hand							