


REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-09-30	AC




TOP VIEW
Scale 1:1; looking down (along -Z)

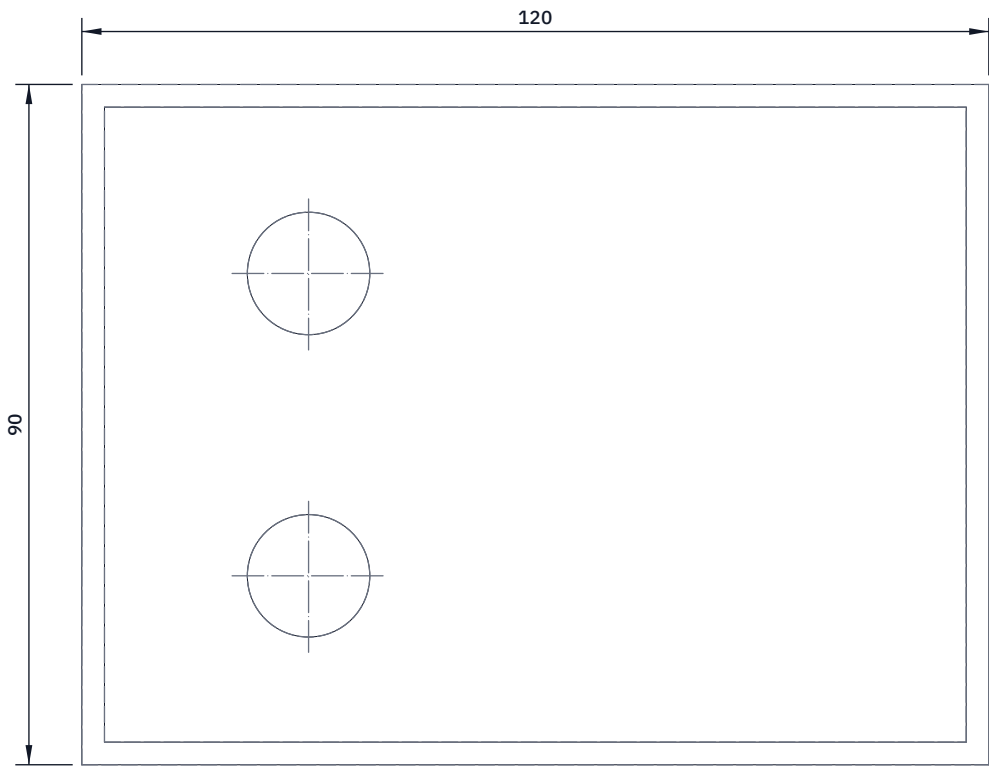

FRONT VIEW
Scale 1:1; looking at the front (along +Y)



RIGHT VIEW
Scale 1:1; looking at the right side (along -X)

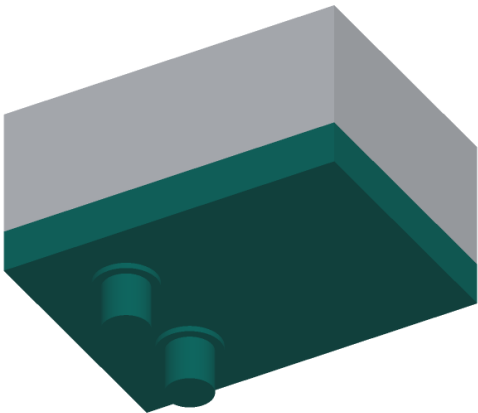

WHERE IT GOES
This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

The lid is 15 mm deep and faces the street below.

Two 16.2 mm holes for the M12 expansion ports, 30 mm toward the pole end from the middle, 20 mm each side of the centre line (40 apart).

Drill as for the box: tape, 3 mm pilot, step drill, deburr.

Fit each port from outside with its seal, nut inside, maker's torque.

Solder a 150 mm lead set to each port and fit a plug-in connector, so the lid can come off without a soldering iron.

Check: each port seats flat on its seal; the lid gasket is unbroken.

LAMPNODE				github.com/BoujeeEnjinia1701/lampnode					
LampNode sensor head lid (bought): drilling sketch									
DRAWING NO. LPN-DWG-106				REV P1		SHEET 1 of 1		SIZE ANSI B	
SCALE 1:1		UNITS mm	PROJECTION 			DATE 2026-09-30		DRAWN Amish Chadha	
MATERIAL / NOTES Lid of the bought IP66 box, polycarbonate									
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com								Generated from cad/src; do not edit by hand	