




REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-01	AC

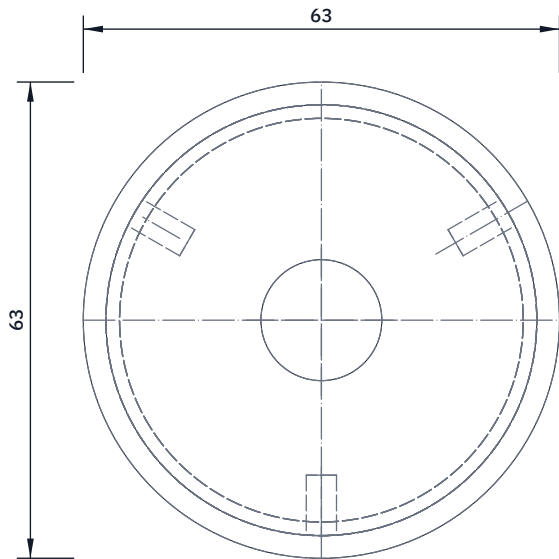

TOP VIEW
Scale 1:1; looking down (along -Z)

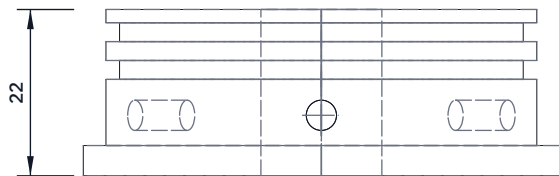

FRONT VIEW
Scale 1:1; looking at the front (along +Y)

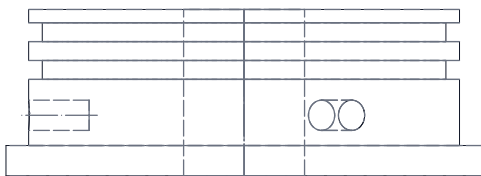

RIGHT VIEW
Scale 1:1; looking at the right side (along -X)



WHERE IT GOES
This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Turn as the top plug: flange 63 mm x 4 mm, spigot 57 mm x 18 mm, two O-ring grooves 2.5 x 1.8 mm, 10 and 15 mm above the flange.

Centre hole: drill 14.5 mm and tap M16 x 1.5 right through, for the front-mount M12 panel socket (check its thread first).

Face the outside of the flange flat where the socket's O-ring sits.

Radial holes: drill 3.3 mm, tap M4, through the tube's holes, 4 mm above the flange, 120 degrees apart.

Fit: the socket screws in from outside with its O-ring under its flange; its lock nut and the board lead are inside.

Check: the socket seats flat; the plug pushes in by hand.

LEAKLISTEN

github.com/BoujeeEnjinia1701/leaklisten

LeakListen bottom end plug: making sketch

DRAWING NO. LKL-DWG-105			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:1	UNITS mm	PROJECTION 	DATE 2026-10-01		DRAWN Amish Chadha
MATERIAL / NOTES Acetal (POM) round bar, 65 mm					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com				Generated from cad/src; do not edit by hand	