


REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-01	AC




TOP VIEW
Scale 1:1; looking down (along -Z)

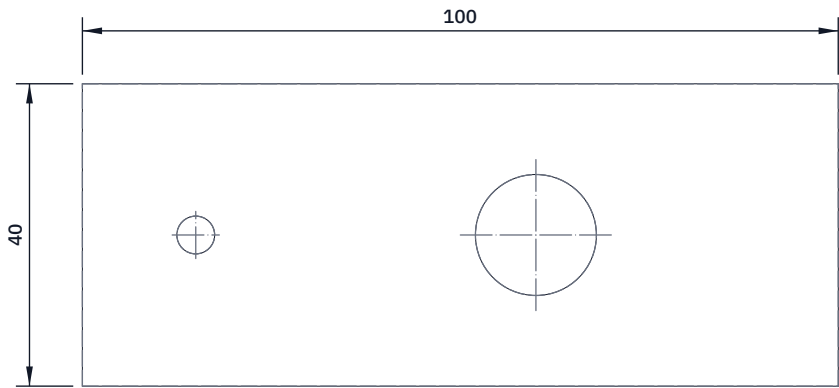

FRONT VIEW
Scale 1:1; looking at the front (along +Y)



RIGHT VIEW
Scale 1:1; looking at the right side (along -X)

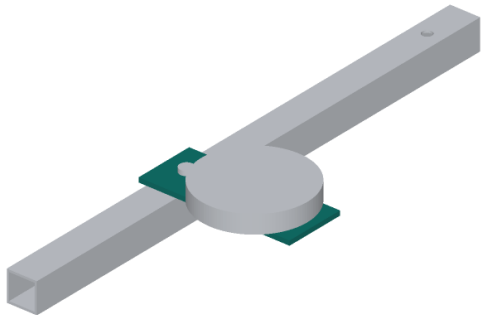

WHERE IT GOES
This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Cut 100 mm of 40 x 3 mm flat bar; round the corners 3 mm, deburr.

On the centre line: bolt hole 5.5 mm, 15 mm from one end;
antenna stud hole 60 mm from the same end, sized to the antenna's
stud (16.5 mm for an M16 stud; check its datasheet).

Fit: the bracket lies flat across the top of the outer tube, the
bolt hole over the tube; one M5 x 30 bolt through bracket and
tube, nyloc nut under the tube.

The antenna sits on top, its stud through the large hole, nut
underneath; the antenna is 45 mm off the bar's centre line.

Check: the antenna sits flat and the bracket cannot turn when
the bolt is tight (bracket edge against your thumb).

LEAKLISTEN

github.com/BoujeeEnjinia1701/leaklisten

LeakListen antenna bracket: making sketch

DRAWING NO. LKL - DWG - 109			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:1	UNITS mm	PROJECTION 	DATE 2026-10-01		DRAWN Amish Chadha
MATERIAL / NOTES Aluminium flat bar 40 x 3 mm, 6082					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com				Generated from cad/src; do not edit by hand	