REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-01	AC



TOP VIEW

Scale 1:1; looking down (along -Z)



FRONT VIEW

Scale 1:1; looking at the front (along +Y)



RIGHT VIEW

Scale 1:1; looking at the right side (along -X)

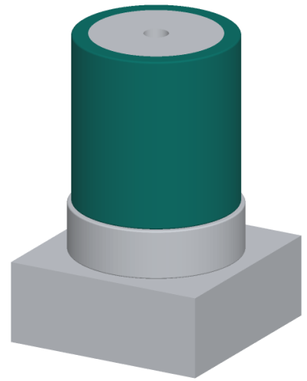

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Turn from 45 mm 6061 bar: 40 mm diameter, 42 mm long.
Base 8 mm thick. Centre drill and drill 5.0 mm, 8 mm deep, in the bottom face; tap M6, 6 mm of full thread, for the magnet's stud.
Lower bore 29 mm diameter, from the top of the base up 25 mm.
Upper bore 32 mm diameter, from there to the top (9 mm): the step between the bores carries the preamplifier board.
Face the base inside flat and smooth (0.8 or better): the piezo disc is bonded to it and the signal passes through it.
Break all outside edges 0.5 mm. Bead blast if you can.
Fit: magnet stud into the base with threadlocker; disc and mass on the base; board on the step; potting above the board only.
Check: the base face is flat; the M6 stud runs in by hand.

LEAKLISTEN github.com/BoujeeEnjinia1701/leaklisten

LeakListen sensor puck body: making sketch

DRAWING NO.	REV	SHEET	SIZE
LKL-DWG-101	P1	1 of 1	ANSI B

SCALE	UNITS	PROJECTION	DATE	DRAWN
1:1	mm		2026-10-01	Amish Chadha

MATERIAL / NOTES
Aluminium 6061 round bar, 45 mm

Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com

Generated from cad/src; do not edit by hand