REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-01	AC

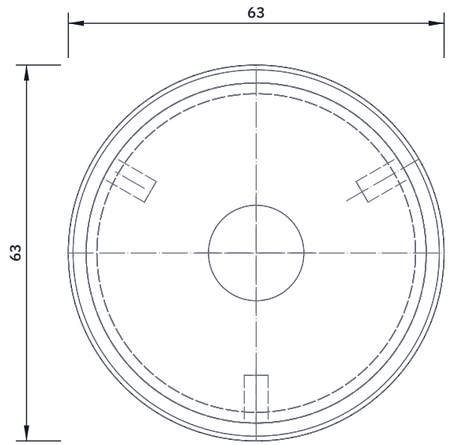

TOP VIEW

Scale 1:1; looking down (along -Z)

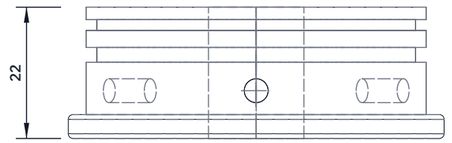

FRONT VIEW

Scale 1:1; looking at the front (along +Y)

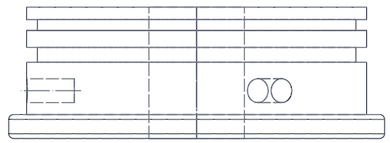

RIGHT VIEW

Scale 1:1; looking at the right side (along -X)

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Turn as the top plug: flange 63 mm x 4 mm, spigot 57 mm x 18 mm,
two O-ring grooves 2.5 x 1.8 mm, 10 and 15 mm above the flange.
Centre hole: drill 14.5 mm and tap M16 x 1.5 right through, for
the front-mount M12 panel socket (check its thread first).
Face the outside of the flange flat where the socket's O-ring sits.
Radial holes: drill 3.3 mm, tap M4, through the tube's holes,
4 mm above the flange, 120 degrees apart.
Fit: the socket screws in from outside with its O-ring under its
flange; its lock nut and the board lead are inside.
Check: the socket seats flat; the plug pushes in by hand.

LEAKLISTEN github.com/BoujeeEnjinia1701/leaklisten

LeakListen bottom end plug: making sketch

DRAWING NO.	REV	SHEET	SIZE
LKL-DWG-105	P1	1 of 1	ANSI B

SCALE	UNITS	PROJECTION	DATE	DRAWN
1:1	mm		2026-10-01	Amish Chadha

MATERIAL / NOTES

Acetal (POM) round bar, 65 mm

Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com

Generated from cad/src; do not edit by hand