BUILD PLAN SKETCH, PLAN NOT YET BUILT

LeakListen · github.com/BoujeeEnjinia1701/leaklisten

REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-01	AC



TOP VIEW

Scale 1:2; looking down (along -Z)

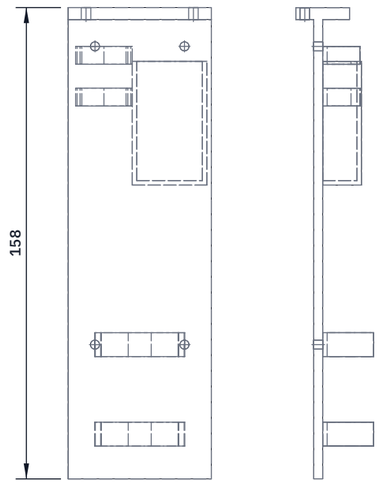

FRONT VIEW

Scale 1:2; looking at the front (along +Y)

RIGHT VIEW

Scale 1:2; looking at the right side (along -X)

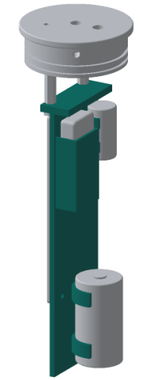

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Print lying on its board face, with support under the 6 mm of the top tab that stands out on that side. Spine 48 x 3 x 158 mm.
Top tab 48 x 18 x 4 mm across the top of the spine, with two 3.2 mm holes 18 mm each side of centre, 6 mm out on the board side: M3 screws up through these (before the board goes on) into the two M3 x 20 standoffs that hang it from the top plug.
Clip face (dashed in the front view), from the top: two clips for the 16 mm capacitor, 8 and 30 mm down; a 22 x 10 x 50 mm pocket for the desiccant, open at the top; at the bottom, two clips for the C cell, 10 and 40 mm up from the bottom edge. Clips wrap about 200 degrees.
Board face: four 2.5 mm pilot holes for the board standoffs, 30 mm apart across and 100 mm apart down.
Fit: the cell and capacitor snap into their clips.
Check: it slides into the tube with 2.5 mm to spare all round.

LEAKLISTEN

github.com/BoujeeEnjinia1701/leaklisten

LeakListen internal chassis: making sketch

DRAWING NO.	REV	SHEET	SIZE
LKL-DWG-106	P1	1 of 1	ANSI B

SCALE	UNITS	PROJECTION	DATE	DRAWN
1:2	mm		2026-10-01	Amish Chadha

MATERIAL / NOTES

PETG, 3D printed, 40 % infill

Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com

Generated from cad/src; do not edit by hand