REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-01	AC

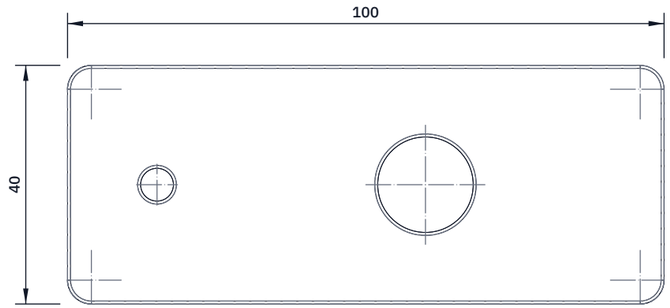

TOP VIEW

Scale 1:1; looking down (along -Z)

FRONT VIEW

Scale 1:1; looking at the front (along +Y)

RIGHT VIEW

Scale 1:1; looking at the right side (along -X)

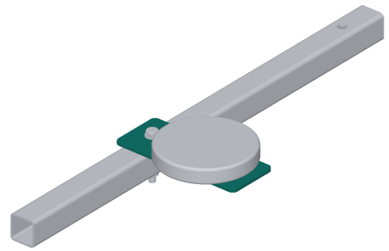

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Cut 100 mm of 40 x 3 mm flat bar; round the corners 3 mm, deburr.
On the centre line: bolt hole 5.5 mm, 15 mm from one end;
antenna stud hole 60 mm from the same end, sized to the antenna's
stud (16.5 mm for an M16 stud; check its datasheet).
Fit: the bracket lies flat across the top of the outer tube, the
bolt hole over the tube; one M5 x 30 bolt through bracket and
tube, nyloc nut under the tube.
The antenna sits on top, its stud through the large hole, nut
underneath; the antenna is 45 mm off the bar's centre line.
Check: the antenna sits flat and the bracket cannot turn when
the bolt is tight (bracket edge against your thumb).

LEAKLISTEN github.com/BoujeeEnjinia1701/leaklisten

LeakListen antenna bracket: making sketch

DRAWING NO.	REV	SHEET	SIZE
LKL-DWG-109	P1	1 of 1	ANSI B

SCALE	UNITS	PROJECTION	DATE	DRAWN
1:1	mm		2026-10-01	Amish Chadha

MATERIAL / NOTES
Aluminium flat bar 40 x 3 mm, 6082

Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com

Generated from cad/src; do not edit by hand