



REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-01	AC

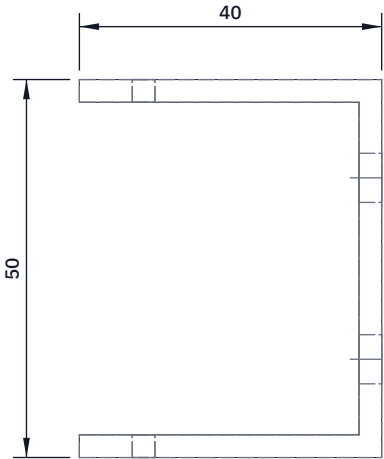


TOP VIEW

Scale 1:1; looking down (along -Z)

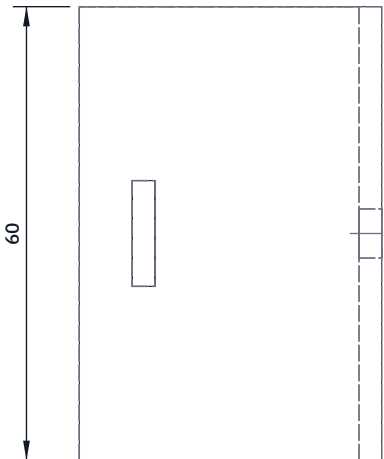


FRONT VIEW

Scale 1:1; looking at the front (along +Y)

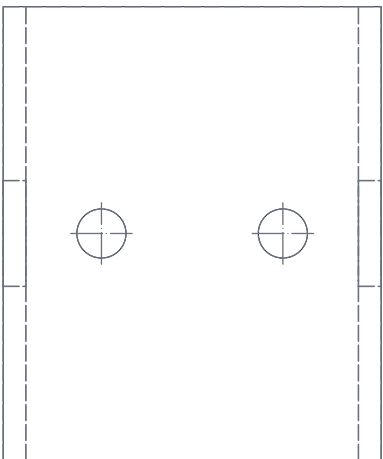

RIGHT VIEW

Scale 1:1; looking at the right side (along -X)

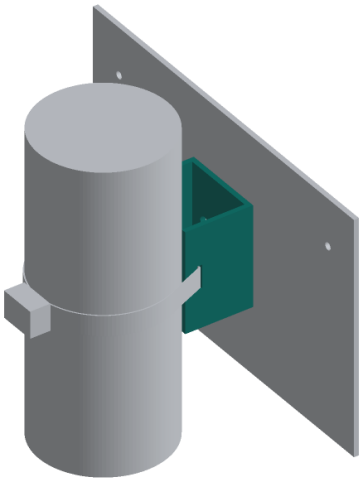

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Cut two 60 mm lengths of 50 x 40 x 3 mm channel; square and deburr the ends, and break the sharp edges of the flange ends.

Web (the 50 mm face that goes on the sign): two 6.5 mm holes, 12 mm each side of centre, half way along (30 mm).

Flanges: one band slot in each, 3 mm wide and 14 mm long along the channel, centred half way along and 8.5 mm from the flange end. Chain drill 3 mm and file square.

Fit: the web sits flat on the back of the sign face on two M6 button-head bolts from the front, nyloc nuts inside the channel.

The two flange ends bear on the pole; the band runs in through one slot, across in front of the pole, out of the other slot and round the back of the pole. Poles 60 to 90 mm seat.

Check: both slots line up; the bolts clear the band.

LOADZONE

github.com/BoujeeEnjinia1701/loadzone

LoadZone sign bracket (make 2): making sketch

DRAWING NO. LDZ-DWG-105			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:1	UNITS mm	PROJECTION 	DATE 2026-10-01		DRAWN Amish Chadha
MATERIAL / NOTES Aluminium U-channel 50 x 40 x 3 mm, 6063 class					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com					Generated from cad/src; do not edit by hand