


REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-01	AC



TOP VIEW
Scale 1:5; looking down (along -Z)

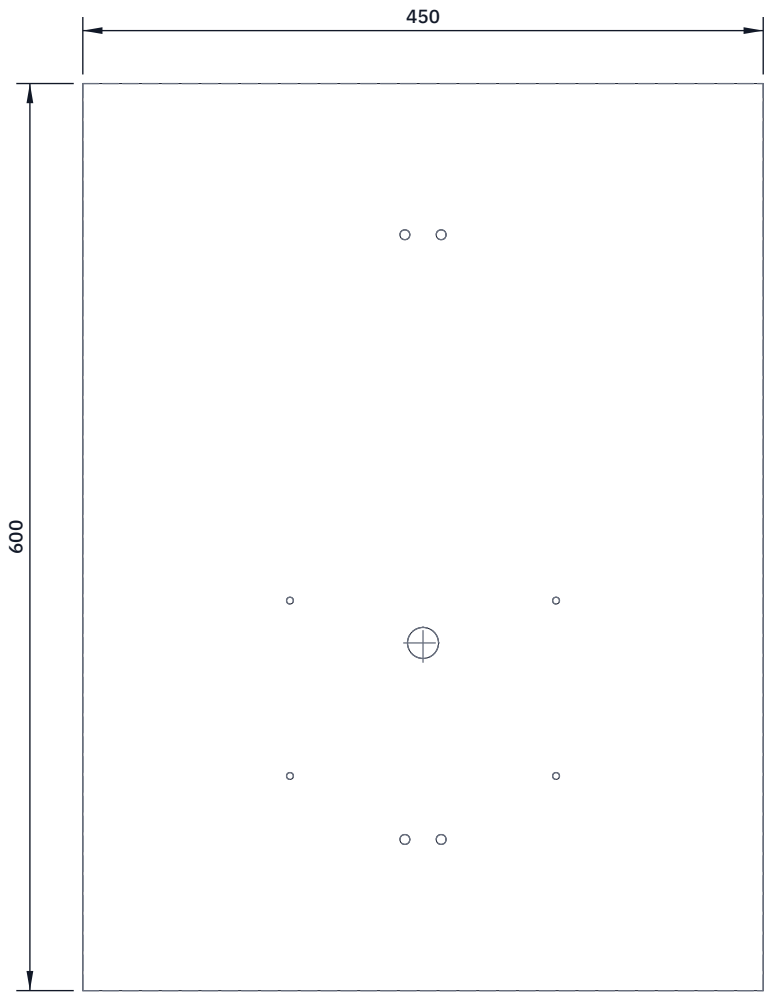

FRONT VIEW
Scale 1:5; looking at the front (along +Y)



RIGHT VIEW
Scale 1:5; looking at the right side (along -X)



WHERE IT GOES
This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Drawn laid flat, printed side up. Bought from a sign maker with the legend printed; drill it here.

Heights from the bottom edge, sideways from the centre line.

Bracket bolts: four 6.5 mm holes, 12 mm each side of centre, 100 and 500 mm up.

Display housing screws: four 4.5 mm holes, 88 mm each side of centre, 142 and 258 mm up.

Cable gland: one 20.5 mm hole on the centre line, 230 mm up (step drill).

Back the panel with scrap wood; drill from the printed side so the face does not lift. Deburr and peel the film.

The sign face drilling layout picture repeats these positions.

Check: hold a bracket and the housing to the panel and look through each hole.

LOADZONE		github.com/BoujeeEnjinia1701/loadzone		
LoadZone sign face (option): drilling sketch				
DRAWING NO. LDZ-DWG-106		REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:5	UNITS mm	PROJECTION 	DATE 2026-10-01	DRAWN Amish Chadha
MATERIAL / NOTES Aluminium composite panel 450 x 600 x 3 mm, printed legend				
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com			Generated from cad/src; do not edit by hand	