



REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-01	AC

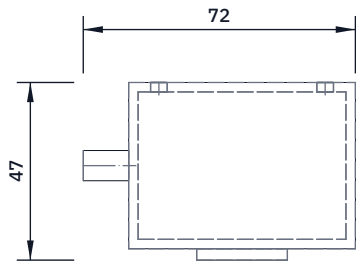


TOP VIEW

Scale 1:2; looking down (along -Z)

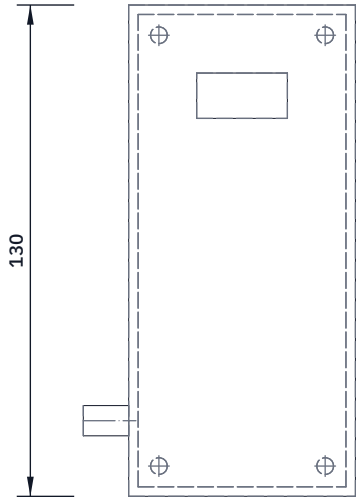


FRONT VIEW

Scale 1:2; looking at the front (along +Y)

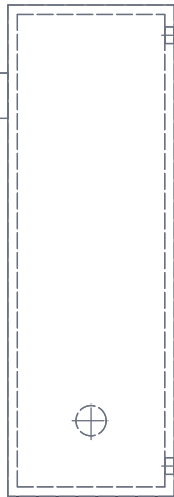

RIGHT VIEW

Scale 1:2; looking at the right side (along -X)

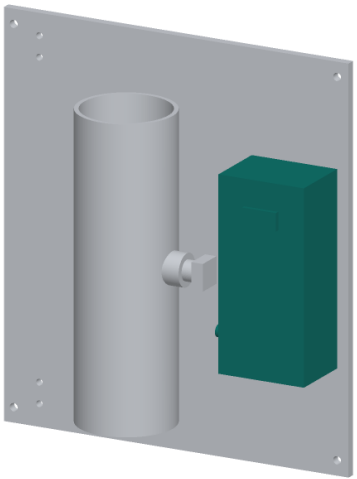

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Body: a box 60 wide x 44 deep x 130 tall outside, walls 2.5, open at the front. Print it back face down.

Back face: four 4.4 mm holes, 8 in from each side and from the top and bottom, for M4 screws into the bracket plate.

Left side: 8 mm hole for the cable gland, 20 up from the bottom.

Inside: bosses with M3 heat-set inserts for the modules, and a pocket for the lid reed switch near the front top corner.

Lid: 60 x 130 x 2.5 with a light pipe window 24 x 12 near the top; magnet for the reed switch; four M3 screws to the body.

Fit: back flat on the plate, screws from inside; the lid faces the front of the cabinet.

Check: the lid closes the reed switch; opening it opens it.

LUMAFLOW

github.com/BoujeeEnjinia1701/lumaflow

LumaFlow electronics enclosure: making sketch

DRAWING NO. LMF-DWG-111			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:2	UNITS mm	PROJECTION 	DATE 2026-10-01		DRAWN Amish Chadha
MATERIAL / NOTES PETG, 3D printed, 4 walls, 30 % infill					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com				Generated from cad/src; do not edit by hand	