



REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-02	AC

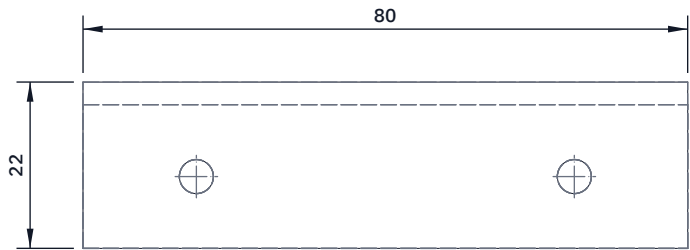

TOP VIEW

Scale 1:1; looking down (along -Z)

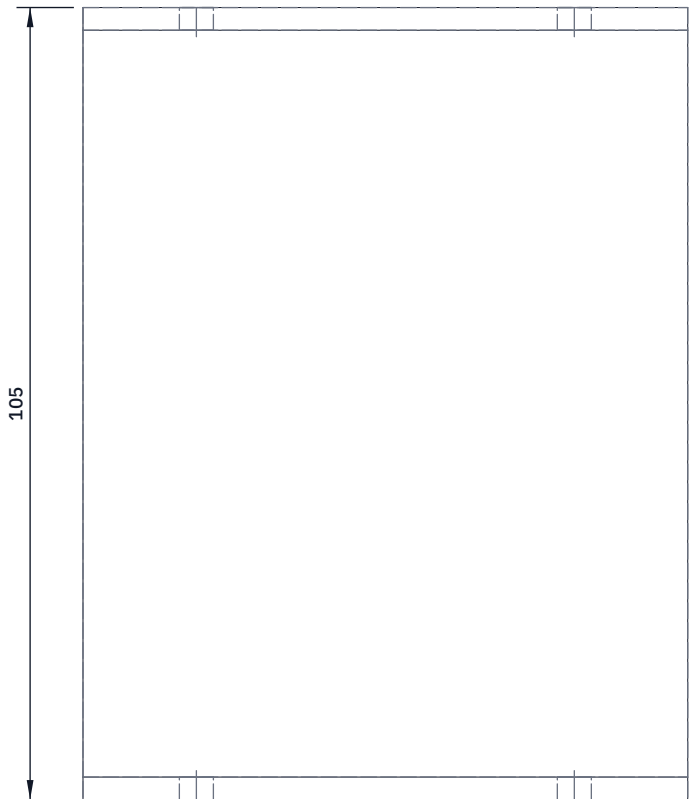


FRONT VIEW

Scale 1:1; looking at the front (along +Y)



RIGHT VIEW

Scale 1:1; looking at the right side (along -X)

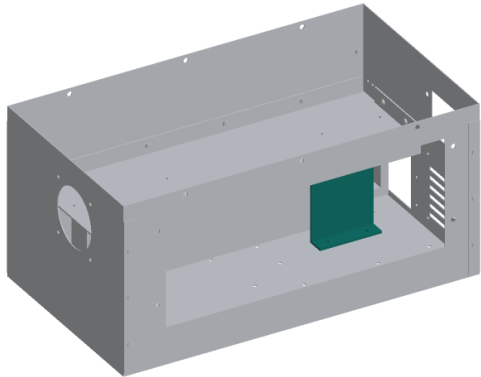

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

A channel 80 long: web 104.8 tall, two 22 mm flanges, both folded to the front (toward the inverter). 3 mm sheet; inside bend radius 3 mm.

Two 4.5 mm holes in each flange, 15 and 65 from the left end, 9.5 back from the flange's front edge.

Catch: drill the web to the catch's own holes, its centre 57 from the left end and 53.8 above the underside of the foot.

Fit: foot on the floor, two M4 button heads from below, nyloc nuts on top; top flange under the shelf, two M4 screws down through the shelf.

The web's back face is 2 mm in front of the pack's latch pawl and 12 mm in front of its latch face; the catch takes the pawl.

Check: the web is square to the floor and the catch springs freely.

POWERBOX

github.com/BoujeeEnjinia1701/powerbox

PowerBox catch bracket: making sketch

DRAWING NO. PBX-DWG-105			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:1	UNITS mm	PROJECTION 	DATE 2026-10-02		DRAWN Amish Chadha
MATERIAL / NOTES 5052 aluminium sheet 3 mm, folded					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com				Generated from cad/src; do not edit by hand	