



REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-01	AC




TOP VIEW

Scale 1:2; looking down (along -Z)

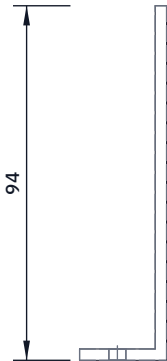


FRONT VIEW

Scale 1:2; looking at the front (along +Y)

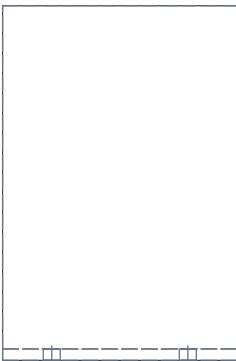

RIGHT VIEW

Scale 1:2; looking at the right side (along -X)

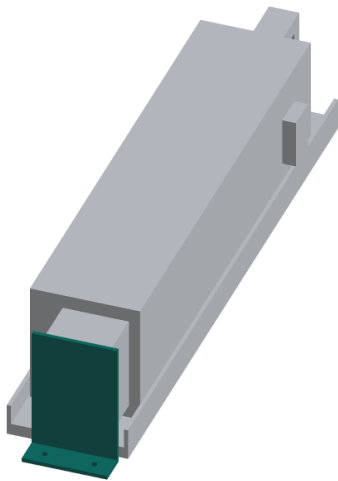

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

An angle 62 wide: web 93.8 tall, foot 23 deep, folded from 3 mm sheet.

Two 4.5 mm holes in the foot, 10 from its free edge, 13 and 49 from one side.

Web: drill to the floating-mount holes of the SwapCell receptacle (SwapCell dock drawing); the receptacle face is centred 55 above the case underside and 198 back from the outside of the front wall.

Fit: foot on the floor, foot toward the fan end, two M4 button heads from below with nyloc nuts on top.

The receptacle screws to the web's pack side through its rubber grommets, so it can float about 1 mm to meet the plug.

Check: with a pack on the runners the plug enters the receptacle without touching its sides.

POWERBOX

github.com/BoujeeEnjinia1701/powerbox

PowerBox receptacle bracket: making sketch

DRAWING NO. PBX-DWG-106			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:2	UNITS mm	PROJECTION 	DATE 2026-10-01	DRAWN Amish Chadha	
MATERIAL / NOTES 5052 aluminium sheet 3 mm, folded					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com				Generated from cad/src; do not edit by hand	