



REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-01	AC



TOP VIEW

Scale 1:1; looking down (along -Z)

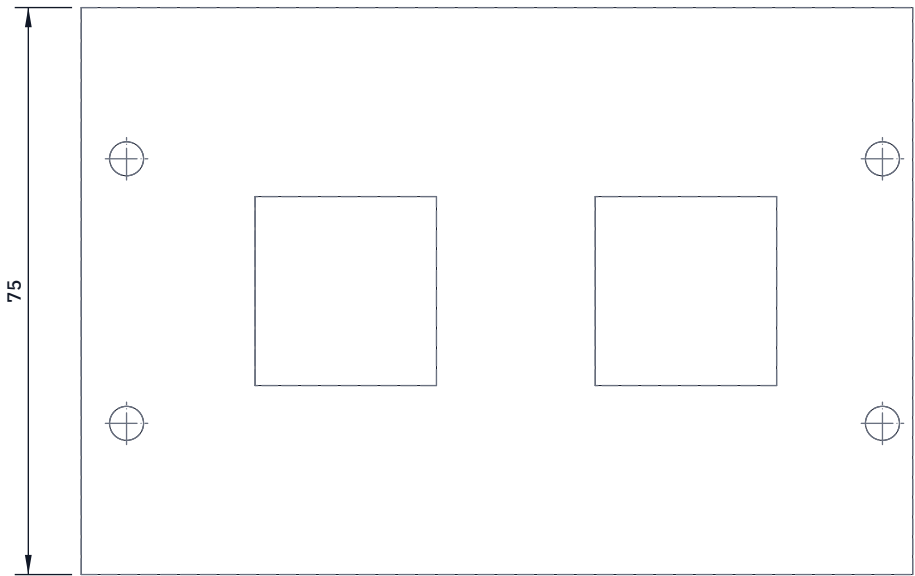


FRONT VIEW

Scale 1:1; looking at the front (along +Y)



RIGHT VIEW

Scale 1:1; looking at the right side (along -X)

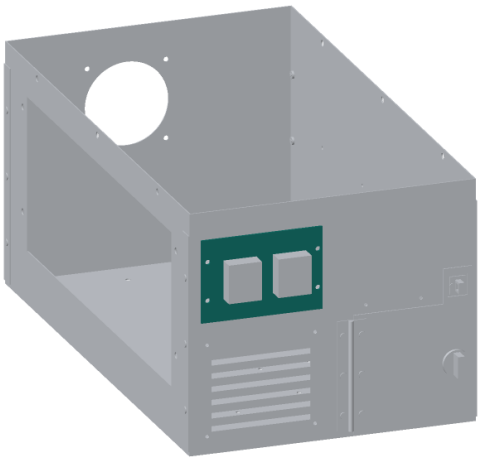

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Cut 110 wide x 75 tall.

Two Powerpole cut-outs 24 x 25: 23 to 47 and 68 to 92 from the front edge, 25 to 50 up. Size them to the panel-mount housing you buy.

Four 4.5 mm screw holes: 6 and 106 from the front edge, 20 and 55 up.

Fit: over the window in the door end wall, above the intake slots, four M4 screws into the rivet nuts.

DC in on the front cut-out, charger in on the back one; the housings are turned differently so the two plugs cannot be swapped.

Check: each plug mates with only its own socket.

POWERBOX				github.com/BoujeeEnjinia1701/powerbox			
PowerBox input panel plate: making sketch							
DRAWING NO. PBX-DWG-111			REV P1		SHEET 1 of 1		SIZE ANSI B
SCALE 1:1	UNITS mm	PROJECTION 		DATE 2026-10-01		DRAWN Amish Chadha	
MATERIAL / NOTES 5052 aluminium sheet 2 mm							
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com						Generated from cad/src; do not edit by hand	