


REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-02	AC




TOP VIEW

Scale 1:2; looking down (along -Z)

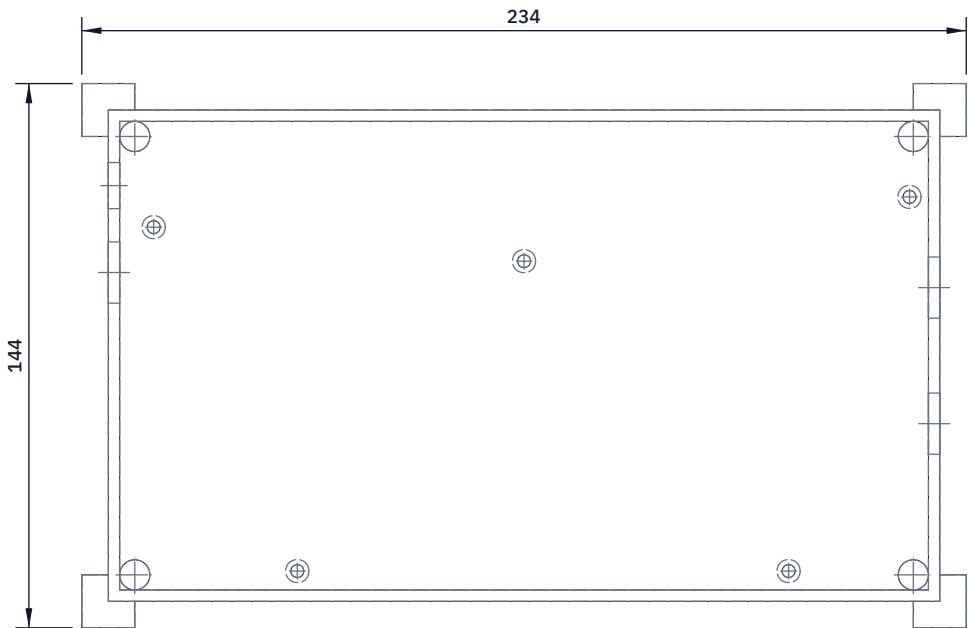


FRONT VIEW

Scale 1:2; looking at the front (along +Y)

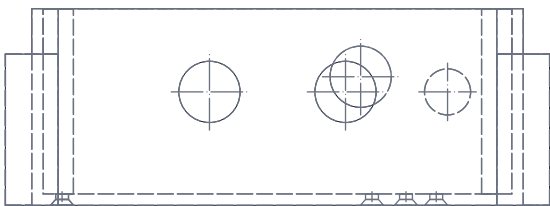

RIGHT VIEW

Scale 1:2; looking at the right side (along -X)

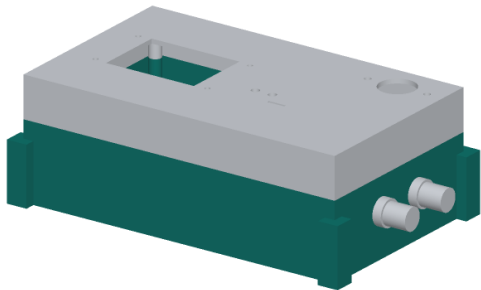

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Drill the body only. Front is the long side toward the user; right is the end the test leads leave from. Sizes from outside faces.

Right end: two 16.2 mm holes for the M16 lead glands, 47 and 83 mm from the front face, 30 mm up from the bottom.

Left end: 16.2 mm hole for the USB-C socket, 87 mm from the front face, 34 mm up; 12.2 mm hole for the M12 sensor gland, 110 mm from the front face, 30 mm up.

Floor: five 3.4 mm holes, countersunk from below for M3 screws, at the positions on the case hole layout (from the left end and front face).

Tape each face, pilot drill 2 mm with wood behind, open with a step drill at low speed. Deburr inside and out.

Check: the glands, socket and plate standoffs fit their holes.

PVTRACE

github.com/BoujeeEnjinia1701/pvtrace

PVTrace enclosure body: drilling sketch

DRAWING NO. PVT-DWG-101			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:2	UNITS mm	PROJECTION 	DATE 2026-10-02		DRAWN Amish Chadha
MATERIAL / NOTES Bought IP54 ABS handheld case 220 x 130 x 80 mm, light grey					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com				Generated from cad/src; do not edit by hand	