




REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-01	AC

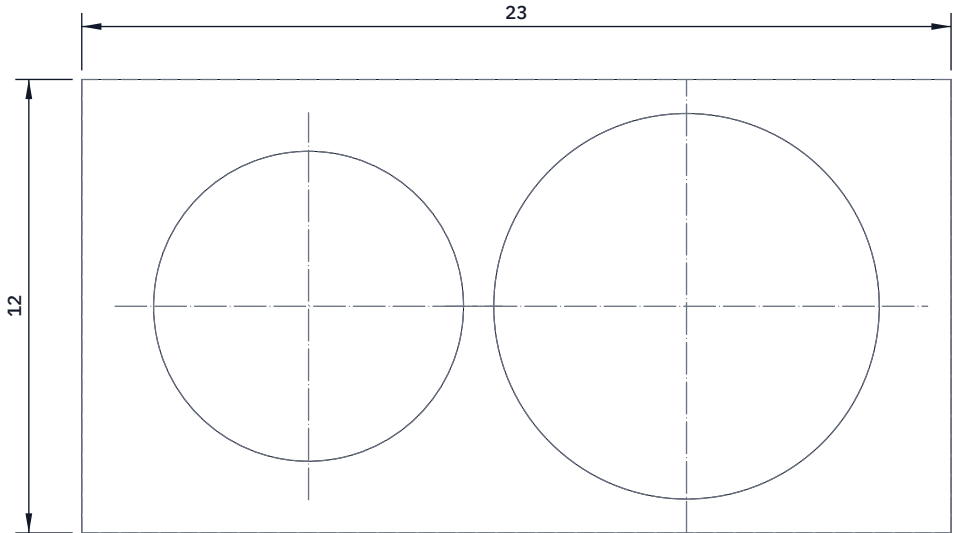

TOP VIEW
Scale 5:1; looking down (along -Z)

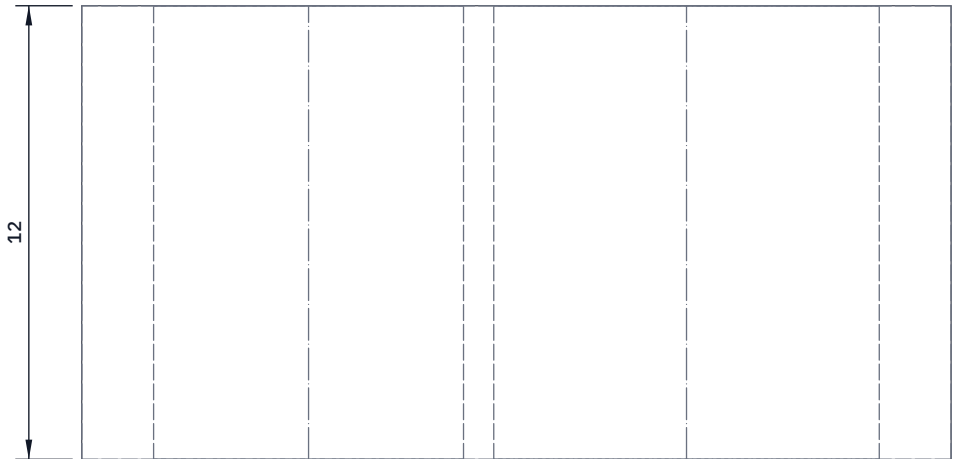

FRONT VIEW
Scale 5:1; looking at the front (along +Y)

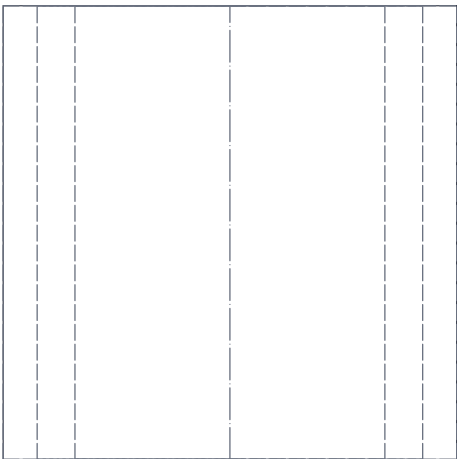

RIGHT VIEW
Scale 5:1; looking at the right side (along -X)



WHERE IT GOES
This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Block 23 long x 12 wide x 12 tall.
Rod hole 8.2 dia and dipole hole 10.2 dia, 10 mm apart centre to centre, both straight through the 12 mm height.
Print flat with the holes upright; ream with a drill if tight.
Fit: both clips slide over the rod top; the dipole slides through them so its centre is level with the rod top (1,000 mm above grade).
Clip centres 925 and 985 mm above grade; a cable tie above and below each clip stops it sliding.
Check: the rod and dipole each slide through by hand, without play.

ROOTMESH			github.com/BoujeeEnjinia1701/rootmesh		
RootMesh antenna clip (make 2): making sketch					
DRAWING NO. RMS-DWG-108			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 5:1	UNITS mm	PROJECTION 	DATE 2026-10-01		DRAWN Amish Chadha
MATERIAL / NOTES ASA, 3D printed flat					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com				Generated from cad/src; do not edit by hand	