



REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-01	AC
P2	LED lens hole added (status light decided 2026-10-02)	2026-10-02	AC

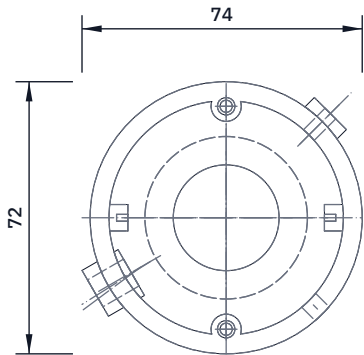


TOP VIEW

Scale 1:2; looking down (along -Z)

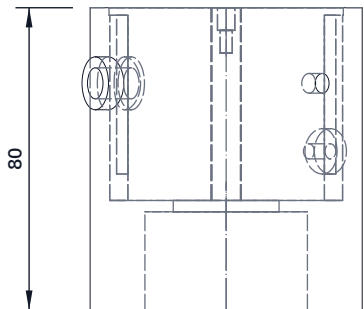


FRONT VIEW

Scale 1:2; looking at the front (along +Y)



RIGHT VIEW

Scale 1:2; looking at the right side (along -X)

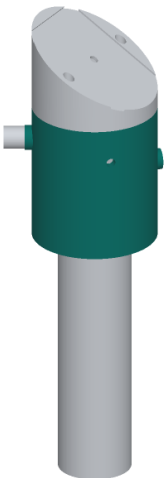

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Cup 72 dia x 80 tall. Socket at the bottom 43 dia x 26 deep for the tube; 3 mm floor with a 28 mm hole; cavity 62 dia above it, 5 mm wall.

Two board guides on the side walls, slot 1.8 wide, 3 deep, 44 tall, starting 36 above the bottom: the board stands on the slot ends.

Two bosses 8 dia, 29.5 each side of centre (at right angles to the guides), with 4.6 mm holes 6 deep for M3 heat-set inserts.

Gland boss 14 dia with an 8.2 mm hole, 60 up, toward the marker rod and 30 degrees round toward the front (away from the board).

Vent boss 12 dia with a 4 mm hole, 42 up, at the back right.

LED lens hole 5.2 dia through the wall, 60 up, front right, at least 45 degrees round from the gland and the vent.

Press the inserts in with a soldering iron at about 220 C, flush.

Check: the rim is flat (no gap under a straightedge) for the O-ring; the board slides down both guides without force; the LED's 5.8 mm flange sits against the inside wall and cannot pass the hole.

ROOTMESH

github.com/BoujeeEnjinia1701/rootmesh

RootMesh head body: making sketch

DRAWING NO. RMS-DWG-106			REV P2	SHEET 1 of 1	SIZE ANSI B
SCALE 1:2	UNITS mm	PROJECTION 	DATE 2026-10-02		DRAWN Amish Chadha
MATERIAL / NOTES ASA, 3D printed upright (socket down), 5 walls, 40 % infill					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com					Generated from cad/src; do not edit by hand