




REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-02	AC

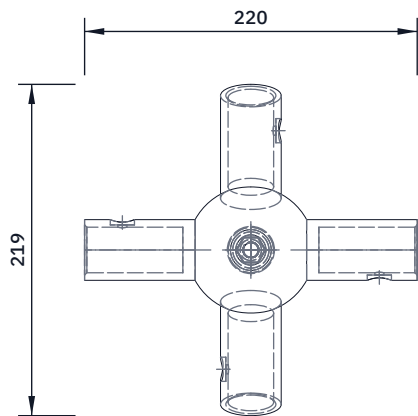


TOP VIEW
Scale 1:5; looking down (along -Z)

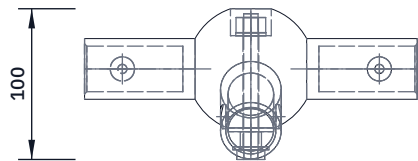

FRONT VIEW
Scale 1:5; looking at the front (along +Y)



RIGHT VIEW
Scale 1:5; looking at the right side (along -X)

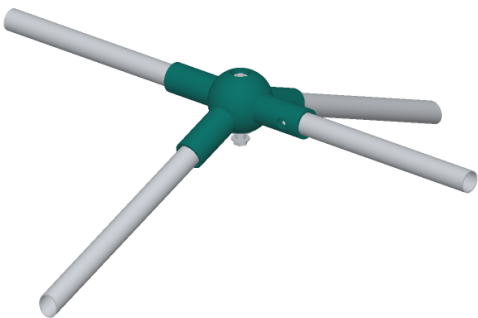

WHERE IT GOES
This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Print 1. As the end ridge node with a fourth socket: two 30.1 mm ridge sockets, one each way along the ridge line.
Bores 65 mm deep to a flat stop, 1.5 mm mouth chamfer, 6 mm button hole 85 mm out in a 16 mm finger recess.
Cable bolt straight down; the four roof cables clip to its ring.
Print on its side with supports; the box is 220 x 219 x 99 mm, so the printer bed must be at least 230 mm.
Check: each ridge tube slides in to the stop with the button pressed, and the ring swings freely on the spacer.

SNAPFRAME			github.com/BoujeeEnjinia1701/snapframe		
SnapFrame ridge node, middle (make 1): making sketch					
DRAWING NO. SNF-DWG-106			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:5	UNITS mm	PROJECTION 	DATE 2026-10-02		DRAWN Amish Chadha
MATERIAL / NOTES Printed in filled PA12-class nylon, about 304 g; M10 cable bolt set					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com			Generated from cad/src; do not edit by hand		