



REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-02	AC

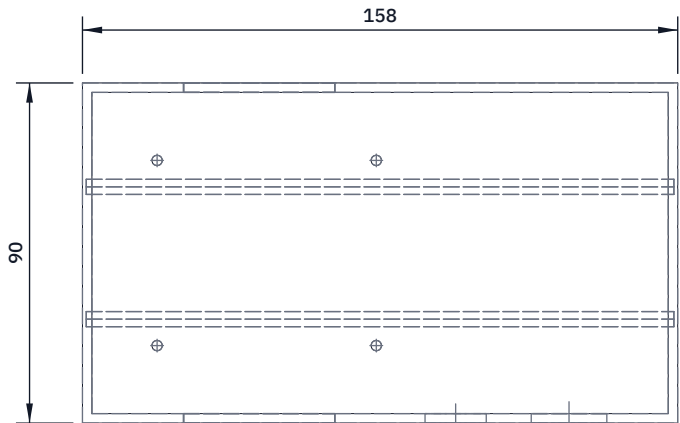


TOP VIEW
Scale 1:2; looking down (along -Z)

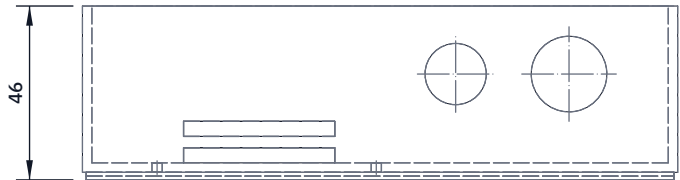

FRONT VIEW
Scale 1:2; looking at the front (along +Y)



RIGHT VIEW
Scale 1:2; looking at the right side (along -X)

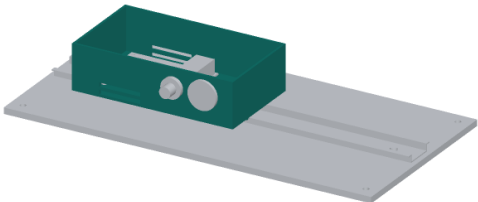

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

The front is the long wall that will face you on the bench; the antenna sits toward the back. Mark the front before cutting.

Vent slots: two slots 40 x 4 mm in each long wall, centred 32 mm left of the middle, 2.5 to 6.5 and 9.5 to 13.5 mm above the outside of the floor. Chain drill 3.5 mm and file to the line.

Front wall, 26 mm above the outside of the floor: a 20 mm hole 50 mm right of the middle (network coupler) and a 16.2 mm hole 20 mm right of the middle (power gland). Step drill, light pressure.

Floor: four 2.7 mm holes for the computer: 58 mm apart along the base and 49 mm apart across it, the left pair 59 mm and the right pair 1 mm left of the middle. Use the maker's bosses if it has them.

Tape the faces first; no solvents; deburr inside and out.

Check: lay the computer on the floor; its holes line up with yours.

TWINKIT		github.com/BoujeeEnjinia1701/twinkit		
TwinKit gateway enclosure base: cutting and drilling sketch				
DRAWING NO. TWK-DWG-103		REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:2	UNITS mm	PROJECTION 	DATE 2026-10-02	DRAWN Amish Chadha
MATERIAL / NOTES Bought 9-module DIN enclosure base, polycarbonate, 157.5 x 90 x 44 mm				
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com			Generated from cad/src; do not edit by hand	