


REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-02	AC




TOP VIEW
Scale 1:2; looking down (along -Z)

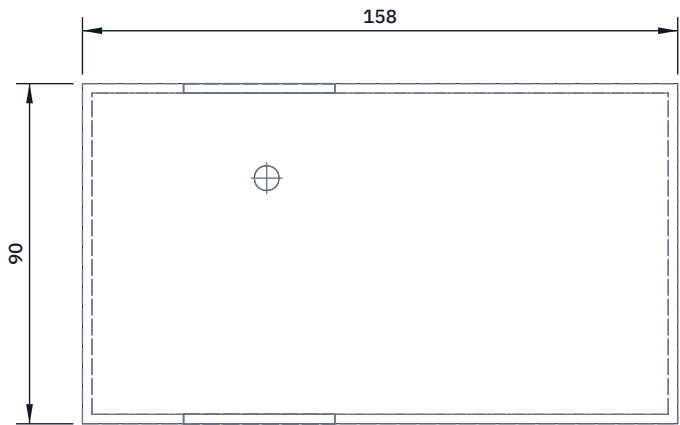

FRONT VIEW
Scale 1:2; looking at the front (along +Y)



RIGHT VIEW
Scale 1:2; looking at the right side (along -X)

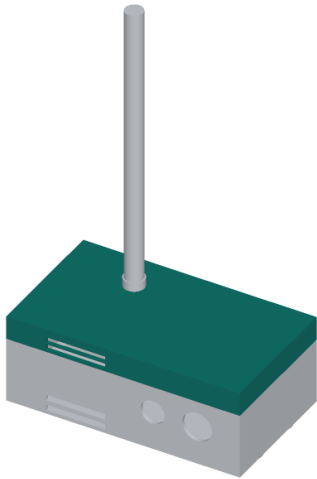

WHERE IT GOES
This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Antenna hole: 6.5 mm through the top, 30 mm left of the middle and 20 mm behind the centre line (toward the back wall).

Pilot 3 mm, then step drill; check the size on the bulkhead's datasheet before the last step.

Vent slots: two slots 40 x 4 mm in each long wall, in line with the base's slots, 1.5 to 5.5 and 6.5 to 10.5 mm above the cover's lower edge. Skip any the maker has already moulded.

Deburr; clean with water and mild soap only.

Fit: the bulkhead goes in from above, flange and washer on the outside, nut inside. The cover then closes onto the base with the maker's clips or screws.

Check: the bulkhead nut clears the concentrator HAT by 20 mm when the cover is closed.

TWINKIT			github.com/BoujeeEnjinia1701/twinkit		
TwinKit gateway enclosure cover: drilling sketch					
DRAWING NO. TWK-DWG-104		REV P1	SHEET 1 of 1		SIZE ANSI B
SCALE 1:2	UNITS mm	PROJECTION 	DATE 2026-10-02		DRAWN Amish Chadha
MATERIAL / NOTES Bought cover for the 9-module enclosure, clear or tinted polycarbonate					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com			Generated from cad/src; do not edit by hand		