



REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-02	AC

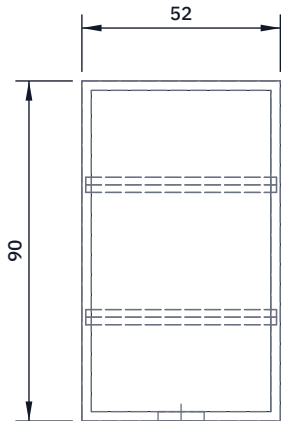


TOP VIEW
Scale 1:2; looking down (along -Z)



FRONT VIEW
Scale 1:2; looking at the front (along +Y)



RIGHT VIEW
Scale 1:2; looking at the right side (along -X)

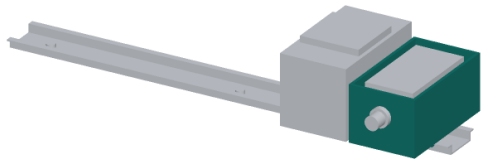

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

One 12.2 mm hole in the front wall, on the middle of the wall, 26 mm above the outside of the floor, for the M12 gland that the pack lead passes through. Pilot 3 mm, then step drill.

Deburr inside and out.

Inside: a hook-and-loop pad 38 x 60 mm stuck to the middle of the floor; its mate goes on the pack's underside.

The pack (38 x 70 x 38 mm at most) lies on the pad, long side front to back, 3.5 mm clear of the gland nut.

Fit: the gland goes in from outside, seal outside, nut inside.

Check: the pack sits on the pad with its lead reaching the gland without strain, and the cover closes without touching it.

TWINKIT				github.com/BoujeeEnjinia1701/twinkit			
TwinKit battery box base: drilling sketch							
DRAWING NO. TWK-DWG-105			REV P1		SHEET 1 of 1		SIZE ANSI B
SCALE 1:2	UNITS mm	PROJECTION 		DATE 2026-10-02		DRAWN Amish Chadha	
MATERIAL / NOTES Bought 3-module DIN enclosure base, polycarbonate, 52.5 x 90 x 44 mm							
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com						Generated from cad/src; do not edit by hand	