BUILD PLAN SKETCH, PLAN NOT YET BUILT

WaterWatch · github.com/BoujeeEnjinia1701/waterwatch

REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-02	AC
P2	Two 3.4 mm holes for the battery tray screws (WWT-DEC-001 F3)	2026-10-25	AC

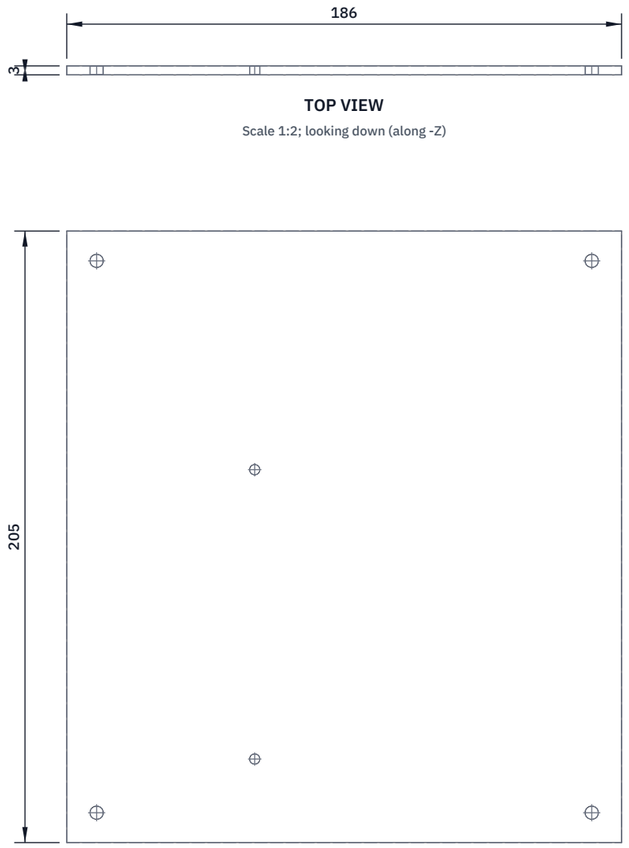

TOP VIEW

Scale 1:2; looking down (along -Z)

FRONT VIEW

Scale 1:2; looking at the front (along +Y)

RIGHT VIEW

Scale 1:2; looking at the right side (along -X)

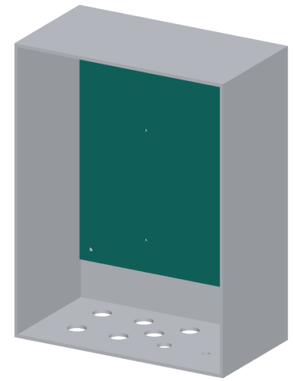

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Print flat, 186 wide x 205 tall x 3 mm, ASA, enclosed printer.
Four 4.5 mm holes 10 in from each side and from top and bottom
(166 x 185 apart) to match the box's four moulded bosses.
Measure your box's bosses first and move the holes to suit.
Lay out on the front face, measured from the left and bottom edges:
battery tray 8 to 88 across, 18 to 148 up; two 3.4 mm holes at 63
across, 28 and 125 up, for its M3 x 8 screws and nuts;
modem 18 to 88 across, 150 to 205 up;
controller 93 to 183 across, 45 to 165 up.
Mark each board's holes through the board; drill 3.2 mm for M3
screws on 6 mm nylon standoffs.
Fit: four M4 screws into the bosses; the plate sits 6 off the back
wall and 37 above the floor, clear of the gland nuts.
Check: flat within 0.5 mm; drops in and lifts out without force.

WATERWATCH

github.com/BoujeeEnjinia1701/waterwatch

WaterWatch internal plate: making sketch

DRAWING NO.	REV	SHEET	SIZE
WWT-DWG-103	P2	1 of 1	ANSI B

SCALE	UNITS	PROJECTION	DATE	DRAWN
1:2	mm		2026-10-25	Amish Chadha

MATERIAL / NOTES

ASA, 3D printed flat, 100 % infill, 186 x 205 x 3 mm

Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com

Generated from cad/src; do not edit by hand