3. Upload the firmware

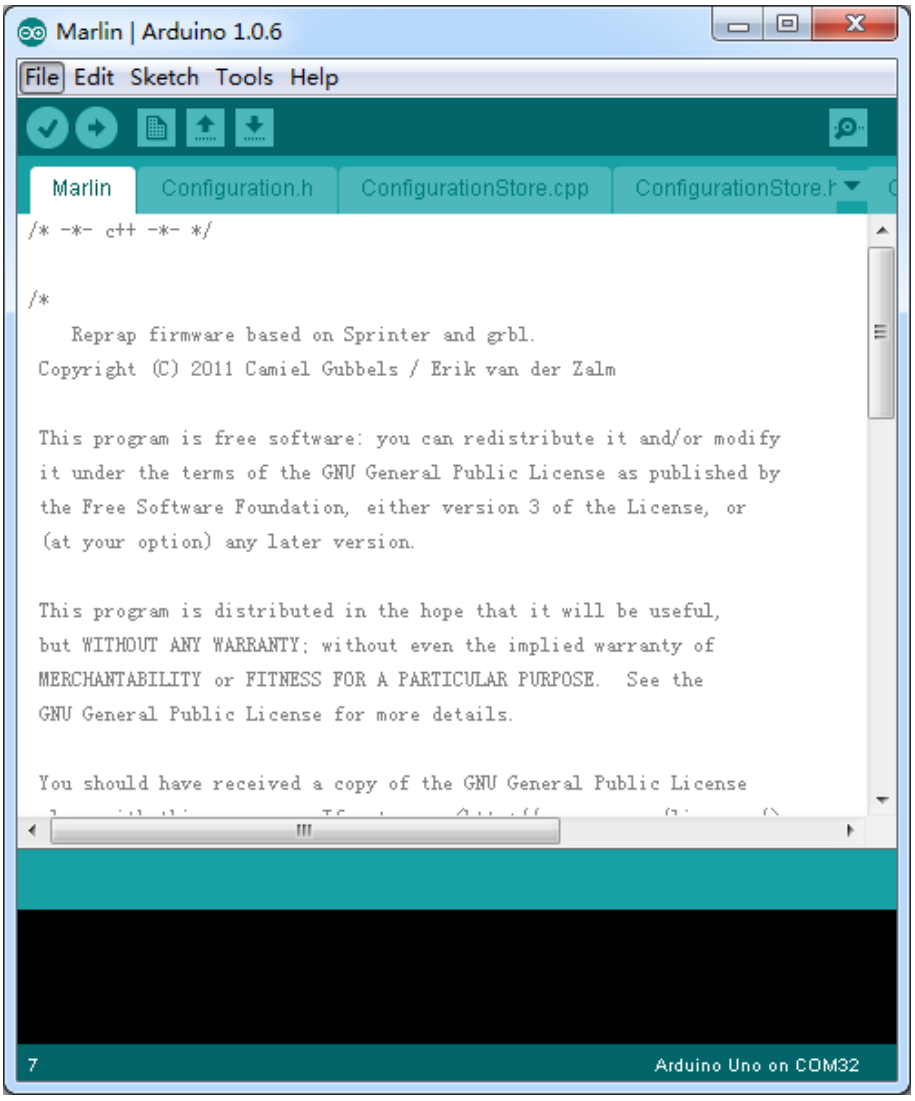

Content

3.1 Install Arduino IDE.....3

3.2 Install Arduino Drivers 3

3.3 Open the Marlin example 4

3.4 Select your board->Arduino Mega 2560 or Mega ADK.....5

3.5 Select your serial port 5

3.6 Upload the program 6

3.1 Install Arduino IDE

Please download the Arduino software from Arduino official website and install it. (Download the version according your computer system)
http://arduino.cc/en/Main/Software

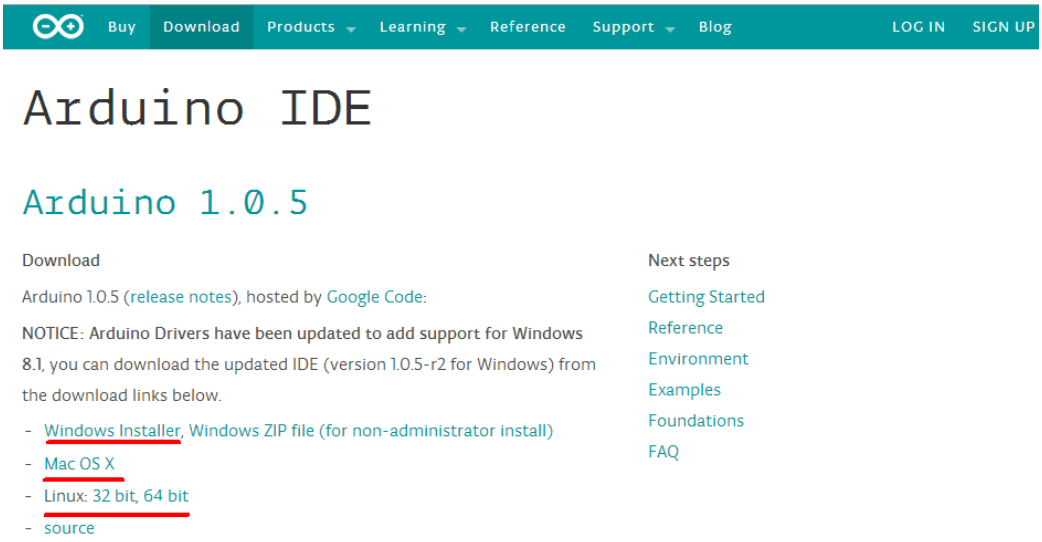

3.2 Install Arduino Drivers

More details http://learn.makeblock.cc/driver_installation/, You can find Window driver CH3415SER in folder Makeblock 3D Printer.

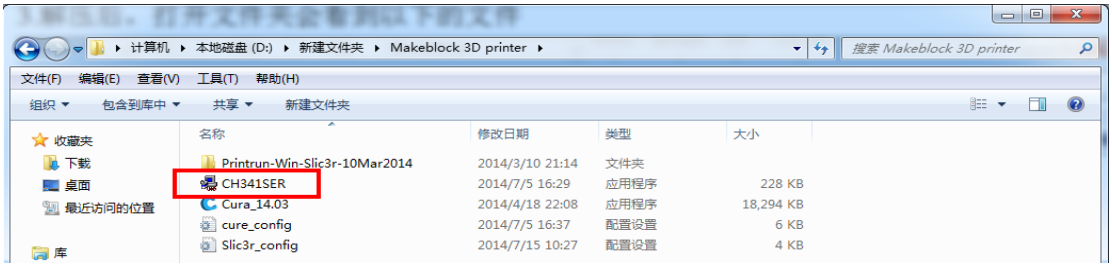

double click the file "CH3415SER" and click “Install” button as the below picture

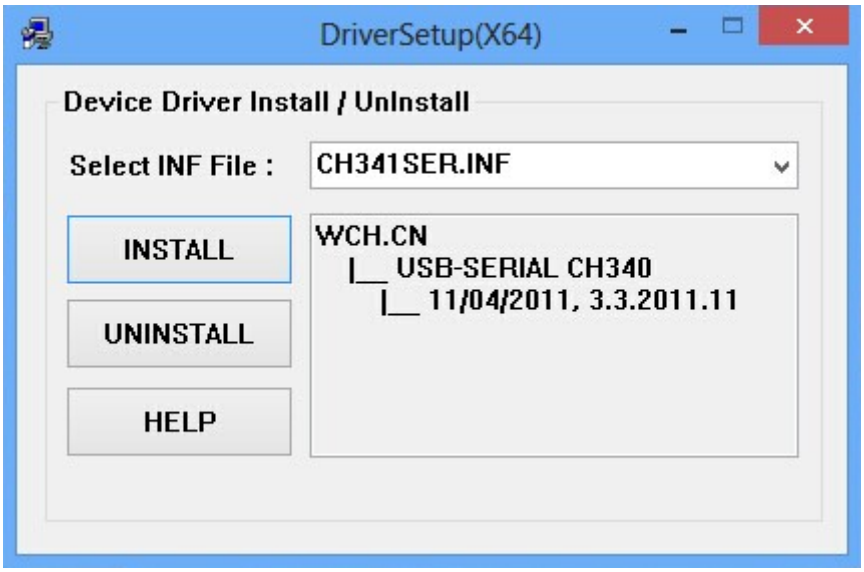

After seconds, the following window will popup the successful installation message, then click the “Confirm” button.

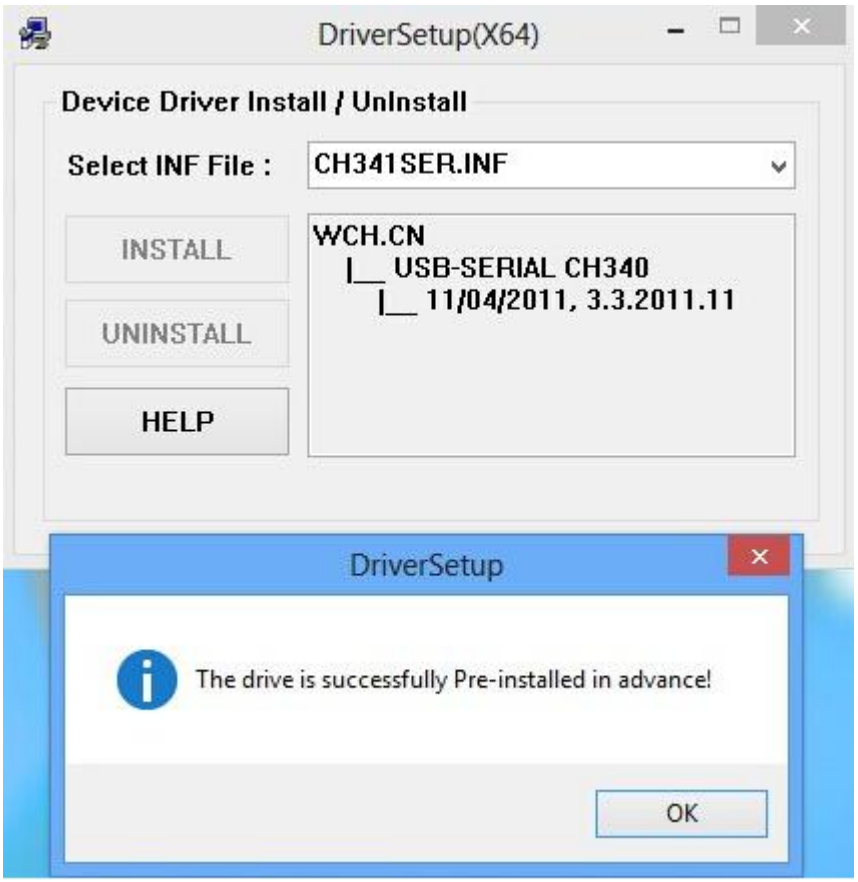

3.3 Open the Marlin example

Navigate: Makeblock 3D printer->Marlin.ino

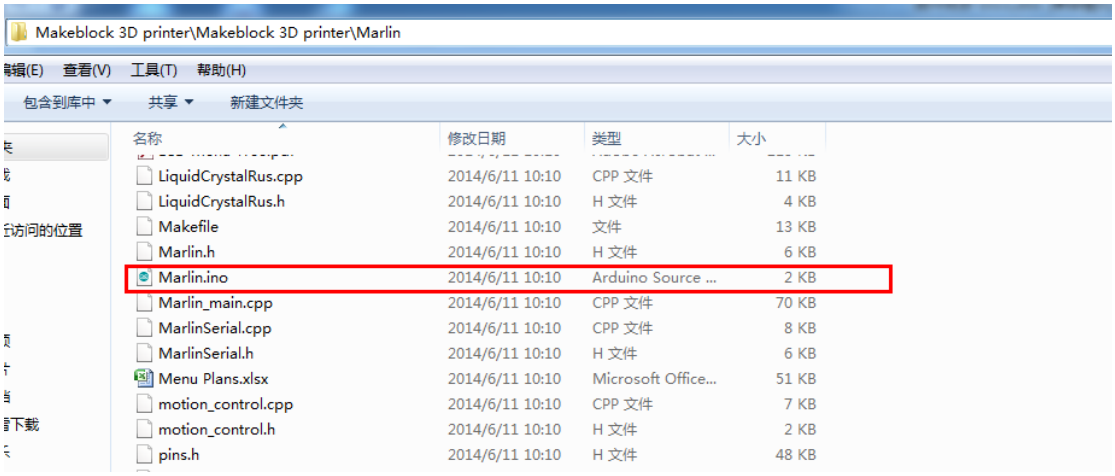

3.4 Select your board->Arduino Mega 2560 or Mega ADK

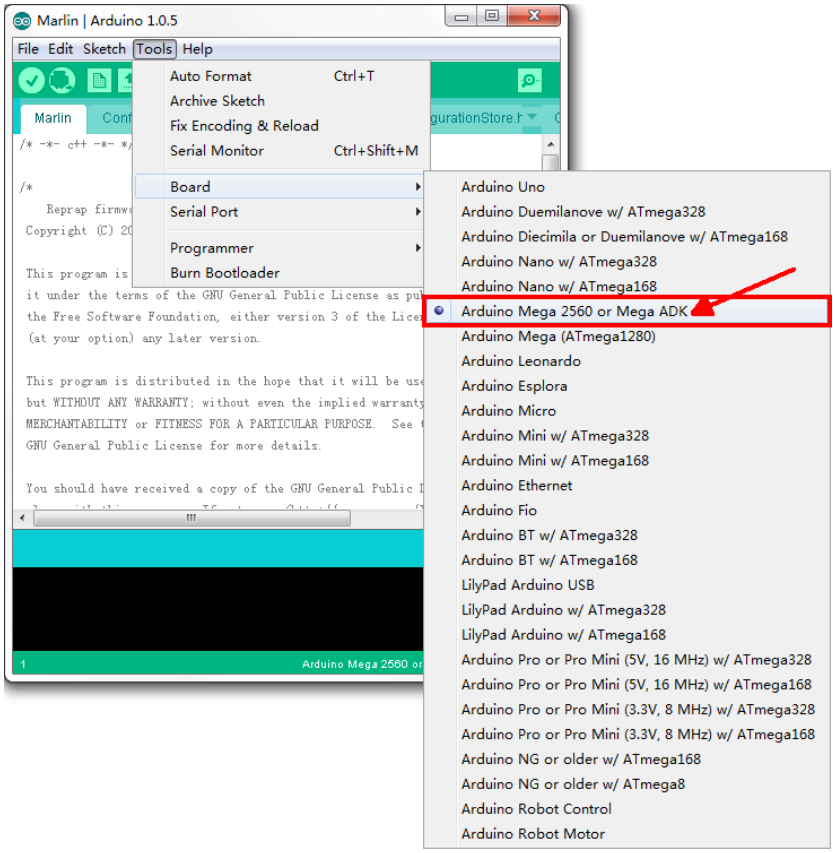

3.5 Select your serial port

Select the serial device of the Arduino board from the Tools | Serial Port menu. This

is likely to be COM3 or higher (COM1and COM2 are usually reserved for hardware serial ports). To find out, you can disconnect your Arduino board and re-open the menu; the entry that disappears should be the Arduino board. Reconnect the board and select that serial port.

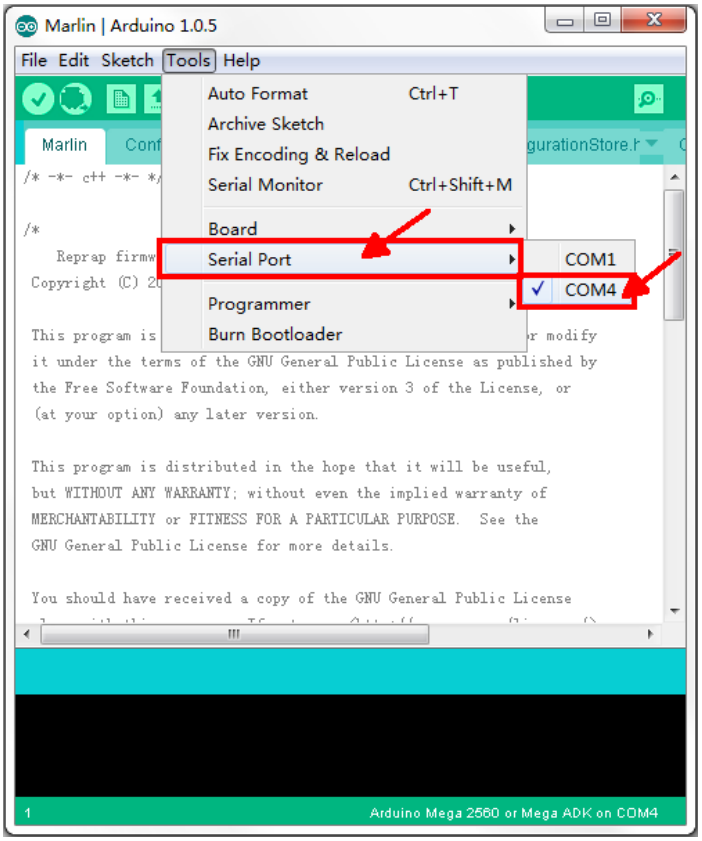

3.6 Upload the program

Now, simply click the "Upload" button in the environment. Wait a few seconds - you should see the RX and TX leds on the board flashing. If the upload is successful, the message "Done uploading." will appear in the status bar.

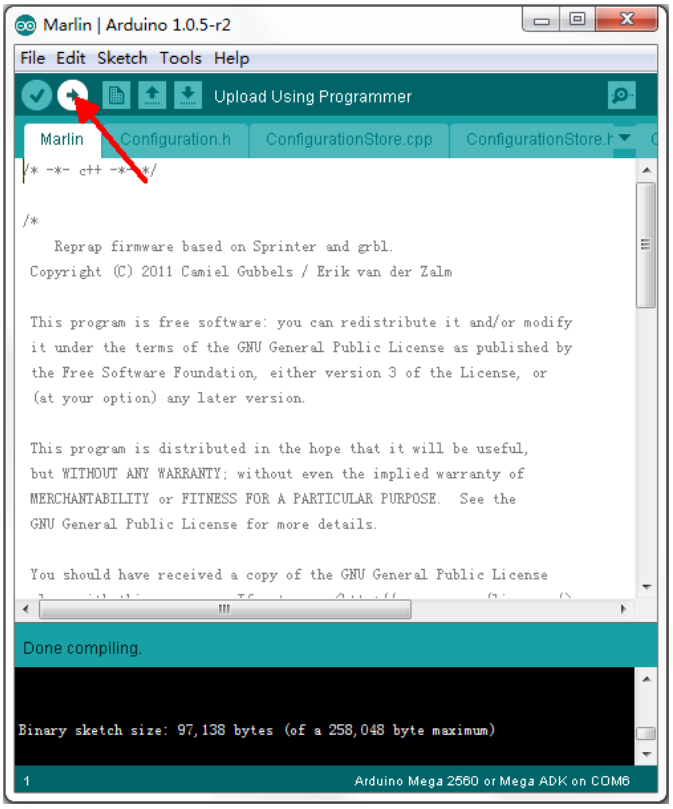
Marlin | Arduino 1.0.5-r2
File Edit Sketch Tools Help
Upload Using Programmer
Marlin
Configuration.h
ConfigurationStore.cpp
/* -*- c++ -*- */
/*
Reprap firmware based on Sprinter and grbl.
Copyright (C) 2011 Camiel Gubbels / Erik van der Zalm
This program is free software: you can redistribute it and/or modify
it under the terms of the GNU General Public License as published by
the Free Software Foundation, either version 3 of the License, or
(at your option) any later version.
This program is distributed in the hope that it will be useful,
but WITHOUT ANY WARRANTY; without even the implied warranty of
MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the
GNU General Public License for more details.
You should have received a copy of the GNU General Public License
Done compiling.
Binary sketch size: 97,138 bytes (of a 258,048 byte maximum)
1
Arduino Mega 2560 or Mega ADK on COM6

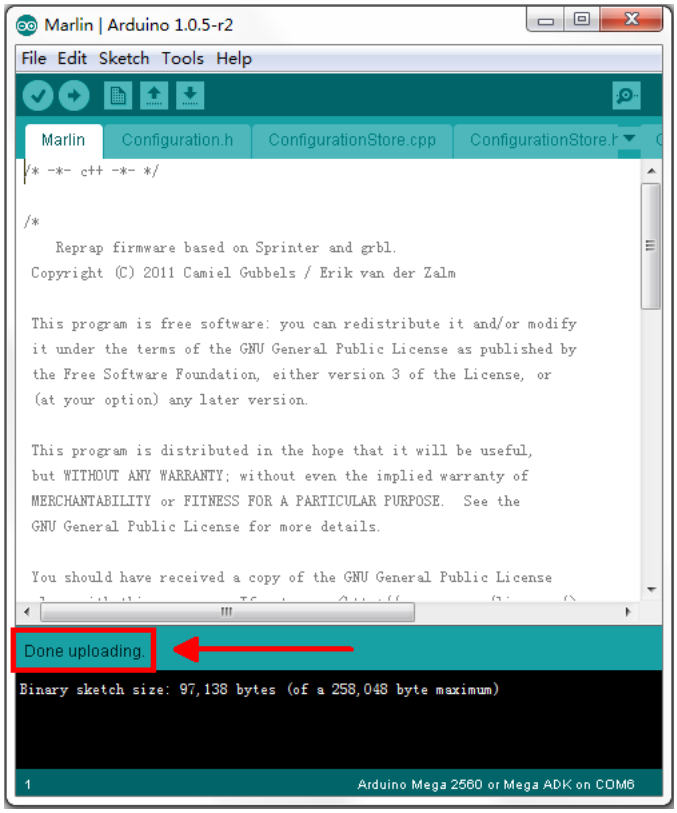
Marlin | Arduino 1.0.5-r2
File Edit Sketch Tools Help
Marlin
Configuration.h
ConfigurationStore.cpp
/* -*- c++ -*- */
/*
Reprap firmware based on Sprinter and grbl.
Copyright (C) 2011 Camiel Gubbels / Erik van der Zalm
This program is free software: you can redistribute it and/or modify
it under the terms of the GNU General Public License as published by
the Free Software Foundation, either version 3 of the License, or
(at your option) any later version.
This program is distributed in the hope that it will be useful,
but WITHOUT ANY WARRANTY; without even the implied warranty of
MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the
GNU General Public License for more details.
You should have received a copy of the GNU General Public License
Done uploading.
Binary sketch size: 97,138 bytes (of a 258,048 byte maximum)
1
Arduino Mega 2560 or Mega ADK on COM6