

# Reference-Assisted Phase Retrieval for Holographic MIMO Reception: Unique Channel and Finite-Alphabet Symbol Recovery

**Abstract**—This paper develops a reference-assisted phase-retrieval framework for holographic MIMO reception from intensity-only measurements, jointly addressing continuous channel sensing and finite-alphabet data recovery from intensity-only measurements. A controllable RF reference is superimposed element-wise with the incident field before square-law detection, breaking the global-phase invariance without coherent I/Q acquisition. For the resulting affine intensity model, we establish an exact secant identity and derive Jacobian-based identifiability and stability conditions for continuous channel parameters. For finite-alphabet signaling, we show that noiseless symbol recovery is unique if and only if the minimum energy-domain distance is positive, and derive corresponding pairwise-error and stability bounds. A spatial four-phase reference code yields an average separation guarantee and reveals that severe reference-signal energy imbalance weakens phase information. Guided by these results, a two-stage receiver combines linearized intensity-domain initialization, stability-guided adaptive training, damped Gauss–Newton channel estimation, and distance-certified Gerchberg–Saxton symbol detection. Simulations verify the theoretical conditions and show that, at 10 dB, the adaptive policy uses 20.0 pilot symbols on average instead of the fixed budget of 40 while attaining  $-28.1$  dB channel NMSE; the proposed distance metric also predicts finite-alphabet detection reliability.

**Index Terms**—Holographic MIMO, reference-assisted phase retrieval, channel identifiability, finite-alphabet symbol recovery, intensity-only measurements.

## I. INTRODUCTION

Reconfigurable intelligent surfaces (RISs) provide a programmable electromagnetic interface for controlling wireless propagation with low-complexity surface elements. Their operating principles, communication models, and potential gains in coverage and energy efficiency have been extensively studied [1]–[9]. Beyond conventional reflecting architectures, densely sampled large intelligent and holographic surfaces can act as spatially continuous apertures, offering high spatial resolution and new wave-domain processing capabilities [10]–[13]. Recent studies have further explored holography-inspired surface control, wave-domain DOA estimation, and metasurface-enabled sensing and localization [14]–[18]; wavenumber-domain processing provides a complementary framework for modeling and processing quasi-continuous holographic apertures [19].

A central implementation challenge is that acquiring the complex field at every surface element conventionally requires coherent radio-frequency chains, local-oscillator distribution, and in-phase/quadrature sampling. Power-detector-based architectures instead retain only intensity measurements and can substantially simplify the receiving hardware [20], [21]. Square-law or direct detection is well established in optical

and infrared communication systems [22], [23]; when used for complex-valued radio signals, however, it discards the phase that carries essential channel and symbol information. The resulting inverse problem is therefore a form of phase retrieval.

Phase retrieval has a long history in optics and signal processing [24], [25]. Convex lifting and semidefinite relaxations provide recovery guarantees at the cost of high-dimensional optimization [26]–[28], whereas alternating-minimization and gradient-based methods offer more scalable nonconvex alternatives [29], [30]. Recent deep-unfolding approaches further combine interpretable iterative structure with learned signal priors [31]. In parallel, fundamental results have characterized the number and structure of measurements required for uniqueness and stable recovery [32]–[36]. These results clarify the generic phaseless inverse problem, but its unavoidable global-phase ambiguity remains incompatible with the direct recovery of absolute communication symbols.

A known reference wave can remove this ambiguity by interfering with the unknown field before square-law detection. This principle originates from holography, where the object and reference waves form an intensity pattern that encodes their relative phase [37], [38]; controlled reference phases can provide additional complex-field information [39]. Algebraically, the reference converts homogeneous magnitude measurements into affine magnitude measurements, connecting the receiver considered here to affine phase retrieval [40]. Unlike a conventional coherent local oscillator used after antenna combining, the reference in this architecture participates directly in the element-wise interference pattern.

Phaseless recovery has also been investigated in communication problems such as OFDM channel estimation [41]. For holographic interference surfaces, prior work has exploited the spatial sum-of-exponentials structure to enable phase-shifting interference suppression and Prony-based multi-user channel segmentation [21]. A subsequent wideband extension further introduced holographic channel inversion together with maximum-likelihood and low-complexity sensing algorithms [42]. As is typical for Prony-type estimators, the robustness of such methods under a finite aperture is closely related to the conditioning of the associated pole-recovery and Vandermonde systems, particularly when the spatial frequencies of different users are closely spaced. Meanwhile, RIS channel acquisition and codebook design have been extensively studied under conventional complex-baseband observation models [43]–[45]. These studies provide effective channel-sensing and training mechanisms, but they do not characterize the finite-measurement injectivity and stability of the complete affine-intensity mapping, nor do they address the identifiability of

finite-alphabet symbols. In particular, generic recovery guarantees for continuous-valued signals do not directly reveal when two distinct constellation vectors may produce identical or nearly indistinguishable energy patterns under the joint effects of the reference wave, waveform sampling, and the holographic array manifold.

This paper addresses that gap through a unified reference-assisted phase-retrieval framework for RF holographic reception. We first separate field-domain injectivity from reference-induced intensity separation and derive conditions under which finite-alphabet symbols are uniquely represented by the observed energies. We then introduce an energy-domain minimum-distance metric that quantifies noise robustness and exposes the joint roles of reference coding and spatial sampling. Finally, we develop practical channel-estimation and symbol-detection algorithms whose performance can be interpreted through these identifiability and separation properties.

The main contributions of this paper are summarized as follows:

- We establish a reference-assisted RF holographic receiver model, in which complex-valued communication symbols are recovered from intensity-only measurements through interference between the unknown field and a spatially coded reference wave.
- We derive discrete identifiability conditions for reference-assisted phase retrieval over finite constellations and reveal the joint impact of the reference wave, the pulse-shaping matrix, and the receiving-surface array manifold on symbol uniqueness.
- We introduce an energy-domain minimum distance metric to characterize the stability of symbol recovery and to guide reference-wave and spatial-measurement design.
- We develop and compare maximum-likelihood and low-complexity phase-retrieval detectors, demonstrating that proper spatial reference coding improves symbol distinguishability and detection performance.

## II. SYSTEM MODEL

We consider an RF holographic receiver in which  $L$  single-antenna users transmit complex baseband symbols to a surface composed of multiple receiving units. Each unit senses the intensity of the interference pattern formed by the incident field and a known reference derived from a common local oscillator [21], [46]. Unlike a conventional passive RIS, the surface is an active receiving front end: the reference is routed to the detector inputs rather than used to configure electromagnetic reflection. The receiver first estimates the complex channel parameters and directions of arrival (DOAs) and then uses the resulting channel estimate to recover the transmitted symbols.

The scheduled users are assumed to share a common symbol period and to be frame- and symbol-time aligned at the receiver using conventional uplink synchronization procedures, including pilot- or preamble-aided timing acquisition followed by network-controlled ranging or timing adjustment [47], [48]. After synchronization, residual user-dependent timing offsets

are assumed small enough that their effects on the subslot-integrated measurements can be neglected. Residual carrier-frequency offsets are likewise assumed sufficiently small for the received complex fields to remain approximately invariant over one detection interval. Users that do not satisfy these timing conditions, such as asynchronous random-access users with unknown relative delays, are outside the scope of the present model.

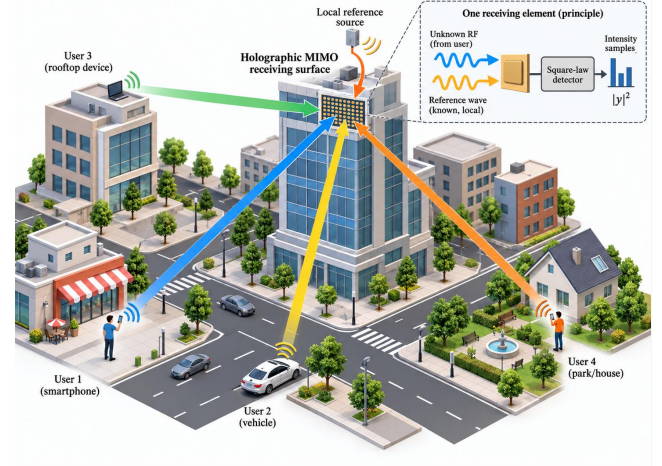


Fig. 1. Illustration of the proposed multi-user reference-assisted RF holographic reception architecture with intensity-only measurements.

### A. Transmitter Model

The  $K$  symbols transmitted by user  $l$  in one signaling block are collected in  $\mathbf{s}_l = [s_{l,0}, \dots, s_{l,K-1}]^T \in \mathcal{S}^K$ , where  $\mathcal{S} = \{c_0, \dots, c_{M_{\text{mod}}-1}\} \subset \mathbb{C}$  is an equiprobable constellation normalized to  $\frac{1}{M_{\text{mod}}} \sum_{q=0}^{M_{\text{mod}}-1} |c_q|^2 = \mathbb{E}\{|s_{l,k}|^2\} = 1$ . After pulse shaping, the complex baseband waveform is

$$x_l(t) = \sqrt{P_l} \sum_{k=0}^{K-1} s_{l,k} p(t - kT_s), \quad (1)$$

Here,  $P_l$  is the transmit power,  $p(t)$  is the pulse-shaping filter, and  $T_s$  is the symbol duration. The corresponding real passband waveform radiated by user  $l$  is

$$x_l^{\text{RF}}(t) = \sqrt{2} \text{Re}\{x_l(t) e^{j2\pi f_c t}\}, \quad (2)$$

where  $f_c$  is the carrier frequency. Under the usual carrier-period averaging, the factor  $\sqrt{2}$  makes the average power of  $x_l^{\text{RF}}(t)$  equal to the envelope power  $|x_l(t)|^2$ . Thus,  $x_l(t)$  contains the pulse-shaped amplitude and phase information, while the carrier term translates that waveform to RF for propagation.

### B. Far-Field Channel Model

The RF holographic receiving surface is modeled as an  $N_y \times N_z$  uniform planar array (UPA) with a total of  $N_r = N_y N_z$  receiving elements. Without loss of generality, the array is assumed to lie on the  $yz$ -plane, with its geometric center located at the origin. The inter-element spacings along the  $y$ - and  $z$ -axes are denoted by  $d_y$  and  $d_z$ , respectively.

Accordingly, the position vector of the  $(n, m)$ -th receiving element is

$$\mathbf{r}_{n,m} = [0, y_n, z_m]^T, \quad (3)$$

where  $y_n = \left(n - \frac{N_y+1}{2}\right) d_y$ ,  $n = 1, \dots, N_y$ , and  $z_m = \left(m - \frac{N_z+1}{2}\right) d_z$ ,  $m = 1, \dots, N_z$ . This centered coordinate convention is adopted throughout the paper for the subsequent far-field array-response modeling. The centered coordinates introduce no loss of generality because a change of origin produces only a user-dependent phase that can be absorbed into the complex gain.

Under far-field propagation, user  $l$  produces a plane wave with polar angle  $\theta_l$  measured from the array broadside and azimuth angle  $\phi_l$  measured from the positive  $y$ -axis in the  $yz$ -plane. With  $k_0 = 2\pi/\lambda$ , the relevant tangential wavenumbers are  $k_{l,y} = k_0 \sin \theta_l \cos \phi_l$  and  $k_{l,z} = k_0 \sin \theta_l \sin \phi_l$ . The phase at element  $(n, m)$  is

$$\psi_{n,m}^{(l)} = \mathbf{k}_l^T \mathbf{r}_{n,m} = k_{l,y} y_n + k_{l,z} z_m. \quad (4)$$

The far-field amplitude is taken as constant across the aperture, while path loss, shadowing, propagation phase, and the residual constant carrier-phase offset relative to the receiver reference are absorbed into  $\alpha_l \in \mathbb{C}$ . Accordingly,

$$\mathbf{h}_l = \alpha_l \mathbf{v}_l, \quad [\mathbf{v}_l]_{\iota(n,m)} = e^{j\psi_{n,m}^{(l)}}, \quad (5)$$

where  $\iota(n, m) = (n-1)N_z + m$ . Collecting all users gives

$$\mathbf{H} = [\mathbf{h}_1, \dots, \mathbf{h}_L] = \underbrace{[\mathbf{v}_1, \dots, \mathbf{v}_L]}_{\mathbf{V}} \underbrace{\text{diag}(\alpha_1, \dots, \alpha_L)}_{\mathbf{R}} = \mathbf{V}\mathbf{R}, \quad (6)$$

which separates the directional array response from the complex path gains. The single dominant far-field path per scheduled user is adopted to expose the DOA-dependent parametric structure targeted by the estimator. More general wideband or multipath fields remain compatible with the affine intensity observation model, but require an expanded channel parametrization and are not considered here.

### C. Reference-Assisted Holographic Reception Model

The element-wise reference signals are derived from a common local oscillator operating at  $f_c$  and distributed across the surface through a power-divider, RF feed lines, and prescribed phase-delay sections [21], [46]. Thus, all reference branches share the same carrier and maintain stable relative phases over each detection interval. Fixed amplitude and phase offsets introduced by the distribution network are assumed to be calibrated and included in the prescribed reference coefficients. Let  $\mathbf{x}(t) = [x_1(t), \dots, x_L(t)]^T$ . At receiving unit  $i$ , the resulting reference is

$$b_i^{\text{RF}}(t) = \sqrt{2} \text{Re}\{b_i e^{j2\pi f_c t}\}, \quad b_i = \rho_i e^{j\chi_i}, \quad (7)$$

where  $\rho_i$  and  $\chi_i$  are its prescribed amplitude and phase. Let  $\mathbf{b} = [b_1, \dots, b_{N_r}]^T$  collect the reference coefficients. In the spatial four-phase implementation, distinct receiving units are assigned  $\chi_i \in \{0, \pi/2, \pi, 3\pi/2\}$  and operate simultaneously. Hence, the four phases form a calibrated spatial code across the aperture; they are not four sequential observations of the same field coordinate and incur no additional symbol intervals.

Under the narrowband model, the received user field has envelope  $[\mathbf{H}\mathbf{x}(t)]_i$ . Its superposition with (7) gives

$$r_i^{\text{RF}}(t) = \sqrt{2} \text{Re}\{([\mathbf{H}\mathbf{x}(t)]_i + b_i) e^{j2\pi f_c t}\}. \quad (8)$$

Here,  $\mathbf{H}\mathbf{x}(t)$  contains the propagation response and unknown user phases, whereas  $b_i$  is receiver controlled. The reference-assisted interference is therefore formed in the analog RF domain before square-law detection and sampling.

Each symbol may be observed over  $M$  temporal subslots of duration  $\Delta_t = T_s/M$ , with centers  $t_{k,m} = kT_s + (m + 1/2)\Delta_t$  and intervals  $\mathcal{I}_{k,m} = [kT_s + m\Delta_t, kT_s + (m+1)\Delta_t]$ . Direct square-law detection and integration are applied to the RF waveform in (8). For compactness, denote its composite complex envelope by  $u_i(t) \triangleq [\mathbf{H}\mathbf{x}(t)]_i + b_i$ . Then

$$\begin{aligned} z_i[k, m] &= \frac{1}{\Delta_t} \int_{\mathcal{I}_{k,m}} [r_i^{\text{RF}}(\tau)]^2 d\tau + w_i[k, m] \\ &= \frac{1}{\Delta_t} \int_{\mathcal{I}_{k,m}} |u_i(\tau)|^2 d\tau \\ &\quad + \frac{1}{\Delta_t} \text{Re}\left\{ \int_{\mathcal{I}_{k,m}} u_i^2(\tau) e^{j4\pi f_c \tau} d\tau \right\} + w_i[k, m] \\ &\simeq \frac{1}{\Delta_t} \int_{\mathcal{I}_{k,m}} |u_i(\tau)|^2 d\tau + w_i[k, m]. \end{aligned} \quad (9)$$

Thermal and front-end noise physically perturb the incident RF field before square-law detection. After integration and calibration of the mean noise floor, its centered contribution appears at the detector output together with detector and readout imperfections. These aggregate effects are represented by  $w_i[k, m]$ , rather than by separate noise terms before and after detection. Since each subslot averages many RF noise samples,  $w_i[k, m]$  is approximated below as independent zero-mean Gaussian noise with constant variance, yielding a tractable effective intensity-domain model. An exact pre-detection complex Gaussian model instead produces signal-dependent noncentral chi-squared observations and is not pursued here. The second equality follows from  $[\sqrt{2} \text{Re}\{u_i(\tau) e^{j2\pi f_c \tau}\}]^2 = |u_i(\tau)|^2 + \text{Re}\{u_i^2(\tau) e^{j4\pi f_c \tau}\}$ . Because  $u_i(t)$  varies on the envelope time scale, the oscillatory  $2f_c$  term averages out when  $\Delta_t f_c \gg 1$ , yielding the last line. Importantly, the retained envelope energy satisfies  $|u_i(t)|^2 = |[\mathbf{H}\mathbf{x}(t)]_i|^2 + |b_i|^2 + 2 \text{Re}\{b_i^* [\mathbf{H}\mathbf{x}(t)]_i\}$ ; hence, integration removes the carrier-frequency oscillation but preserves the array and symbol phases through their interference with the known reference. Equation (9) is therefore an analytical representation of the measured RF energy, not coherent downconversion or I/Q sampling. If the envelope is approximately constant within a subslot, stacking the  $N_r$  element outputs yields

$$\mathbf{z}[k, m] = |\mathbf{H}\mathbf{x}[k, m] + \mathbf{b}|^2 + \mathbf{w}[k, m] \in \mathbb{R}^{N_r}, \quad (10)$$

where  $\mathbf{x}[k, m] = \mathbf{x}(t_{k,m})$  and the squared modulus is element-wise. The  $MN_r$  samples associated with each symbol are retained as a vector. Spatial diversity is supplied by the receiving units and their reference phases, whereas  $M > 1$  is used only when temporal envelope samples are needed; it is not the number of reference phases.

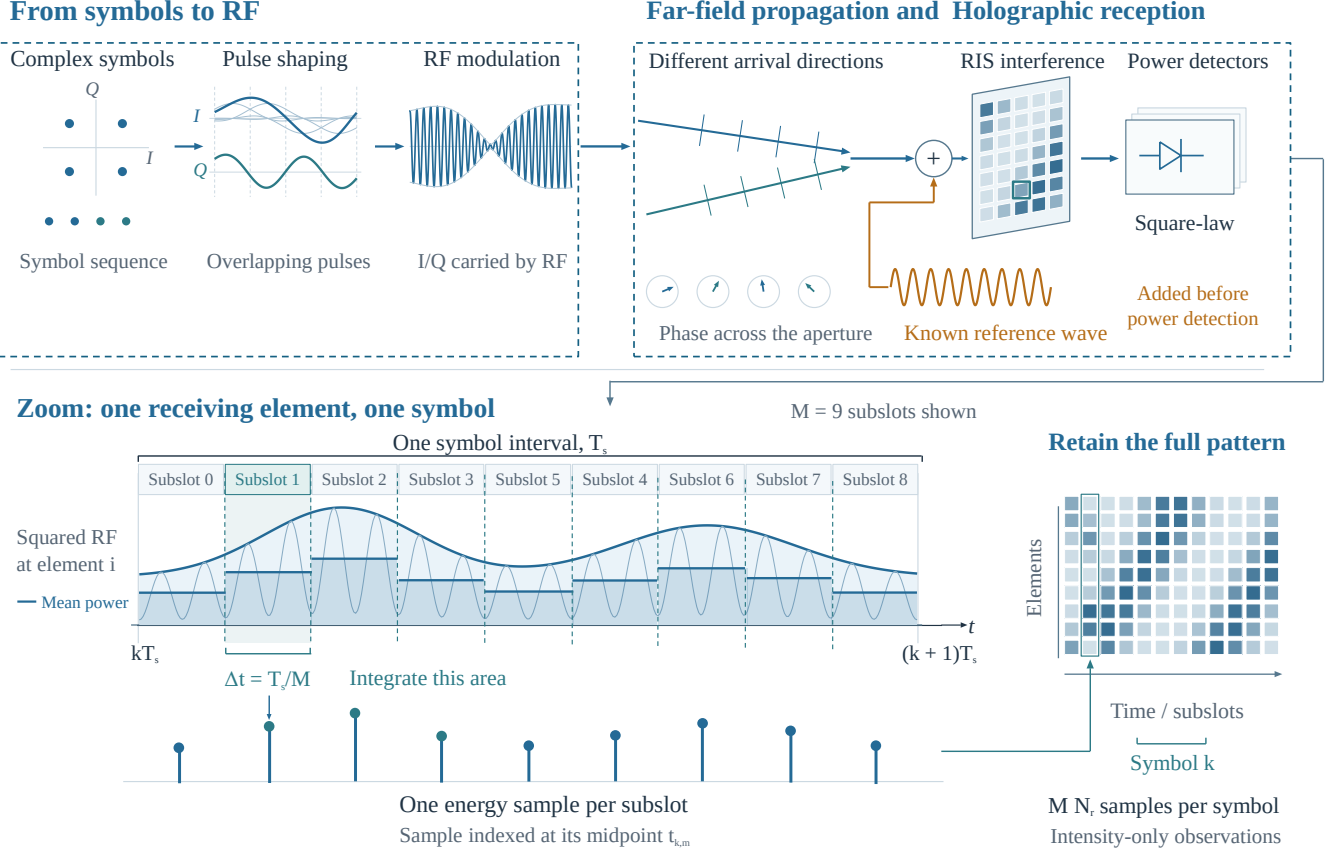


Fig. 2. Reference-assisted holographic reception model. Finite-alphabet symbols are pulse-shaped and upconverted to RF signals. After far-field propagation, the incident fields from different users form direction-dependent phase patterns across the holographic aperture. A known reference wave is added at the RF front end before square-law detection, converting relative phase information into intensity variations. When waveform variation within a symbol must be resolved, the symbol interval is divided into  $M$  subslots; otherwise,  $M = 1$ . The receiver preserves the resulting spatial intensity pattern for channel estimation and symbol detection.

To relate these energy samples to the transmitted symbols, define  $\mathbf{D}_P = \text{diag}(\sqrt{P_1}, \dots, \sqrt{P_L})$ ,  $[\mathbf{P}]_{kM+m,j} = p(t_{k,m} - jT_s)$ , and stack  $\mathbf{s} = [\mathbf{s}_1^T, \dots, \mathbf{s}_L^T]^T$ . The matrix  $\mathbf{P}_{\text{tx}} \triangleq \mathbf{D}_P \otimes \mathbf{P} \in \mathbb{C}^{LKM \times LK}$  maps  $\mathbf{s}$  to the sampled user envelopes, where  $\otimes$  denotes the Kronecker product.

For general pulse shaping, neighboring symbols may overlap, so the  $KMN_r$  measurements must be processed jointly. Let  $\Pi$  reorder the user-major envelope  $\mathbf{P}_{\text{tx}}\mathbf{s}$  into time-major form. Stacking (10) over all subslots then yields the compact block-level model

$$\mathbf{z} = |\mathbf{G}\mathbf{s} + \mathbf{b}_{\text{eq}}|^2 + \mathbf{w}, \quad (11)$$

where  $\mathbf{G} \triangleq (\mathbf{I}_{KM} \otimes \mathbf{H})\Pi\mathbf{P}_{\text{tx}} \in \mathbb{C}^{KMN_r \times LK}$  and  $\mathbf{b}_{\text{eq}} \triangleq \mathbf{1}_{KM} \otimes \mathbf{b}$ . Thus,  $\mathbf{s} \in \mathcal{S}^{LK}$  and  $\mathbf{z}, \mathbf{w} \in \mathbb{R}^{KMN_r}$ . When intersymbol overlap is negligible, (11) separates into symbol-wise models; otherwise, it describes joint block detection.

#### D. Two-Phase Transmission Protocol and Unified Observation Model

The receiver uses a training phase to estimate the channel from known pilots and a data phase to detect finite-alphabet symbols using the estimated channel. Both phases follow (11), but their unknowns have different structures.

1) *Training Phase*: Let  $\mathbf{x}_p[t] \in \mathbb{C}^L$  be the known waveform in pilot subslot  $t = 0, \dots, T_p - 1$ , and define  $\mathbf{h} = \text{vec}(\mathbf{H})$ . Stacking the element-wise observations and using  $\mathbf{H}\mathbf{x}_p[t] = (\mathbf{x}_p^T[t] \otimes \mathbf{I}_{N_r})\mathbf{h}$  gives

$$\mathbf{z}_p = |\mathbf{G}_p\mathbf{h} + \mathbf{b}_p|^2 + \mathbf{w}_p, \quad (12)$$

where  $\mathbf{G}_p$  stacks  $\mathbf{x}_p^T[t] \otimes \mathbf{I}_{N_r}$ , and  $\mathbf{b}_p$  and  $\mathbf{w}_p$  stack the reference and noise. For the fixed spatial code considered here,  $\mathbf{b}_p$  repeats the same calibrated  $N_r$ -entry phase map at every pilot time. The far-field structure in (6) will later reduce the unknown from the full vector  $\mathbf{h}$  to the DOAs and complex path gains.

2) *Data Transmission Phase*: For a data block of  $K_d$  symbols per user, let  $\mathbf{s}_d \in \mathcal{S}^{LK_d}$  denote the stacked symbol vector. Denote the true noiseless response by  $\mu_d(\mathbf{s}; \mathbf{H}) \triangleq |\mathbf{G}_d(\mathbf{H})\mathbf{s} + \mathbf{b}_d|^2$ . Using  $\hat{\mathbf{H}}$ , the receiver forms the detection template  $\hat{\mu}_d(\mathbf{s}) \triangleq |\mathbf{G}_d(\hat{\mathbf{H}})\mathbf{s} + \hat{\mathbf{b}}_d|^2$ . The actual observation can therefore be written as

$$\mathbf{z}_d = \hat{\mu}_d(\mathbf{s}_d) + \mathbf{e}_{\text{CSI}}(\mathbf{s}_d) + \mathbf{w}_d, \quad (13)$$

where  $\mathbf{e}_{\text{CSI}}(\mathbf{s}) \triangleq \mu_d(\mathbf{s}; \mathbf{H}) - \hat{\mu}_d(\mathbf{s})$  is the generally symbol-dependent CSI-mismatch error and vanishes for perfect CSI. Here,  $Q_d = N_rMK_d$ , and  $\hat{\mathbf{b}}_d = \mathbf{b}_d$  is the calibrated receiver

reference. Thus, the training and data phases share the same affine intensity structure, but the latter performs finite-alphabet detection with an estimated observation map.

### III. UNIQUENESS AND STABILITY OF REFERENCE-ASSISTED ENERGY DETECTION

Reliable recovery from intensity-only measurements requires more than the existence of a solution: distinct channels or symbol vectors must produce distinct energy observations, and small measurement perturbations must not cause arbitrarily large reconstruction errors. These requirements are captured by uniqueness and stability, respectively, and are fundamental to determining whether the reference wave and spatial sampling provide sufficient information. Exploiting the quadratic structure of the reference-assisted energy mapping, we establish an exact secant-based uniqueness condition and derive lower and upper Lipschitz bounds that quantify robustness. The resulting framework applies to both continuous channel estimation and finite-alphabet symbol detection.

#### A. Unified Affine Phase-Retrieval Model

The training- and data-phase observations derived in Section II share the form

$$\mathbf{z} = \mathcal{T}_{\mathbf{G},\mathbf{b}}(\boldsymbol{\theta}) + \mathbf{w}, \quad \mathcal{T}_{\mathbf{G},\mathbf{b}}(\boldsymbol{\theta}) \triangleq |\mathbf{G}\boldsymbol{\theta} + \mathbf{b}|^2, \quad (14)$$

where  $Q$  is the total number of scalar intensity observations,  $D$  is the complex dimension of the unknown vector,  $\mathbf{G} \in \mathbb{C}^{Q \times D}$ ,  $\boldsymbol{\theta} \in \mathcal{X} \subseteq \mathbb{C}^D$ ,  $\mathbf{b} \in \mathbb{C}^Q$ , and  $\mathbf{z}, \mathbf{w} \in \mathbb{R}^Q$ . Here,  $\mathcal{X}$  denotes the feasible set of the unknown parameter, and the modulus and square are applied element-wise. This is an affine phase-retrieval model [40]. For full-channel estimation in the training phase,  $\boldsymbol{\theta} = \mathbf{h} = \text{vec}(\mathbf{H})$ ,  $Q = N_r T_p$ , and  $D = N_r L$ . If the channel is represented by a lower-dimensional linear complex parameter,  $D$  is replaced by the dimension of that parameter. In the data phase,  $\boldsymbol{\theta} = \mathbf{s}_d \in \mathcal{S}^{LK_d}$ ,  $Q = Q_d$ , and  $D = LK_d$ .

The reference changes the ambiguity class fundamentally. If  $\mathbf{b} = 0$ ,  $\mathcal{T}_{\mathbf{G},0}(e^{j\varphi}\boldsymbol{\theta}) = \mathcal{T}_{\mathbf{G},0}(\boldsymbol{\theta})$ , so uniqueness is defined only modulo a global phase. If  $\mathbf{b} \neq 0$ , the expansion

$$\mathcal{T}_{\mathbf{G},\mathbf{b}}(\boldsymbol{\theta}) = |\mathbf{G}\boldsymbol{\theta}|^2 + |\mathbf{b}|^2 + 2 \text{Re}\{\mathbf{b}^* \odot \mathbf{G}\boldsymbol{\theta}\} \quad (15)$$

contains phase-sensitive interference, so absolute uniqueness on  $\mathcal{X}$  becomes possible. A nonzero reference is not sufficient by itself, however: its phases must probe every feasible field difference in nondegenerate real directions.

For  $\boldsymbol{\theta} \in \mathbb{C}^D$ , define the realification  $\boldsymbol{\theta}_{\mathbb{R}} = [\text{Re}\{\boldsymbol{\theta}\}^T, \text{Im}\{\boldsymbol{\theta}\}^T]^T \in \mathbb{R}^{2D}$ . For two distinct parameters, define the energy-domain distance

$$d_E(\boldsymbol{\theta}_1, \boldsymbol{\theta}_2) \triangleq \|\mathcal{T}_{\mathbf{G},\mathbf{b}}(\boldsymbol{\theta}_1) - \mathcal{T}_{\mathbf{G},\mathbf{b}}(\boldsymbol{\theta}_2)\|_2. \quad (16)$$

The optimal lower and upper stability bounds on  $\mathcal{X}$  are

$$\alpha_{\mathcal{X}} \triangleq \inf_{\substack{\boldsymbol{\theta}_1, \boldsymbol{\theta}_2 \in \mathcal{X} \\ \boldsymbol{\theta}_1 \neq \boldsymbol{\theta}_2}} \frac{d_E(\boldsymbol{\theta}_1, \boldsymbol{\theta}_2)}{\|\boldsymbol{\theta}_1 - \boldsymbol{\theta}_2\|_2}, \quad (17)$$

$$\beta_{\mathcal{X}} \triangleq \sup_{\substack{\boldsymbol{\theta}_1, \boldsymbol{\theta}_2 \in \mathcal{X} \\ \boldsymbol{\theta}_1 \neq \boldsymbol{\theta}_2}} \frac{d_E(\boldsymbol{\theta}_1, \boldsymbol{\theta}_2)}{\|\boldsymbol{\theta}_1 - \boldsymbol{\theta}_2\|_2}. \quad (18)$$

Thus, the inverse problem is globally stable on  $\mathcal{X}$  if  $0 < \alpha_{\mathcal{X}} \leq \beta_{\mathcal{X}} < \infty$ . The lower bound is the important one: it excludes pairs that are far apart in parameter space but arbitrarily close in energy space.

#### B. Exact Secant Identity and Global Uniqueness

The quadratic structure of (14) gives an exact identity, which is stronger than a first-order approximation. For a point  $\boldsymbol{\theta} \in \mathbb{C}^D$ , define the real Jacobian

$$\mathbf{J}(\boldsymbol{\theta}) \triangleq 2[\text{Re}\{\text{diag}[(\mathbf{G}\boldsymbol{\theta} + \mathbf{b})^*]\mathbf{G}\}, \\ -\text{Im}\{\text{diag}[(\mathbf{G}\boldsymbol{\theta} + \mathbf{b})^*]\mathbf{G}\}] \in \mathbb{R}^{Q \times 2D}. \quad (19)$$

**Theorem 1** (Exact secant identity and pairwise uniqueness). *For any  $\boldsymbol{\theta}_1, \boldsymbol{\theta}_2 \in \mathbb{C}^D$ , let  $\boldsymbol{\mu} = (\boldsymbol{\theta}_1 + \boldsymbol{\theta}_2)/2$  and  $\boldsymbol{\delta} = \boldsymbol{\theta}_1 - \boldsymbol{\theta}_2$ . Then*

$$\mathcal{T}_{\mathbf{G},\mathbf{b}}(\boldsymbol{\theta}_1) - \mathcal{T}_{\mathbf{G},\mathbf{b}}(\boldsymbol{\theta}_2) = \mathbf{J}(\boldsymbol{\mu})\boldsymbol{\delta}_{\mathbb{R}}. \quad (20)$$

*Consequently, the mapping  $\mathcal{T}_{\mathbf{G},\mathbf{b}}$  is injective on  $\mathcal{X}$  if and only if, for every distinct  $\boldsymbol{\theta}_1, \boldsymbol{\theta}_2 \in \mathcal{X}$ ,*

$$\mathbf{J}\left(\frac{\boldsymbol{\theta}_1 + \boldsymbol{\theta}_2}{2}\right)(\boldsymbol{\theta}_1 - \boldsymbol{\theta}_2)_{\mathbb{R}} \neq \mathbf{0}. \quad (21)$$

*Proof.* Applying  $|a|^2 - |c|^2 = \text{Re}\{(a+c)^*(a-c)\}$  element-wise gives  $\text{Re}\{[\mathbf{G}(\boldsymbol{\theta}_1 + \boldsymbol{\theta}_2) + 2\mathbf{b}]^* \odot \mathbf{G}(\boldsymbol{\theta}_1 - \boldsymbol{\theta}_2)\}$ , which equals (20) after realification. Hence, two feasible points have identical intensity observations exactly when the right-hand side of (20) vanishes. Excluding this possibility for every distinct pair is therefore equivalent to injectivity on  $\mathcal{X}$ , proving (21).  $\square$

For a full-dimensional continuous set,  $\text{rank}(\mathbf{G}) = D$  is necessary but not sufficient: a nonzero field difference can still vanish after the reference-dependent real projection. A sharper conclusion is available for finite hypotheses.

**Corollary 1** (Generic-reference uniqueness for finite hypotheses). *Let  $\Xi = \{\xi_1, \dots, \xi_M\}$  be finite, with pre-reference field codewords  $\mathbf{u}_i = \mathbf{f}(\xi_i) \in \mathbb{C}^Q$ . For  $i \neq j$ , set  $\mathbf{d}_{ij} = \mathbf{u}_i - \mathbf{u}_j$  and  $\mathbf{a}_{ij} = (|\mathbf{u}_i|^2 - |\mathbf{u}_j|^2)/2$ . A pair with  $\mathbf{d}_{ij} = \mathbf{0}$  is indistinguishable for every reference; otherwise, its ambiguous references form the proper real affine set*

$$\mathcal{B}_{ij}^{\text{bad}} = \{\mathbf{b} \in \mathbb{C}^Q : \text{Re}\{\mathbf{b}^* \odot \mathbf{d}_{ij}\} = -\mathbf{a}_{ij}\}. \quad (22)$$

*If all field codewords are distinct, the finite union  $\bigcup_{i < j} \mathcal{B}_{ij}^{\text{bad}}$  has measure zero in  $\mathbb{C}^Q$ ; hence, an absolutely continuously distributed reference makes  $|\mathbf{u}_i + \mathbf{b}|^2$  pairwise distinct with probability one.*

*Proof.* For two hypotheses in the affine field model, let  $\boldsymbol{\mu}_{ij} = (\boldsymbol{\theta}_i + \boldsymbol{\theta}_j)/2$  and  $\boldsymbol{\delta}_{ij} = \boldsymbol{\theta}_i - \boldsymbol{\theta}_j$ , so that  $\mathbf{u}_i = \mathbf{G}\boldsymbol{\theta}_i$ ,  $\mathbf{u}_j = \mathbf{G}\boldsymbol{\theta}_j$ , and  $\mathbf{d}_{ij} = \mathbf{G}\boldsymbol{\delta}_{ij}$ . Expanding the Jacobian-secant product in (21) gives

$$\begin{aligned} & \mathbf{J}(\boldsymbol{\mu}_{ij})(\boldsymbol{\delta}_{ij})_{\mathbb{R}} \\ &= 2 \text{Re}\left\{\left(\frac{\mathbf{u}_i + \mathbf{u}_j}{2} + \mathbf{b}\right)^* \odot (\mathbf{u}_i - \mathbf{u}_j)\right\} \\ &= \text{Re}\{(\mathbf{u}_i + \mathbf{u}_j)^* \odot \mathbf{d}_{ij}\} + 2 \text{Re}\{\mathbf{b}^* \odot \mathbf{d}_{ij}\} \\ &= |\mathbf{u}_i|^2 - |\mathbf{u}_j|^2 + 2 \text{Re}\{\mathbf{b}^* \odot \mathbf{d}_{ij}\} \\ &= 2(\mathbf{a}_{ij} + \text{Re}\{\mathbf{b}^* \odot \mathbf{d}_{ij}\}). \end{aligned}$$

The cross terms in the third line cancel after taking the real part. Hence, the pair is ambiguous precisely when  $\text{Re}\{\mathbf{b}^* \odot \mathbf{d}_{ij}\} = -\mathbf{a}_{ij}$ , which proves (22). This final identity depends only on the two field codewords and therefore also holds for a general finite mapping  $\mathbf{f}$ .

If  $d_{ij,q} = 0$ , then  $u_{i,q} = u_{j,q}$  and  $a_{ij,q} = 0$ , so that coordinate imposes no restriction. If  $d_{ij,q} \neq 0$ , all ambiguous reference values are

$$b_q = \left( -\frac{a_{ij,q}}{|d_{ij,q}|^2} + j\tau_q \right) d_{ij,q}, \quad \tau_q \in \mathbb{R},$$

which is one real affine constraint in  $\mathbb{C}$ . Therefore, if  $r_{ij} = |\{q : d_{ij,q} \neq 0\}| \geq 1$ , then  $\mathcal{B}_{ij}^{\text{bad}}$  has real dimension  $2Q - r_{ij} < 2Q$  and hence Lebesgue measure zero. A finite union of such sets remains measure zero, establishing the almost-sure uniqueness claim.  $\square$

For  $b_q = \rho_q e^{j\chi_q}$ , an active coordinate is ambiguous only when  $\rho_q |d_{ij,q}| \cos(\angle d_{ij,q} - \chi_q) = -a_{ij,q}$ , which excludes at most two phases. Continuous phases are therefore ambiguity-free almost surely when the reference support meets every field difference. This almost-sure statement relies on continuous phase variation and does not extend directly to a fixed or spatially coupled finite-phase code, which must instead be checked using (22) or its actual minimum distance. For  $\mathbf{f}(\boldsymbol{\theta}) = \mathbf{G}\boldsymbol{\theta}$ , the premise reduces to  $\mathbf{G}(\boldsymbol{\theta}_i - \boldsymbol{\theta}_j) \neq \mathbf{0}$ . Full column rank is sufficient but unnecessary on a finite set, while a difference already annihilated by  $\mathbf{G}$  cannot be restored by any reference. The result also applies to  $\mathbf{u}_i = \mathbf{g}_p(\boldsymbol{\eta}_i)$  on a finite angular grid when its nuisance parameters are fixed or discretized; continuous gains require the parametric analysis below.

Generic injectivity on a finite set does not by itself ensure a useful noise margin. Returning to a general feasible set, let  $\mathcal{M}_{\mathcal{X}} = \{(\boldsymbol{\theta}_1 + \boldsymbol{\theta}_2)/2 : \boldsymbol{\theta}_1, \boldsymbol{\theta}_2 \in \mathcal{X}\}$  be the midpoint set. The exact identity yields computable two-sided bounds.

**Theorem 2** (Jacobian stability bounds). *Define*

$$\underline{\sigma}_J \triangleq \inf_{\boldsymbol{\mu} \in \mathcal{M}_{\mathcal{X}}} \sigma_{\min}(\mathbf{J}(\boldsymbol{\mu})), \quad \bar{\sigma}_J \triangleq \sup_{\boldsymbol{\mu} \in \mathcal{M}_{\mathcal{X}}} \sigma_{\max}(\mathbf{J}(\boldsymbol{\mu})). \quad (23)$$

Then

$$\underline{\sigma}_J \|\boldsymbol{\theta}_1 - \boldsymbol{\theta}_2\|_2 \leq d_E(\boldsymbol{\theta}_1, \boldsymbol{\theta}_2) \leq \bar{\sigma}_J \|\boldsymbol{\theta}_1 - \boldsymbol{\theta}_2\|_2 \quad (24)$$

for all pairs in  $\mathcal{X}$ . Consequently,  $\alpha_{\mathcal{X}} \geq \underline{\sigma}_J$  and  $\beta_{\mathcal{X}} \leq \bar{\sigma}_J$ .

*Proof.* Apply the singular-value inequalities to (20) over the midpoint set.  $\square$

The bound  $\underline{\sigma}_J > 0$  is a convenient sufficient condition for global stability, but it can be conservative because it tests every direction at every midpoint, including directions that may not connect two feasible points. The exact constant in (17), or equivalently the restricted secants in (20), is the sharp criterion.

The stability constants also depend on the balance between the received field and the reference wave. To make this dependence explicit, let  $u_q(\boldsymbol{\theta}) = [\mathbf{G}\boldsymbol{\theta}]_q$  and, whenever  $u_q(\boldsymbol{\theta}) \neq 0$ ,

define the per-measurement reference-to-signal energy ratio and the corresponding normalized interference depth as

$$\gamma_q(\boldsymbol{\theta}) \triangleq \frac{|b_q|^2}{|u_q(\boldsymbol{\theta})|^2}, \quad \kappa_q(\boldsymbol{\theta}) \triangleq \frac{2\sqrt{\gamma_q(\boldsymbol{\theta})}}{1 + \gamma_q(\boldsymbol{\theta})}. \quad (25)$$

Writing  $\Delta\phi_q = \angle u_q - \angle b_q$ , the  $q$ th noiseless measurement becomes

$$[\mathcal{T}_{\mathbf{G}, \mathbf{b}}(\boldsymbol{\theta})]_q = (|u_q|^2 + |b_q|^2) [1 + \kappa_q(\boldsymbol{\theta}) \cos(\Delta\phi_q)]. \quad (26)$$

Here  $0 \leq \kappa_q \leq 1$ , with its maximum attained when the two incident fields have equal energy. It approaches zero when either field dominates, showing that the phase-sensitive interference then occupies only a small fraction of the detected energy.

More directly, consider the global-phase perturbation  $e^{j\varphi}\boldsymbol{\theta}$ . Its tangent direction satisfies

$$\begin{aligned} \mathbf{J}(\boldsymbol{\theta})(j\boldsymbol{\theta})_{\mathbb{R}} &= -2\text{Im}\{\mathbf{b}^* \odot \mathbf{G}\boldsymbol{\theta}\}, \\ \sigma_{\min}(\mathbf{J}(\boldsymbol{\theta})) &\leq \frac{2\|\text{Im}\{\mathbf{b}^* \odot \mathbf{G}\boldsymbol{\theta}\}\|_2}{\|\boldsymbol{\theta}\|_2}. \end{aligned} \quad (27)$$

Equation (27) shows that a vanishing reference restores the global-phase ambiguity, while energy balance alone is insufficient because phase-aligned samples remain insensitive. Reference strength and phase diversity must therefore be designed jointly and assessed through  $\underline{\sigma}_J$ . These bounds are understood on the bounded gain-and-power region of interest: affine phase retrievability is bi-Lipschitz on compact feasible sets, but not uniformly so over the entire unbounded space [40, Theorem 4.1, Proposition 4.1].

### C. Parametric Channel Uniqueness Requirements

The affine phase-retrieval result in [40, Theorem 3.1] states that a mapping on  $\mathbb{C}^D$  is globally injective if and only if its real Jacobian has rank  $2D$  at every point. For unstructured channel training,  $D_h = N_r L$ ,  $Q_p = N_r T_p$ , and the unknown is  $\mathbf{h} = \text{vec}(\mathbf{H}) \in \mathbb{C}^{D_h}$ . The universal minimum-measurement result in [40, Theorem 3.2] therefore gives the necessary condition

$$Q_p = N_r T_p \geq 3D_h = 3N_r L \implies T_p \geq 3L. \quad (28)$$

This bound concerns global recovery over the entire space  $\mathbb{C}^{N_r L}$ ; hence, increasing  $N_r$  does not reduce the required number of pilot subslots because it increases the number of unknown channel coefficients by the same factor. A generic unconstrained affine measurement pair is sufficient when  $Q_p \geq 4D_h - 1$  [40, Theorem 3.4]. This generic result is only a benchmark here, however, because  $\mathbf{G}_p = \mathbf{X}_p \otimes \mathbf{I}_{N_r}$  has a structured Kronecker form.

The far-field model reduces the channel to a real parameter manifold. Let  $d_a$  be the number of angular parameters per user and define  $p = (d_a + 2)L$ , where the additional two parameters are the real and imaginary parts of each path gain. With  $\mathbf{h}_{\mathbb{R}}(\boldsymbol{\eta}) \triangleq [\text{Re}\{\mathbf{h}(\boldsymbol{\eta})\}^T, \text{Im}\{\mathbf{h}(\boldsymbol{\eta})\}^T]^T$  and  $\mathbf{H}_{\boldsymbol{\eta}} \triangleq \partial \mathbf{h}_{\mathbb{R}} / \partial \boldsymbol{\eta}^T$ , the chain rule gives the parameter-domain Jacobian

$$\mathbf{J}_{\boldsymbol{\eta}}(\boldsymbol{\eta}) = \mathbf{J}_h(\mathbf{h}(\boldsymbol{\eta})) \mathbf{H}_{\boldsymbol{\eta}}(\boldsymbol{\eta}) \in \mathbb{R}^{Q_p \times p}, \quad (29)$$

where  $\mathbf{J}_h$  is (19) evaluated with  $\mathbf{G} = \mathbf{G}_p$  and  $\mathbf{b} = \mathbf{b}_p$ . If each of the  $K_p$  pilot symbols is observed over  $M$  subslots, then  $T_p = MK_p$ .

**Corollary 2** (Parametric training count). *At an interior regular point, a differentiable local inverse requires*

$$\text{rank}(\mathbf{J}_\eta(\boldsymbol{\eta})) = p. \quad (30)$$

*Conversely, this rank condition makes the training map a local embedding. Consequently, a necessary measurement count is*

$$\begin{aligned} N_r T_p &= N_r M K_p \geq (d_a + 2)L, \\ K_p &\geq \left\lceil \frac{(d_a + 2)L}{M N_r} \right\rceil. \end{aligned} \quad (31)$$

*Thus, the right-hand side is  $4L$  for the planar-array model with two angles per user,  $3L$  for a linear-array model with one angle, and  $2L$  when the DOAs are known and only the complex gains are estimated.*

*Proof.* A differentiable local inverse requires an injective differential, whereas full column rank in (30) makes the training map a local embedding by the constant-rank theorem. Since  $\text{rank}(\mathbf{J}_\eta) \leq \min\{N_r M K_p, p\}$ , the stated counts follow from  $p = (d_a + 2)L$ .  $\square$

The count in (31) is necessary but not sufficient. Full rank additionally requires nonzero path gains, a two-dimensional array aperture for two-dimensional DOA estimation, an array geometry without angular aliasing, pilots that preserve all tangent directions, and reference phases that do not annihilate those directions after the real projection in (19). More receiving units can therefore trade for fewer temporal measurements only under the far-field parameterization, whose dimension remains  $4L$ . Finally, (30) is a local condition; global parameter uniqueness also requires the pairwise condition (21) on the channel manifold, together with an ambiguity-free angular region and, for unlabeled paths, a fixed ordering convention.

Within an identifiable neighborhood, the smallest singular value gives the local inverse sensitivity. With  $\mathcal{T}_p(\boldsymbol{\eta}) \triangleq |\mathbf{G}_p \mathbf{h}(\boldsymbol{\eta}) + \mathbf{b}_p|^2$ ,

$$\liminf_{\|\boldsymbol{\delta}\|_2 \rightarrow 0} \frac{\|\mathcal{T}_p(\boldsymbol{\eta} + \boldsymbol{\delta}) - \mathcal{T}_p(\boldsymbol{\eta})\|_2}{\|\boldsymbol{\delta}\|_2} = \sigma_{\min}(\mathbf{J}_\eta(\boldsymbol{\eta})). \quad (32)$$

Thus, the rank condition establishes local uniqueness, whereas the magnitude of  $\sigma_{\min}(\mathbf{J}_\eta)$  determines how strongly noise is amplified.

For the unstructured model,  $\mathbf{G}_p = \mathbf{X}_p \otimes \mathbf{I}_{N_r}$ , so  $\text{rank}(\mathbf{G}_p) = N_r \text{rank}(\mathbf{X}_p)$  and  $\sigma_{\min}(\mathbf{G}_p) = \sigma_{\min}(\mathbf{X}_p)$ . The resulting necessary hierarchy is

$$\begin{aligned} T_p &\geq L && \text{for complex-field preservation,} \\ T_p &\geq 2L && \text{for regular local intensity recovery,} \\ T_p &\geq 3L && \text{necessary for global recovery.} \end{aligned} \quad (33)$$

In particular,  $T_p \geq 3L$  is only a universal necessary measurement count and does not by itself guarantee global injectivity for the structured pilot-reference map; the latter still requires the all-point Jacobian condition. These counts do not replace the pilot- and reference-diversity requirements. When the DOAs are known, only the  $2L$  real gain parameters remain, giving  $N_r T_p \geq 2L$ ; nevertheless, the stacked matrix  $\text{col}_t\{\mathbf{V} \text{diag}\{\mathbf{x}_p[t]\}\}$  must preserve every gain direction. Closely spaced angles reduce  $\sigma_{\min}(\mathbf{V})$  and hence both the field- and energy-domain stability margins.

#### D. Finite-Alphabet Uniqueness and Noise Margin

For data detection, let  $\mathcal{X}_d = \mathcal{S}^{LK_d}$ . This specializes Corollary 1 to  $\mathbf{u}_i = \mathbf{G}_d \mathbf{s}_i$ . Since the candidate set is finite, noiseless uniqueness is equivalent to a positive minimum separation. Define

$$d_{\min,d}^{(E)} \triangleq \min_{\substack{\mathbf{s}_1, \mathbf{s}_2 \in \mathcal{X}_d \\ \mathbf{s}_1 \neq \mathbf{s}_2}} \|\mathbf{G}_d \mathbf{s}_1 + \mathbf{b}_d\|^2 - \|\mathbf{G}_d \mathbf{s}_2 + \mathbf{b}_d\|^2. \quad (34)$$

**Theorem 3** (Noise-limited finite-alphabet reliability). *For an arbitrary additive perturbation, the nearest-intensity detector returns the transmitted symbol vector whenever*

$$\|\mathbf{w}\|_2 < \frac{d_{\min,d}^{(E)}}{2}. \quad (35)$$

*Under exact CSI and the adopted white Gaussian effective output-noise model,  $\mathbf{w} \sim \mathcal{N}(\mathbf{0}, \sigma_w^2 \mathbf{I})$ , the error probability of the binary ML comparison between distinct candidates  $\mathbf{s}_i$  and  $\mathbf{s}_j$  is*

$$P_{i \rightarrow j} = Q\left(\frac{d_E(\mathbf{s}_i, \mathbf{s}_j)}{2\sigma_w}\right). \quad (36)$$

*Consequently, because the minimum is attained on the finite candidate set,*

$$P_{\text{pair, worst}} \triangleq \max_{i \neq j} P_{i \rightarrow j} = Q\left(\frac{d_{\min,d}^{(E)}}{2\sigma_w}\right). \quad (37)$$

*If  $M_c = |\mathcal{X}_d| = |\mathcal{S}|^{LK_d}$  is the number of candidate symbol vectors, the union bound gives*

$$P_B \leq (M_c - 1)Q\left(\frac{d_{\min,d}^{(E)}}{2\sigma_w}\right). \quad (38)$$

*Using  $Q(x) \leq \frac{1}{2}e^{-x^2/2}$  further yields*

$$P_B \leq \frac{M_c - 1}{2} \exp\left[-\frac{(d_{\min,d}^{(E)})^2}{8\sigma_w^2}\right]. \quad (39)$$

*Proof.* Let  $\boldsymbol{\mu}_k = |\mathbf{G}_d \mathbf{s}_k + \mathbf{b}_d|^2$ . The triangle inequality gives the decoding radius in (35). If  $\mathbf{s}_i$  is transmitted, the binary ML comparison favors  $\mathbf{s}_j$  only if  $\mathbf{w}^T(\boldsymbol{\mu}_j - \boldsymbol{\mu}_i) \geq d_E^2(\mathbf{s}_i, \mathbf{s}_j)/2$ . The left-hand side is Gaussian with variance  $\sigma_w^2 d_E^2(\mathbf{s}_i, \mathbf{s}_j)$ , which gives (36). Taking the closest pair, applying the union bound over the remaining  $M_c - 1$  candidates, and using the standard Gaussian-tail inequality yield the final three bounds.  $\square$

#### E. Spatial Four-Phase Coding and Energy Allocation

The preceding conditions apply to any calibrated reference map. We now examine the parallel hardware architecture in which each spatial coordinate is assigned one of four phases,

$$b_q = \rho_q e^{j\chi_q}, \quad \chi_q \in \{0, \pi/2, \pi, 3\pi/2\}, \quad \rho_q > 0. \quad (40)$$

Unlike temporal phase shifting, the four observations do not correspond to repeated measurements of the same unknown field sample. A useful guarantee is therefore obtained over the ensemble of balanced spatial phase assignments.

**Theorem 4** (Mean separation of a spatial four-phase code). *Let each phase in (40) have a uniform marginal distribution*

over the four states, independently of a fixed pair  $\theta_1, \theta_2$ . Define  $\mathbf{u}_i = \mathbf{G}\theta_i$ ,  $\mathbf{c} = |\mathbf{u}_1|^2 - |\mathbf{u}_2|^2$ , and  $\Delta\mathbf{u} = \mathbf{u}_1 - \mathbf{u}_2$ . Then

$$\mathbb{E}_{\mathbf{X}}[\|\mathcal{T}_b(\theta_1) - \mathcal{T}_b(\theta_2)\|_2^2] = \|\mathbf{c}\|_2^2 + 2 \sum_q \rho_q^2 |\Delta u_q|^2. \quad (41)$$

Consequently, with  $\rho_{\min} = \min_q \rho_q$ ,

$$\mathbb{E}_{\mathbf{X}}[\|\Delta\mu\|_2^2] \geq 2\rho_{\min}^2 \|\mathbf{G}(\theta_1 - \theta_2)\|_2^2. \quad (42)$$

The assumption includes a uniformly randomized balanced assignment, for which the four states occur equally often but the unit phases need not be mutually independent.

*Proof.* For coordinate  $q$ , the intensity difference is  $\Delta\mu_q = c_q + 2\rho_q \text{Re}\{e^{-j\chi_q} \Delta u_q\}$ . The four-state average satisfies  $\mathbb{E}_{\chi_q}[\text{Re}\{e^{-j\chi_q} \Delta u_q\}] = 0$  and  $\mathbb{E}_{\chi_q}[\text{Re}^2\{e^{-j\chi_q} \Delta u_q\}] = |\Delta u_q|^2/2$ . Hence,  $\mathbb{E}_{\chi_q}[\Delta\mu_q^2] = c_q^2 + 2\rho_q^2 |\Delta u_q|^2$ . Summing over the spatial coordinates proves (41), and lower bounding each  $\rho_q$  by  $\rho_{\min}$  gives (42).  $\square$

The theorem shows why balanced spatial phase coding is useful on average, but it is not a deterministic certificate for every realized phase map. A fixed hardware code must still be validated through its actual Jacobian, restricted secant constant, or finite-alphabet minimum distance. The same averaged identity also gives a closed-form energy allocation for each candidate pair.

**Corollary 3** (Pairwise energy allocation under a fixed incident-energy budget). *Under the noise model of Theorem 3, suppose that the candidate fields are  $\mathbf{u}_i = \mathbf{G}_d \mathbf{s}_i$ . Define the average received-field energy and reference energy per measurement as*

$$P_s \triangleq \frac{1}{M_c Q_d} \sum_{i=1}^{M_c} \|\mathbf{u}_i\|_2^2, \quad P_b \triangleq \frac{1}{Q_d} \|\mathbf{b}_d\|_2^2, \quad (43)$$

and let  $P_T = P_s + P_b$ . Writing  $\mathbf{u}_i = \sqrt{P_s} \mathbf{v}_i$  gives  $(M_c Q_d)^{-1} \sum_i \|\mathbf{v}_i\|_2^2 = 1$ . Suppose that  $P_T$  is fixed and the spatial phases are drawn uniformly from the four states in (40), with  $|b_q|^2 = P_b$ . Then

$$\begin{aligned} \mathbb{E}_{\mathbf{X}}[d_{E,ij}^2] &= P_s^2 A_{ij} + 2P_s P_b B_{ij}, \\ A_{ij} &= \|\|\mathbf{v}_i\|^2 - \|\mathbf{v}_j\|^2\|_2^2, \\ B_{ij} &= \|\mathbf{v}_i - \mathbf{v}_j\|_2^2. \end{aligned} \quad (44)$$

For  $0 \leq A_{ij} < B_{ij}$ , this ensemble-mean squared distance is maximized by

$$P_s^* = \frac{B_{ij}}{2B_{ij} - A_{ij}} P_T, \quad \frac{P_b^*}{P_s^*} = 1 - \frac{A_{ij}}{B_{ij}}. \quad (45)$$

In particular, phase-only pairs satisfy  $A_{ij} = 0$  and are optimally separated by  $P_s = P_b = P_T/2$ . Therefore, when the minimum-distance pairs are phase dominated,  $A_{ij} \ll B_{ij}$ , equal signal and reference energies provide a useful nominal operating point rather than a universal optimum. For amplitude-dominated pairs in higher-order QAM,  $A_{ij} \geq B_{ij}$  may instead place the pairwise optimum at the boundary. Moreover, the active minimum-distance pair can change with the power split, so the system-level allocation must be assessed using the actual  $d_{\min,d}^{(E)}$ .

*Proof.* For measurement coordinate  $q$  and reference phase  $\chi_q$ , let  $a_q = |v_{i,q}|^2 - |v_{j,q}|^2$  and  $\delta v_q = v_{i,q} - v_{j,q}$ . The noiseless intensity difference is

$$\Delta\mu_q = P_s a_q + 2\sqrt{P_s P_b} \text{Re}\{e^{-j\chi_q} \delta v_q\}. \quad (46)$$

Taking the four-state expectation cancels the cross term and gives a mean squared projection of  $|\delta v_q|^2/2$ . Summing over  $q$  gives (44). Substituting  $P_b = P_T - P_s$  and differentiating yields (45); its second derivative is negative for  $A_{ij} < B_{ij}$ . When  $A_{ij} = 0$ ,

$$\mathbb{E}_{\mathbf{X}}[d_{E,ij}^2] = 2B_{ij} P_s (P_T - P_s) \leq \frac{B_{ij} P_T^2}{2}, \quad (47)$$

with equality at equal energy. Thus, the allocation maximizes the average geometric separation of that pair over the spatial-code ensemble. The error probability for a realized code is still determined by its actual  $d_{E,ij}$  through (36).  $\square$

The finite optimum in Corollary 3 relies on a fixed total-energy budget. If  $P_s$  and  $\sigma_w^2$  are fixed while only the reference power is increased, the ideal model does not generally predict an equal-energy optimum. In practice, the locally generated reference can be adjusted using the average received-field energy estimated from pilots or spatial averages, so that severe energy imbalance is avoided subject to the detector dynamic range; the preferred ratio remains scenario dependent.

Taken together, the analysis identifies the local conditioning of the parametric training Jacobian and the finite-alphabet minimum energy distance as useful reference-design metrics. They are used here to guide and evaluate feasible reference configurations; global optimization over hardware-constrained phase maps is not pursued.

#### IV. ESTIMATION AND DETECTION ALGORITHMS

Guided by Section III, the continuous, low-dimensional channel parameters are refined by damped Gauss–Newton (GN) where the intensity Jacobian is well conditioned. With the channel fixed, the data symbols form a finite set governed by the energy-domain minimum distance; maximum-likelihood (ML) detection is the benchmark and a reference-assisted Gerchberg–Saxton (GS) iteration provides the scalable implementation.

##### A. Overall Two-Stage Recovery Framework

The proposed receiver retains the two-phase structure of Section II. During training, the far-field model in (6) is parameterized by the real vector

$$\boldsymbol{\eta} = [\boldsymbol{\theta}^T \quad \boldsymbol{\phi}^T \quad \text{Re}\{\boldsymbol{\alpha}\}^T \quad \text{Im}\{\boldsymbol{\alpha}\}^T]^T \in \mathbb{R}^{D_\eta}, \quad (48)$$

where  $\boldsymbol{\theta}$ ,  $\boldsymbol{\phi}$ , and  $\boldsymbol{\alpha}$  collect the polar angles, azimuth angles, and complex path gains, respectively; thus,  $D_\eta = 4L$ . Let  $\mathbf{g}_p(\boldsymbol{\eta}) = \text{col}_t\{\mathbf{H}(\boldsymbol{\eta})\mathbf{x}_p[t]\} \in \mathbb{C}^{Q_p}$ , where  $Q_p = N_r T_p$ . The parametric training model is

$$\mathbf{z}_p = |\mathbf{g}_p(\boldsymbol{\eta}) + \mathbf{b}_p|^2 + \mathbf{w}_p, \quad (49)$$

After Gauss–Newton refinement, the receiver reconstructs  $\hat{\mathbf{H}} = \mathbf{H}(\hat{\boldsymbol{\eta}})$  and forms  $\hat{\mathbf{G}}_d = \mathbf{G}_d(\hat{\mathbf{H}})$  in (13). The training

reference is designed to improve the conditioning of  $\mathbf{J}_p$ , whereas the data reference is designed to enlarge the finite-alphabet energy distance. The following two subsections give the corresponding estimators.

### B. Joint DOA and Channel-Gain Estimation

1) *Nonlinear Least-Squares Formulation*: Based on (49), joint DOA and channel-gain estimation is formulated as

$$\hat{\boldsymbol{\eta}} = \arg \min_{\boldsymbol{\eta} \in \Omega} F_p(\boldsymbol{\eta}), \quad F_p(\boldsymbol{\eta}) \triangleq \frac{1}{2} \left\| \mathbf{z}_p - |\mathbf{g}_p(\boldsymbol{\eta}) + \mathbf{b}_p|^2 \right\|_2^2, \quad (50)$$

where  $\Omega = \Theta^L \times \Phi^L \times \mathcal{A}^L$  is a compact feasible region. Here,  $\Theta \subseteq [0, \pi/2]$  and  $\Phi \subseteq [-\pi/2, \pi/2]$  specify the visible angular sector, while  $\mathcal{A} = \{\alpha \in \mathbb{C} : |\alpha| \leq \alpha_{\max}\}$  imposes a loose gain bound set by the receiver normalization or AGC range. No positive lower gain bound is imposed. This physical parameterization uses  $4L$  real unknowns rather than the  $2N_r L$  real entries of an unstructured channel. Its Jacobian also exposes weak gains and poorly separated DOAs through small singular values.

2) *Jacobian of the Parametric Intensity Mapping*: At the  $t$ -th pilot instant, the noise-free received field is given by

$$\mathbf{g}_p[t] = \sum_{l=1}^L \alpha_l x_{p,l}[t] \mathbf{v}_l, \quad (51)$$

where  $x_{p,l}[t]$  denotes the pilot symbol transmitted by the  $l$ -th user, corresponding to the  $l$ -th entry of the pilot vector  $\mathbf{x}_p[t]$ .

Let  $\boldsymbol{\psi}_l \in \mathbb{R}^{N_r}$  denote the phase vector whose  $\iota(n, m)$ -th entry is  $[\boldsymbol{\psi}_l]_{\iota(n, m)} = \psi_{l, \iota(n, m)}^{(l)}$ . Since  $\mathbf{v}_l(\theta_l, \phi_l) = \exp(j\boldsymbol{\psi}_l)$ , where the exponential is applied element-wise, its angular derivatives can be written as

$$\frac{\partial \mathbf{v}_l}{\partial \theta_l} = j \frac{\partial \boldsymbol{\psi}_l}{\partial \theta_l} \odot \mathbf{v}_l, \quad \frac{\partial \mathbf{v}_l}{\partial \phi_l} = j \frac{\partial \boldsymbol{\psi}_l}{\partial \phi_l} \odot \mathbf{v}_l, \quad (52)$$

where the  $\iota(n, m)$ -th entries are  $[\partial \boldsymbol{\psi}_l / \partial \theta_l]_{\iota(n, m)} = k_0 \cos \theta_l (y_n \cos \phi_l + z_m \sin \phi_l)$  and  $[\partial \boldsymbol{\psi}_l / \partial \phi_l]_{\iota(n, m)} = k_0 \sin \theta_l (-y_n \sin \phi_l + z_m \cos \phi_l)$ .

Using (51), and defining  $\alpha_{l,R} = \text{Re}\{\alpha_l\}$  and  $\alpha_{l,I} = \text{Im}\{\alpha_l\}$ , the field derivatives at pilot instant  $t$  are

$$\begin{aligned} \frac{\partial \mathbf{g}_p[t]}{\partial \theta_l} &= \alpha_l x_{p,l}[t] \frac{\partial \mathbf{v}_l}{\partial \theta_l}, & \frac{\partial \mathbf{g}_p[t]}{\partial \phi_l} &= \alpha_l x_{p,l}[t] \frac{\partial \mathbf{v}_l}{\partial \phi_l}, \\ \frac{\partial \mathbf{g}_p[t]}{\partial \alpha_{l,R}} &= x_{p,l}[t] \mathbf{v}_l, & \frac{\partial \mathbf{g}_p[t]}{\partial \alpha_{l,I}} &= j x_{p,l}[t] \mathbf{v}_l. \end{aligned} \quad (53)$$

The derivatives over all pilot instants are stacked in the same order as  $\mathbf{g}_p(\boldsymbol{\eta})$ . Let  $\mathbf{u}_p(\boldsymbol{\eta}) = \mathbf{g}_p(\boldsymbol{\eta}) + \mathbf{b}_p$ . Thus, the Jacobian of the parametric intensity mapping is

$$\mathbf{J}_p(\boldsymbol{\eta}) = 2 \text{Re} \left\{ \text{diag}(\mathbf{u}_p^*(\boldsymbol{\eta})) \frac{\partial \mathbf{g}_p(\boldsymbol{\eta})}{\partial \boldsymbol{\eta}^T} \right\} \in \mathbb{R}^{Q_p \times D_{\boldsymbol{\eta}}}. \quad (54)$$

The same Jacobian governs local identifiability and GN conditioning. A small  $\sigma_{\min}(\mathbf{J}_p)$  exposes weak parameter directions and unstable updates; phase-diverse references can make these directions observable.

3) *Damped Gauss-Newton Update*: At iteration  $i$ , define  $\mathbf{u}_p^{(i)} = \mathbf{g}_p(\boldsymbol{\eta}^{(i)}) + \mathbf{b}_p$ ,  $\mathbf{e}_p^{(i)} = \mathbf{z}_p - |\mathbf{u}_p^{(i)}|^2$ , and  $\mathbf{J}_p^{(i)} = \mathbf{J}_p(\boldsymbol{\eta}^{(i)})$  denotes the intensity-domain Jacobian evaluated at the current iterate.

The damped Gauss-Newton increment is then computed as

$$\Delta \boldsymbol{\eta}^{(i)} = \left[ \left( \mathbf{J}_p^{(i)} \right)^T \mathbf{J}_p^{(i)} + \lambda^{(i)} \mathbf{I} \right]^{-1} \left( \mathbf{J}_p^{(i)} \right)^T \mathbf{e}_p^{(i)}, \quad (55)$$

Let  $\sigma_{\max}^{(i)}$  and  $\sigma_{\min}^{(i)}$  be the extreme singular values of  $\mathbf{J}_p^{(i)}$ . Theorem 2 motivates the following damping for a target condition number  $\kappa_{\text{tar}} > 1$ :

$$\begin{aligned} \lambda_{\text{stab}}^{(i)} &= \left[ \frac{(\sigma_{\max}^{(i)})^2 - \kappa_{\text{tar}} (\sigma_{\min}^{(i)})^2}{\kappa_{\text{tar}} - 1} \right]_+, \\ \lambda^{(i)} &= \max\{\lambda_{\text{LM}}^{(i)}, \lambda_{\text{stab}}^{(i)}\}. \end{aligned} \quad (56)$$

Here  $\lambda_{\text{LM}}^{(i)}$  follows the acceptance rule, while the stability floor caps the condition number of the regularized normal matrix by  $\kappa_{\text{tar}}$ ; it does not alter the rank or conditioning of the underlying Jacobian. A persistently negligible  $\sigma_{\min}^{(i)}$  instead signals insufficient pilot or reference diversity, which damping cannot restore. The update is

$$\boldsymbol{\eta}_{\text{trial}}^{(i+1)} = \Pi_{\Omega} \left( \boldsymbol{\eta}^{(i)} + \Delta \boldsymbol{\eta}^{(i)} \right), \quad (57)$$

where  $\Pi_{\Omega}(\cdot)$  clips the angles to  $\Theta \times \Phi$  and radially clips each complex gain at  $\alpha_{\max}$ . The trial point is accepted and  $\lambda_{\text{LM}}$  is divided by 3 when it lowers  $F_p$ ; otherwise, the current iterate is retained and  $\lambda_{\text{LM}}$  is multiplied by 10.

4) *Initialization*: Because (50) is nonconvex, we first obtain a coarse unstructured channel estimate from the calibrated spatial reference. Neglecting the second-order unknown-field term in the intensity expansion gives the linearized initializer

$$\mathbf{h}^{(0)} = \arg \min_{\mathbf{h}} \left\| \mathbf{z}_p - |\mathbf{b}_p|^2 - 2 \text{Re} \{ \mathbf{b}_p^* \odot \mathbf{G}_p \mathbf{h} \} \right\|_2^2, \quad (58)$$

from which  $\mathbf{H}^{(0)}$  is reconstructed. Although this approximation is most accurate when the reference term dominates locally, the subsequent damped nonlinear iterations use the complete intensity model.

The initial DOA of each user is then obtained through a coarse angular search,

$$\left( \theta_l^{(0)}, \phi_l^{(0)} \right) = \arg \max_{(\theta, \phi) \in \mathcal{G}_{\Omega}} \frac{|\mathbf{v}^H(\theta, \phi) \mathbf{h}_l^{(0)}|^2}{\|\mathbf{v}(\theta, \phi)\|_2^2}, \quad (59)$$

where  $\mathcal{G}_{\Omega}$  denotes a coarse angular grid. Given the coarse DOA estimate, the corresponding complex path gain is obtained by least-squares projection onto the steering vector. These coarse parameter estimates are then used to initialize the damped Gauss-Newton iterations.

The complete joint estimation procedure is summarized in Algorithm 1.

Because GN is local, the field-based coarse angular estimate is essential for placing the iterate in a well-conditioned basin.

---

**Algorithm 1** Joint DOA and Channel-Gain Estimation
 

---

**Require:**  $\mathbf{z}_p$ ,  $\mathbf{x}_p[t]$ ,  $\mathbf{b}_p$ , receiving-surface geometry,  $\Omega$ ,  $\mathcal{G}_\Omega$ ,  $I_c$ ,  $\lambda_{\text{LM}}^{(0)}$ ,  $\kappa_{\text{tar}}$ , and  $\epsilon_c, \epsilon_0 > 0$ .

**Ensure:** Estimated parameter vector  $\hat{\boldsymbol{\eta}}$  and channel  $\hat{\mathbf{H}}$ .

- 1: Obtain  $\mathbf{H}^{(0)}$  from the linearized spatial-code initializer in (58).
  - 2: Obtain coarse DOAs using (59).
  - 3: Form  $\boldsymbol{\eta}^{(0)}$  according to (48).
  - 4: **for**  $i = 0, 1, \dots, I_c - 1$  **do**
  - 5:   Compute  $\mathbf{u}_p^{(i)} = \mathbf{g}_p(\boldsymbol{\eta}^{(i)}) + \mathbf{b}_p$ .
  - 6:   Compute the residual  $\mathbf{e}_p^{(i)} = \mathbf{z}_p - \left| \mathbf{u}_p^{(i)} \right|^2$ .
  - 7:   Construct  $\mathbf{J}_p^{(i)}$  using (54).
  - 8:   Set  $\lambda^{(i)}$  using the stability floor in (56).
  - 9:   Compute  $\Delta\boldsymbol{\eta}^{(i)}$  using (55).
  - 10:   Compute the projected trial point using (57).
  - 11:   **if** the trial point decreases  $F_p$  **then**
  - 12:     Accept  $\boldsymbol{\eta}^{(i+1)} = \boldsymbol{\eta}_{\text{trial}}^{(i+1)}$ .
  - 13:     Set  $\lambda_{\text{LM}}^{(i+1)} = \lambda_{\text{LM}}^{(i)}/3$ .
  - 14:   **else**
  - 15:     Set  $\boldsymbol{\eta}^{(i+1)} = \boldsymbol{\eta}^{(i)}$ .
  - 16:     Set  $\lambda_{\text{LM}}^{(i+1)} = 10\lambda_{\text{LM}}^{(i)}$ .
  - 17:   **end if**
  - 18:   **if**  $\|\Delta\boldsymbol{\eta}^{(i)}\|_2 / (\|\boldsymbol{\eta}^{(i)}\|_2 + \epsilon_0) < \epsilon_c$  **then**
  - 19:     **break**
  - 20:   **end if**
  - 21: **end for**
  - 22: Set  $\hat{\boldsymbol{\eta}} = \boldsymbol{\eta}^{(i+1)}$ .
  - 23: Reconstruct  $\hat{\mathbf{H}} = \mathbf{H}(\hat{\boldsymbol{\eta}})$ .
- 

### C. Finite-Alphabet Symbol Detection

After training,  $\hat{\mathbf{H}}$  is used to construct  $\hat{\mathbf{G}}_d$  in (13). Because  $\mathbf{s}_d \in \mathcal{S}^{D_s}$  is finite-alphabet, reliability is governed by the energy-domain separation in (34), rather than by a continuous Jacobian rank condition.

1) *Maximum-Likelihood Detection:* Under the adopted independent Gaussian intensity-domain noise model with identical variance, the maximum-likelihood detector is equivalent to

$$\hat{\mathbf{s}}_{\text{ML}} = \arg \min_{\mathbf{s} \in \mathcal{S}^{D_s}} \left\| \mathbf{z}_d - |\hat{\mathbf{G}}_d \mathbf{s} + \mathbf{b}_d|^2 \right\|_2^2. \quad (60)$$

Replacing  $\mathbf{G}_d$  in (34) by  $\hat{\mathbf{G}}_d$  gives the estimated margin. Exhaustive ML still evaluates  $|\mathcal{S}|^{D_s}$  candidates and is mainly a short-block benchmark.

2) *Linearized Initialization and Candidate Screening:* If the reference-induced interference dominates the unknown self-intensity,  $\mathbf{z}_d - |\mathbf{b}_d|^2 \approx \mathbf{A}_d \bar{\mathbf{s}}_d$ , where  $\bar{\mathbf{s}} = [\text{Re}\{\mathbf{s}\}^T, \text{Im}\{\mathbf{s}\}^T]^T$  and

$$\mathbf{A}_d = 2 \left[ \text{Re}\{\text{diag}(\mathbf{b}_d^*) \hat{\mathbf{G}}_d\} \quad -\text{Im}\{\text{diag}(\mathbf{b}_d^*) \hat{\mathbf{G}}_d\} \right]. \quad (61)$$

A regularized real-domain initialization is

$$\bar{\mathbf{s}}_{\text{lin}} = (\mathbf{A}_d^T \mathbf{A}_d + \gamma_{\text{lin}} \mathbf{I})^{-1} \mathbf{A}_d^T (\mathbf{z}_d - |\mathbf{b}_d|^2), \quad (62)$$

where  $\gamma_{\text{lin}} \geq 0$ . The complex estimate  $[\mathbf{I}; j\mathbf{I}] \bar{\mathbf{s}}_{\text{lin}}$  is projected element-wise onto  $\mathcal{S}$  and used either to initialize an iterative detector or to center a reduced ML candidate list.

Let  $0 < \underline{d}_d^{(E)} < \hat{d}_{\text{min},d}^{(E)}$  be a certified bound obtained for the realized reference map from (34) or another valid restricted-distance bound. A candidate  $\mathbf{s}_c$  is the unique ML solution whenever

$$r(\mathbf{s}_c) \triangleq \left\| \mathbf{z}_d - |\hat{\mathbf{G}}_d \mathbf{s}_c + \mathbf{b}_d|^2 \right\|_2 < \frac{\underline{d}_d^{(E)}}{2}. \quad (63)$$

Every other candidate then has residual at least  $\underline{d}_d^{(E)} - r(\mathbf{s}_c) > r(\mathbf{s}_c)$  by the triangle inequality. The test is therefore applied to the linearized candidate and subsequently to the GS iterates.

3) *Reference-Assisted Gerchberg–Saxton Detection:* GS alternates between measurement-magnitude and signal-domain constraints. We adapt it to the affine model by including the reference in the forward field and removing it before back-projection.

Given the current symbol estimate  $\mathbf{s}^{(i)}$ , the predicted affine field is

$$\mathbf{u}_d^{(i)} = \hat{\mathbf{G}}_d \mathbf{s}^{(i)} + \mathbf{b}_d. \quad (64)$$

The measured-magnitude constraint is then enforced as

$$\tilde{\mathbf{u}}_d^{(i)} = \sqrt{[\mathbf{z}_d]_+} \odot \exp(j \angle \mathbf{u}_d^{(i)}), \quad (65)$$

where  $[\mathbf{z}]_+ = \max(\mathbf{z}, \mathbf{0})$  is applied element-wise.

The reference vector is then removed, and the resulting field is projected back onto the signal domain. To improve numerical stability when  $\hat{\mathbf{G}}_d$  is ill-conditioned, define the regularized back-projection matrix

$$\mathbf{B}_d = (\hat{\mathbf{G}}_d^H \hat{\mathbf{G}}_d + \gamma \mathbf{I})^{-1} \hat{\mathbf{G}}_d^H, \quad (66)$$

where  $\gamma \geq 0$  is a regularization parameter. When  $\gamma = 0$  and  $\hat{\mathbf{G}}_d$  has full column rank,  $\mathbf{B}_d = \hat{\mathbf{G}}_d^\dagger$ .

The continuous signal-domain update is

$$\tilde{\mathbf{s}}^{(i+1)} = \mathbf{B}_d (\tilde{\mathbf{u}}_d^{(i)} - \mathbf{b}_d). \quad (67)$$

The finite-alphabet structure is incorporated through

$$\mathbf{s}^{(i+1)} = \mathcal{Q}_\mathcal{S}(\tilde{\mathbf{s}}^{(i+1)}), \quad (68)$$

where  $\mathcal{Q}_\mathcal{S}(\cdot)$  denotes element-wise nearest-neighbor quantization onto the constellation  $\mathcal{S}$ .

In the proposed detector, (68) is applied after every back-projection to exploit the finite-alphabet prior. The complete procedure is summarized in Algorithm 2.

$\mathbf{B}_d$  and the distance bound are precomputed per coherence block; well-separated blocks can therefore terminate after few GS iterations.

As an iterative baseline, projected Wirtinger flow (WF) [30] applies gradient steps to the same affine intensity loss, projects the continuous iterate onto the constellation convex hull, and uses final nearest-neighbor quantization. It uses the same linearized initialization and distance certificate as GS.

### D. Computational Complexity and Implementation Considerations

Let  $I_c$ ,  $I_d$ , and  $I_{\text{WF}}$  denote the numbers of channel-estimation, GS, and projected-WF iterations, respectively. The principal computational costs are summarized in Table I.

TABLE I  
COMPUTATIONAL COMPLEXITY OF THE MAIN RECOVERY ALGORITHMS

| Method                | Unknown dimension | Approximate complexity                      | Primary role                           |
|-----------------------|-------------------|---------------------------------------------|----------------------------------------|
| Joint damped GN       | $D_\eta$          | $\mathcal{O}(I_c(Q_p D_\eta^2 + D_\eta^3))$ | DOA and channel-gain estimation        |
| Exhaustive ML         | $D_s$             | $\mathcal{O}( S ^{D_s} Q_d D_s)$            | Performance benchmark                  |
| Linearized detector   | $D_s$             | $\mathcal{O}(Q_d D_s^2 + D_s^3)$            | Initialization and candidate screening |
| Projected WF          | $D_s$             | $\mathcal{O}(I_{WF} Q_d D_s)$               | Iterative detection baseline           |
| Reference-assisted GS | $D_s$             | $\mathcal{O}(I_d Q_d D_s)$                  | Low-complexity symbol detection        |

**Algorithm 2** Reference-Assisted Gerchberg–Saxton Symbol Detection

**Require:**  $\mathbf{z}_d, \hat{\mathbf{G}}_d, \mathbf{b}_d, \mathcal{S}, \underline{d}_d^{(E)}, \gamma, I_d$ , and  $\epsilon_d, \epsilon_0 > 0$ .

**Ensure:** Detected symbol vector  $\hat{\mathbf{s}}_d$ .

- 1: Compute  $\mathbf{r}_d = \sqrt{[\mathbf{z}_d]_+}$ .
- 2: Precompute  $\mathbf{B}_d$  according to (66).
- 3: Initialize  $\mathbf{s}^{(0)}$  using a linearized estimate, the previous data block, or a random constellation vector.
- 4: **for**  $i = 0, 1, \dots, I_d - 1$  **do**
- 5:   Compute the predicted affine field using (64).
- 6:   Evaluate  $r(\mathbf{s}^{(i)})$  in (63).
- 7:   **if**  $r(\mathbf{s}^{(i)}) < \underline{d}_d^{(E)}/2$  **then**
- 8:     Output  $\hat{\mathbf{s}}_d = \mathbf{s}^{(i)}$  and terminate.
- 9:   **end if**
- 10:   Apply the magnitude constraint using (65).
- 11:   Back-project using (67).
- 12:   Apply the constellation projection using (68).
- 13:   **if**  $\|\mathbf{s}^{(i+1)} - \mathbf{s}^{(i)}\|_2 / (\|\mathbf{s}^{(i)}\|_2 + \epsilon_0) < \epsilon_d$  **then**
- 14:     **break**
- 15:   **end if**
- 16: **end for**
- 17: Output  $\hat{\mathbf{s}}_d = \mathcal{Q}_\mathcal{S}(\mathbf{s}^{(i+1)})$ .

GN forms  $\mathbf{J}_p^T \mathbf{J}_p$  and solves a  $D_\eta \times D_\eta$  system, where  $D_\eta = 4L \ll 2N_r L$ . Forming  $\mathbf{B}_d$  costs  $\mathcal{O}(Q_d D_s^2 + D_s^3)$  once per coherence block. Given  $\underline{d}_d^{(E)}$ , each online certificate test has the same order as one forward projection. Exact construction by pairwise enumeration, however, costs  $\mathcal{O}(Q_d |\mathcal{S}|^{2D_s})$  per channel and reference configuration; it is used here only for the short blocks in the simulations and is excluded from the online orders in Table I.

*E. Cramér–Rao Lower Bound for DOA Estimation*

The CRLB follows directly from the parametric training model in (49) and its Jacobian in (54). Under the effective intensity-domain approximation introduced in Section II, assume that the noise is white Gaussian,  $\mathbf{w}_p \sim \mathcal{N}(\mathbf{0}, \sigma_p^2 \mathbf{I})$ , with variance independent of the unknown parameters. Repartition the real parameter vector in (48) as  $\boldsymbol{\eta} = [\boldsymbol{\psi}^T, \boldsymbol{\nu}^T]^T$ , where  $\boldsymbol{\psi} = [\boldsymbol{\theta}^T, \boldsymbol{\phi}^T]^T$  contains the DOAs and  $\boldsymbol{\nu} = [\text{Re}\{\boldsymbol{\alpha}\}^T, \text{Im}\{\boldsymbol{\alpha}\}^T]^T$  contains the nuisance path gains. The Fisher information matrix (FIM) is then

$$\mathbf{F}(\boldsymbol{\eta}) = \frac{1}{\sigma_p^2} \mathbf{J}_p^T(\boldsymbol{\eta}) \mathbf{J}_p(\boldsymbol{\eta}), \quad (69)$$

with the column partition  $\mathbf{J}_p = [\mathbf{J}_\psi \ \mathbf{J}_\nu]$ . Eliminating the unknown gains gives the equivalent FIM for the DOAs,

$$\begin{aligned} \mathbf{F}_{\text{DOA}} &= \mathbf{F}_{\psi\psi} - \mathbf{F}_{\psi\nu} \mathbf{F}_{\nu\nu}^\dagger \mathbf{F}_{\nu\psi} \\ &= \frac{1}{\sigma_p^2} \mathbf{J}_\psi^T \mathbf{P}_\nu^\perp \mathbf{J}_\psi, \\ \mathbf{P}_\nu^\perp &= \mathbf{I} - \mathbf{J}_\nu \mathbf{J}_\nu^\dagger, \end{aligned} \quad (70)$$

where  $(\cdot)^\dagger$  denotes the Moore–Penrose inverse. Thus, only the component of an angle-induced intensity perturbation orthogonal to the gain perturbation subspace carries DOA information. If  $\mathbf{F}_{\text{DOA}}$  is nonsingular, any unbiased DOA estimator satisfies

$$\text{Cov}(\hat{\boldsymbol{\psi}}) \succeq \mathbf{F}_{\text{DOA}}^{-1}. \quad (71)$$

The diagonal entries give the individual bounds for  $\theta_l$  and  $\phi_l$ . Thus, weak or rank-deficient directions of  $\mathbf{P}_\nu^\perp \mathbf{J}_\psi$  respectively produce large or unbounded DOA limits, linking reference design directly to attainable angular accuracy.

V. SIMULATION RESULTS

Numerical results first validate the identifiability and accuracy limits in Section III, and then examine how the resulting stability and distance criteria improve the algorithms in Section IV. The remaining experiments quantify the effects of measurement diversity and reference–signal energy balance.

Unless otherwise stated, the simulations follow the two-phase model in Section II with a two-user  $8 \times 8$  RF holographic receiving surface operating at 3.5 GHz and half-wavelength element spacing. The complex path gains are  $\alpha_1 = e^{j0.35}$  and  $\alpha_2 = 0.85e^{-j0.55}$ , normalized QPSK is used, and the reference amplitude is 1.5. Each fixed spatial reference map assigns phases from  $\{0, \pi/2, \pi, 3\pi/2\}$  across the receiving units and is reused over time; one energy integration is taken per symbol ( $M = 1$ ). Training and data observations follow (49) and (13) with independent real Gaussian effective output noise of variance  $\sigma_w^2$  per intensity sample. For a noiseless intensity vector  $\boldsymbol{\mu} = |\mathbf{G}\boldsymbol{\vartheta} + \mathbf{b}|^2 \in \mathbb{R}^Q$ , the SNR is defined as

$$\text{SNR} = 10 \log_{10} \left( \frac{\mathbb{E}\{\|\boldsymbol{\mu}\|_2^2\}}{Q\sigma_w^2} \right). \quad (72)$$

Here, the expectation is evaluated over the noiseless samples of the corresponding experiment and, in the data phase, over equiprobable transmitted symbol vectors. Scenario-specific DOAs, pilot lengths, and reference or surface configurations are stated with the corresponding experiments.

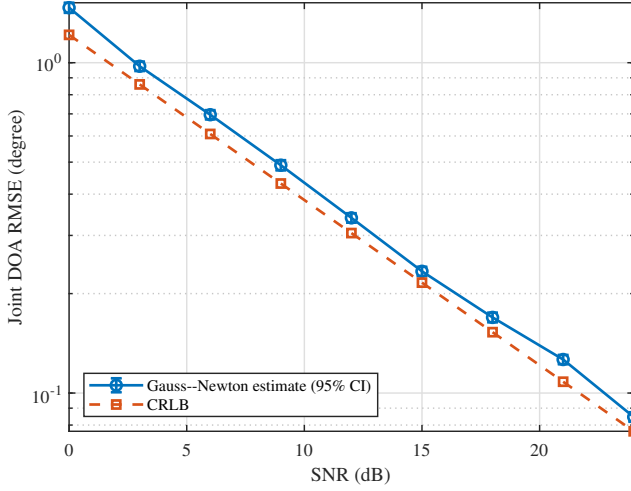


Fig. 3. Joint DOA RMSE and the corresponding root CRLB versus SNR under the fixed spatial four-phase reference code. Error bars show 95% confidence intervals.

#### A. Channel Estimation Performance

For  $N_{MC}$  Monte Carlo trials, let  $\psi_l = [\theta_l, \varphi_l]^T$  and  $\hat{\psi}_l^{(r)}$  denote the true and estimated angular vectors of user  $l$ , respectively, expressed in degrees. The scalar quantities reported in Fig. 3 are

$$\text{RMSE}_{\text{DOA}} = \left[ \frac{1}{N_{MC}L} \sum_{r=1}^{N_{MC}} \sum_{l=1}^L \left\| \hat{\psi}_l^{(r)} - \psi_l \right\|_2^2 \right]^{1/2}, \quad (73)$$

$$\text{rCRLB}_{\text{DOA}} = \frac{180}{\pi} \left[ \frac{1}{L} \text{tr}(\mathbf{F}_{\text{DOA}}^{-1}) \right]^{1/2}.$$

We first use  $T_p = 32$  QPSK pilots and user DOAs  $(15^\circ, 8^\circ)$  and  $(35^\circ, -10^\circ)$ . Based on 1000 noise realizations, Fig. 3 shows that the joint DOA RMSE decreases from 1.47° at 0 dB to 0.085° at 24 dB and closely follows the CRLB. Since the constrained nonlinear estimator can be biased at finite SNR, the unbiased-estimator CRLB is interpreted as a local accuracy benchmark rather than a strict finite-sample bound.

Figure 4 next examines the counting hierarchy in (33) for the per-element  $L = 2$  unstructured training problem. All operating points use prefixes of the same QPSK pilot sequence and 10,000 paired trials. The fixed-reference curve is the scalar restriction of the spatial code to a representative receiving unit. At  $T_p = 2L$ , its noiseless multistart success probability is about 0.54; at  $T_p = 3L$ , it exceeds 0.99. The no-reference model retains its global phase ambiguity and an approximately 3 dB NMSE floor. Beyond the identifiability threshold, additional measurements improve noise robustness, reaching about  $-19.3$  dB at  $T_p = 48$ . Success for an individual instance below  $3L$  does not establish global injectivity over the entire unstructured channel space.

Beyond the structural counting threshold, the training length required in noise depends on the local estimation stability. We therefore use the Jacobian and CRLB analysis to decide whether additional pilots should be acquired. Figure 5 compares this policy with fixed short and long training, a noise-aware residual stopping rule, and an oracle stopping

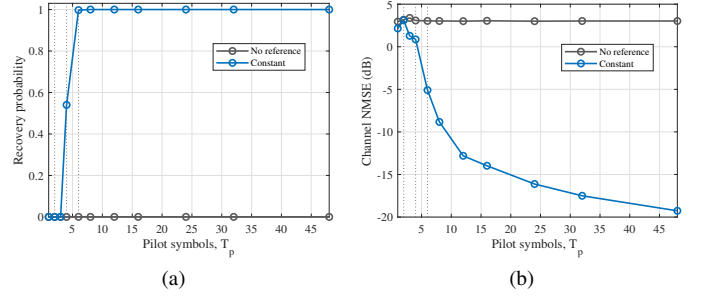


Fig. 4. Effect of pilot count for the two-user unstructured training problem: (a) empirical noiseless multistart recovery probability and (b) channel NMSE at 12 dB, with and without a fixed nonzero reference. The vertical lines mark  $T_p = L, 2L$ , and  $3L$ .

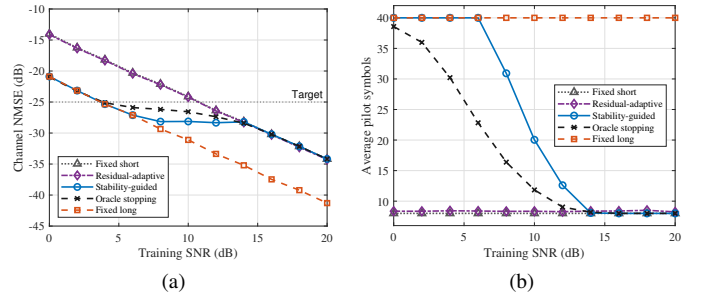


Fig. 5. Stability-guided adaptive training with the practical Algorithm 1 initialization: (a) channel NMSE and (b) average selected pilot symbols versus training SNR. The fixed-short and fixed-long schemes use  $T_p = 8$  and 40, respectively; oracle stopping uses the true channel error only as an unattainable benchmark. Each point averages 300 paired trials.

rule based on the true channel error. All policies use the same nested QPSK pilot prefixes, the practical initialization in Algorithm 1, and LM refinement; the coarse grid uses  $0.5^\circ$  and  $1^\circ$  spacings in the polar and azimuth angles, respectively, and  $\alpha_{\max} = 2$  under the adopted gain normalization. The experiment uses two users at polar angles  $19^\circ$  and  $21^\circ$  with a common  $5^\circ$  azimuth, the fixed spatial phase map, candidate lengths  $T_p \in \{8, 12, \dots, 40\}$ , and 300 paired trials per SNR. The proposed policy selects the shortest prefix whose predicted channel CRLB-NMSE is below  $-25$  dB, DOA CRLB is below  $1^\circ$ , and Jacobian normal-matrix condition number is below  $5 \times 10^3$ .

The residual rule stops near  $T_p = 8$  even when the physical parameters remain inaccurate: at 8 dB it uses 8.33 pilot symbols and yields  $-22.22$  dB NMSE. The proposed policy instead selects 30.92 symbols and reaches  $-28.16$  dB. At 10 and 12 dB, it uses 20.04 and 12.60 symbols to attain  $-28.13$  and  $-28.34$  dB, respectively, and from 14 dB onward it selects essentially the shortest prefix. Fixed long training gives the lowest NMSE but always uses 40 symbols, whereas the proposed overhead closely follows the oracle transition. Thus, the stability analysis detects information insufficiency that a small fitting residual alone does not reveal and converts it into a direct accuracy-overhead gain.

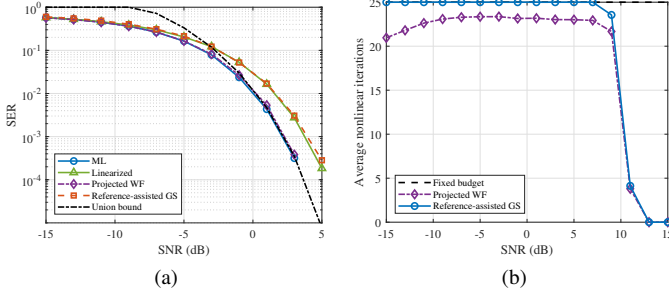


Fig. 6. Perfect-CSI detection: (a) SER of ML, linearized, projected-WF, and reference-assisted GS detectors together with the analytical distance-spectrum union bound, and (b) their average nonlinear iterations under the exact  $d_{\min}^{(E)}$  stopping certificate. Empirical SER points with no observed errors are omitted.

### B. Symbol Detection Performance with Perfect CSI

We isolate the detector from channel-estimation errors by constructing  $\mathbf{G}_d$  from the true channel. Two QPSK users and the simultaneous spatial four-phase map with  $\rho = 1.5$  are used. In Fig. 6(a), each point contains 30,000 symbol-vector trials. Exhaustive ML remains the accuracy benchmark, while projected WF provides a gradient-based iterative baseline for the linearized and GS detectors. At -5 dB, the ML, projected-WF, and certified-GS SERs are 0.164, 0.165, and 0.214, respectively. Weighting the pairwise error probabilities in Theorem 3 by the normalized Hamming distances and summing over all candidate pairs gives the analytical SER union bound. It equals 0.333 at -5 dB and approaches the ML curve in the waterfall region.

Figure 6(b) evaluates the stopping test in (63) using the same trials. At low SNR the certificate is deliberately inactive and both iterative methods approach the 25-iteration budget. At 11 dB, their average iteration counts fall to 3.80 for projected WF and 4.13 for GS, and both are essentially zero at 13 dB once the initialized candidate lies inside the exact decoding radius. A projected-WF iteration includes a gradient evaluation and backtracking, whereas GS uses the precomputed closed-form back-projection.

To verify the pairwise theory directly, Fig. 7 uses 32 equal-power fixed spatial phase maps spanning a broad range of normalized minimum distances. For each map, Monte Carlo simulation is applied to its closest candidate pair. The results follow the Gaussian expression in (36), confirming that increasing the worst-case intensity separation lowers the corresponding pairwise error probability and validates  $d_{\min}^{(E)}$  as a reference-design metric.

### C. End-to-End Symbol Detection with Estimated CSI

We next propagate the channel estimates from the preceding adaptive-training experiment to exhaustive data detection. The data SNR is fixed at 0 dB, and each of the 300 independent training-noise realizations uses 200 data vectors. The observations are generated with the true channel, whereas each estimated-CSI ML detector constructs its candidate templates from the corresponding channel estimate. The fixed-short, stability-guided, and fixed-long receivers differ only in the

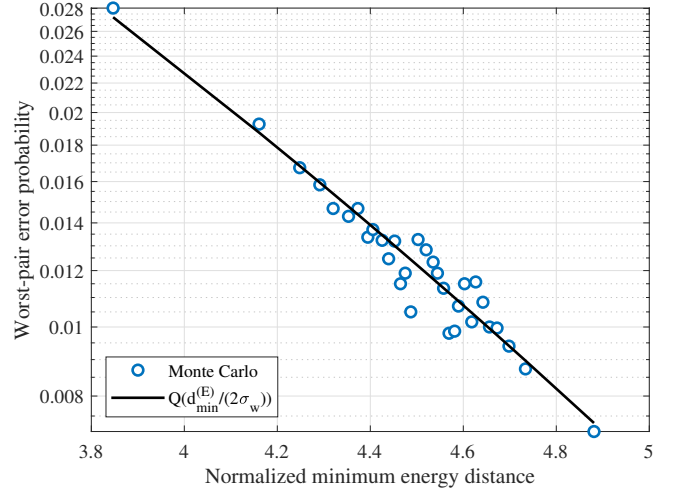


Fig. 7. Worst-pair error probability versus normalized energy-domain minimum distance over equal-power fixed spatial phase maps.

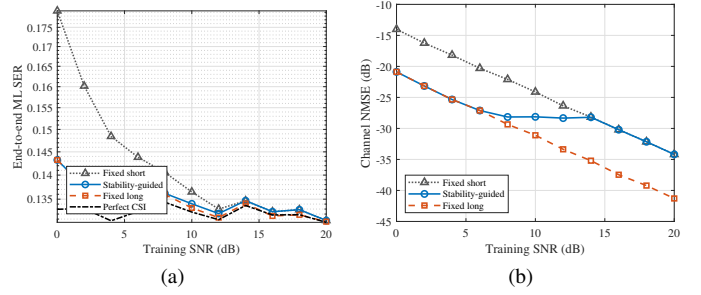


Fig. 8. End-to-end comparison versus training SNR: (a) SER of the fixed-short, stability-guided, and fixed-long training policies with perfect-CSI ML as a benchmark and (b) their channel NMSE. The data SNR is 0 dB.

pilot prefix used to form their CSI; the perfect-CSI curve identifies the data-noise floor.

At low training SNR, the stability rule requests the long prefix and closely tracks fixed-long training. At 0 dB, for example, it reduces the end-to-end SER from about 0.18 with eight pilots to about 0.14, while the associated channel NMSE improves from -14.0 to -20.9 dB. As training SNR increases, the selected prefix shortens and all estimated-CSI curves approach the perfect-CSI floor. This verifies that the stability test improves detection by controlling channel-error propagation rather than by altering the detector.

### D. Effect of Surface Size and Angular Separation

We next examine how receiving-surface size and angular separation change the finite-alphabet decision margin. To compare configurations with different numbers of observations,  $d_{\min}^{(E)}$  is normalized by the root-mean-square noiseless intensity. The two-user QPSK setting and fixed spatial four-phase map are used unless otherwise stated.

At -12 dB, Fig. 9 shows that increasing  $N_r$  from 4 to 1024 raises the normalized minimum distance from 0.56 to 19.61 and lowers the ML SER from 0.693 to  $9.95 \times 10^{-3}$ . This close correspondence demonstrates the combined benefit of

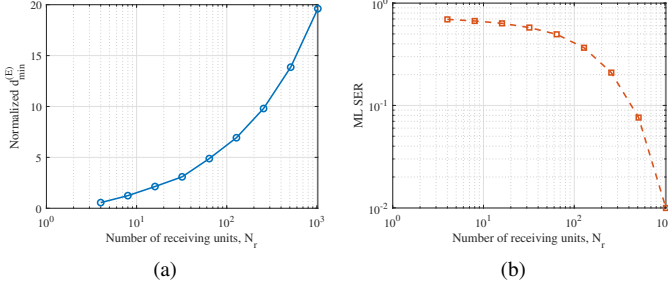


Fig. 9. Combined effect of receiving-surface size and observation count on (a) the normalized energy-domain minimum distance and (b) perfect-CSI ML detection at  $-12$  dB.

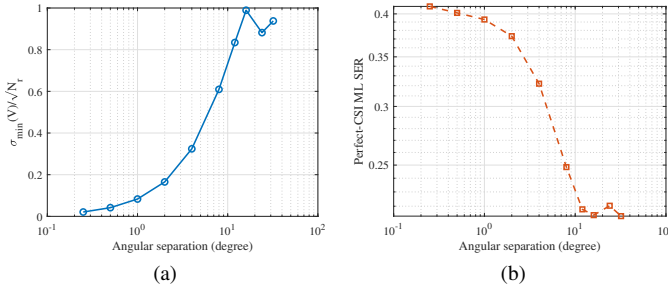


Fig. 10. Effect of user angular separation on (a) array-manifold conditioning and (b) perfect-CSI ML detection at  $-6$  dB.

the enlarged aperture and the increased number of intensity observations.

Figure 10 connects spatial conditioning to detection. Increasing the separation from  $0.25^\circ$  to  $8^\circ$  raises the normalized minimum singular value from 0.0209 to 0.609 and lowers the perfect-CSI SER from 0.409 to 0.248 at  $-6$  dB. The mild nonmonotonicity at larger separations reflects finite-aperture sidelobes.

Together, these results show that surface size, observation count, and array-manifold conditioning must preserve relevant field differences before the reference-assisted projection can separate their intensities.

#### E. Effect of the Reference-to-Signal Energy Ratio

We finally examine the energy allocation in Corollary 3. The total average incident energy per unit is fixed as  $P_s + P_b = 1$ . Hence, sweeping the reference-to-signal energy ratio  $\text{RSR} = 10 \log_{10}(P_b/P_s)$  changes only the allocation between the unknown and reference fields, rather than the detector power budget. Figure 11 averages over 24 phase-balanced fixed maps, each assigning every reference phase to 16 receiving units, with 1500 symbol trials per map and ratio. For each map, the noise variance is calibrated at  $\text{RSR} = 0$  and then held fixed throughout the sweep.

Figure 11(a) shows that the ensemble-mean minimum distance is maximized near balance, at the sampled value  $\text{RSR} = -3$  dB for this constellation and channel. The shift from exactly 0 dB is consistent with (45), whose optimum depends on the amplitude term  $A_{ij}/B_{ij}$ . The ML curves in panel (b) have the corresponding bowl shape at all three noise levels.

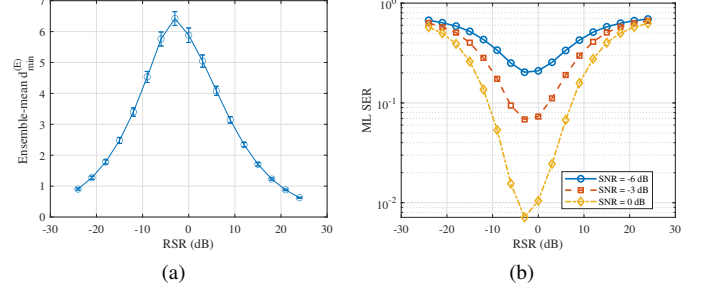


Fig. 11. Effect of the reference-to-signal energy ratio under a fixed total incident-energy budget: (a) ensemble-mean minimum energy distance over phase-balanced spatial maps and (b) perfect-CSI ML SER at three balanced-case SNRs. Error bars show one standard deviation across phase maps.

Thus, the relevant design conclusion is not a universal 0-dB optimum: severe imbalance in either direction weakens phase-sensitive separation, while the preferred ratio can be tuned from training data subject to detector dynamic range.

## VI. CONCLUSION

This paper developed a reference-assisted RF holographic receiver for recovering complex channel and data information from intensity-only measurements. For the resulting affine intensity model, we established Jacobian-based uniqueness and stability conditions for continuous channel sensing and an energy-domain minimum-distance criterion for finite-alphabet detection. The analysis further revealed the roles of pilot diversity, spatial four-phase reference coding, and reference-signal energy balance. Guided by these results, we designed a two-stage receiver combining linearized initialization, stability-guided adaptive training, damped Gauss-Newton estimation, and distance-certified GS detection. Simulations under representative two-user far-field settings supported the predicted trends and showed that the adaptive scheme reduced the average pilot length from 40 to 20.0 at 10 dB while attaining  $-28.1$  dB channel NMSE. These results demonstrate the feasibility of recovering complex communication information without coherent I/Q acquisition.

## REFERENCES

- [1] Q. Wu and R. Zhang, "Intelligent reflecting surface enhanced wireless network via joint active and passive beamforming," *IEEE Trans. Wireless Commun.*, vol. 18, no. 11, pp. 5394–5409, Nov. 2019.
- [2] B. Di, H. Zhang, L. Song, Y. Li, and G. Y. Li, "Reconfigurable intelligent surface-based wireless communications: Antenna design, prototyping, and experimental results," *IEEE Access*, vol. 7, pp. 90 013–90 023, 2019.
- [3] Q. Wu and R. Zhang, "Towards smart and reconfigurable environment: Intelligent reflecting surface aided wireless network," *IEEE Commun. Mag.*, vol. 58, no. 1, pp. 106–112, 2020.
- [4] E. Basar, M. D. Renzo, J. de Rosny, M. Debbah, M.-S. Alouini, and R. Zhang, "Wireless communications through reconfigurable intelligent surfaces," *IEEE Access*, vol. 7, pp. 116 753–116 773, 2019.
- [5] C. Huang, A. Zappone, G. C. Alexandropoulos, M. Debbah, and C. Yuen, "Reconfigurable intelligent surfaces for energy efficiency in wireless communication," *IEEE Trans. Wireless Commun.*, vol. 18, no. 8, pp. 4157–4170, Aug. 2019.
- [6] M. D. Renzo, A. Zappone, M. Debbah, M.-S. Alouini, C. Yuen, J. de Rosny, and S. Tretyakov, "Smart radio environments empowered by reconfigurable intelligent surfaces: How it works, state of research, and the road ahead," *IEEE J. Sel. Areas Commun.*, vol. 38, no. 11, pp. 2450–2525, Nov. 2020.

- [7] C. Pan, H. Ren, K. Wang, J. F. Kolb, M. El Kashlan, M. Chen, M. D. Renzo, Y. Hao, J. Wang, A. L. Swindlehurst, X. You, and L. Hanzo, "Reconfigurable intelligent surfaces for 6G systems: Principles, applications, and research directions," *IEEE Commun. Mag.*, vol. 59, no. 6, pp. 14–20, Jun. 2021.
- [8] E. Björnson, H. Wymeersch, B. Matthiesen, P. Popovski, L. Sanguinetti, and E. de Carvalho, "Reconfigurable intelligent surfaces: A signal processing perspective with wireless applications," *IEEE Signal Process. Mag.*, vol. 39, no. 2, pp. 135–158, Mar. 2022.
- [9] M. D. Renzo, F. H. Danufane, and S. Tretjakov, "Communication models for reconfigurable intelligent surfaces: From surface electromagnetics to wireless networks optimization," *Proc. IEEE*, vol. 110, no. 9, pp. 1164–1209, Sep. 2022.
- [10] S. Hu, F. Rusek, and O. Edfors, "Beyond massive MIMO: The potential of data transmission with large intelligent surfaces," *IEEE Trans. Signal Process.*, vol. 66, no. 10, pp. 2746–2758, May 2018.
- [11] D. Dardari, "Communicating with large intelligent surfaces: Fundamental limits and models," *IEEE J. Sel. Areas Commun.*, vol. 38, no. 11, pp. 2526–2537, Nov. 2020.
- [12] C. Huang, S. Hu, G. C. Alexandropoulos, A. Zappone, C. Yuen, R. Zhang, M. D. Renzo, and M. Debbah, "Holographic MIMO surfaces for 6G wireless networks: Opportunities, challenges, and trends," *IEEE Wireless Commun.*, vol. 27, no. 5, pp. 118–125, Oct. 2020.
- [13] H. Zhang, S. Zeng, B. Di, Y. Tan, M. D. Renzo, and L. Song, "Holographic radio surfaces: From theory to realization," *IEEE Wireless Commun.*, vol. 28, no. 4, pp. 20–26, Aug. 2021.
- [14] J. An, C. Yuen, Y. L. Guan, M. Di Renzo, M. Debbah, H. V. Poor, and L. Hanzo, "Stacked intelligent metasurface performs a 2D DFT in the wave domain for DOA estimation," in *Proc. IEEE Int. Conf. Commun. (ICC)*, 2024, pp. 3445–3451.
- [15] F. Wang, T. Mi, C. Wang, R. Xiong, Z. Wang, and R. C. Qiu, "Source localization and power estimation through RISs: Performance analysis and prototype validations," *IEEE Trans. Wireless Commun.*, vol. 25, pp. 9406–9420, 2026.
- [16] J. Zhu, Z. Gu, Q. Ma, L. Dai, and T. J. Cui, "A self-controlled reconfigurable intelligent surface inspired by optical holography," *Nat. Electron.*, vol. 8, pp. 1108–1118, Nov. 2025.
- [17] S. Li, T. Mao, G. Liu, F. Zhang, R. Liu, M. Hua, Z. Gao, Q. Wu, and G. K. Karagiannidis, "Intelligent metasurface-enabled integrated sensing and communication: Unified framework and key technologies," *IEEE Wireless Commun.*, vol. 33, no. 1, pp. 216–223, Feb. 2026.
- [18] M. Cao, X. Liu, H. Zhang, Y. C. Eldar, and H. Zhang, "Hybrid near-field and far-field localization with holographic MIMO," *IEEE Trans. Wireless Commun.*, vol. 25, pp. 10 560–10 575, 2026.
- [19] Z. Zhang and L. Dai, "Wavenumber-domain signal processing for holographic MIMO: Foundations, methods, and future directions," *IEEE Commun. Standards Mag.*, vol. 10, no. 2, pp. 127–133, Jun. 2026.
- [20] Y. Shen, J. Zhang, S. Jin, and B. Ai, "Intelligent reflecting surface assisted wireless communication with intensity detection," *IEEE Trans. Wireless Commun.*, vol. 19, no. 12, pp. 8316–8328, Dec. 2020.
- [21] J. Huang, Y. Wu, H. Yin, Y. Zhang, and R. Zhang, "Channel sensing for holographic interference surfaces based on the principle of interferometry," *IEEE Trans. Wireless Commun.*, vol. 23, no. 7, pp. 7953–7966, Jul. 2024.
- [22] J. M. Kahn and J. R. Barry, "Wireless infrared communications," *Proc. IEEE*, vol. 85, no. 2, pp. 265–298, Feb. 1997.
- [23] J. Armstrong, "OFDM for optical communications," *J. Lightw. Technol.*, vol. 27, no. 3, pp. 189–204, Feb. 2009.
- [24] J. R. Fienup, "Phase retrieval algorithms: A comparison," *Appl. Opt.*, vol. 21, no. 15, pp. 2758–2769, Aug. 1982.
- [25] Y. Shechtman, Y. C. Eldar, O. Cohen, H. N. Chapman, J. Miao, and M. Segev, "Phase retrieval with application to optical imaging: A contemporary overview," *IEEE Signal Process. Mag.*, vol. 32, no. 3, pp. 87–109, May 2015.
- [26] E. J. Candès, T. Strohmer, and V. Voroninski, "PhaseLift: Exact and stable signal recovery from magnitude measurements via convex programming," *Commun. Pure Appl. Math.*, vol. 66, no. 8, pp. 1241–1274, Aug. 2013.
- [27] E. J. Candès, Y. C. Eldar, T. Strohmer, and V. Voroninski, "Phase retrieval via matrix completion," *SIAM Rev.*, vol. 57, no. 2, pp. 225–251, 2015.
- [28] I. Waldspurger, A. d'Aspremont, and S. Mallat, "Phase recovery, Max-Cut and complex semidefinite programming," *Math. Program.*, vol. 149, no. 1–2, pp. 47–81, 2015.
- [29] P. Netrapalli, P. Jain, and S. Sanghavi, "Phase retrieval using alternating minimization," *IEEE Trans. Signal Process.*, vol. 63, no. 18, pp. 4814–4826, Sep. 2015.
- [30] E. J. Candès, X. Li, and M. Soltanolkotabi, "Phase retrieval via Wirtinger flow: Theory and algorithms," *IEEE Trans. Inf. Theory*, vol. 61, no. 4, pp. 1985–2007, Apr. 2015.
- [31] Y. Liu, "On solving phase retrieval problems via neural networks: A unified framework with provable guarantees," *EURASIP J. Adv. Signal Process.*, vol. 2026, no. 1, p. 15, 2026.
- [32] R. Balan, P. Casazza, and D. Edidin, "On signal reconstruction without phase," *Appl. Comput. Harmon. Anal.*, vol. 20, no. 3, pp. 345–356, May 2006.
- [33] A. S. Bandeira, J. Cahill, D. G. Mixon, and A. A. Nelson, "Saving phase: Injectivity and stability for phase retrieval," *Appl. Comput. Harmon. Anal.*, vol. 37, no. 1, pp. 106–125, Jul. 2014.
- [34] Y. C. Eldar and S. Mendelson, "Phase retrieval: Stability and recovery guarantees," *Appl. Comput. Harmon. Anal.*, vol. 36, no. 3, pp. 473–494, May 2014.
- [35] A. Conca, D. Edidin, M. Hering, and C. Vinzant, "An algebraic characterization of injectivity in phase retrieval," *Appl. Comput. Harmon. Anal.*, vol. 38, no. 2, pp. 346–356, Mar. 2015.
- [36] P. Grohs, S. Koppensteiner, and M. Rathmair, "Phase retrieval: Uniqueness and stability," *SIAM Rev.*, vol. 62, no. 2, pp. 301–350, 2020.
- [37] D. Gabor, "A new microscopic principle," *Nature*, vol. 161, no. 4098, pp. 777–778, May 1948.
- [38] E. N. Leith and J. Upatnieks, "Reconstructed wavefronts and communication theory," *J. Opt. Soc. Amer.*, vol. 52, no. 10, pp. 1123–1130, Oct. 1962.
- [39] I. Yamaguchi and T. Zhang, "Phase-shifting digital holography," *Opt. Lett.*, vol. 22, no. 16, pp. 1268–1270, Aug. 1997.
- [40] B. Gao, Q. Sun, Y. Wang, and Z. Xu, "Phase retrieval from the magnitudes of affine linear measurements," *Adv. Appl. Math.*, vol. 93, pp. 121–141, 2018.
- [41] P. Walk, H. Becker, and P. Jung, "OFDM channel estimation via phase retrieval," in *Proc. 49th Asilomar Conf. Signals, Syst., Comput.*, 2015, pp. 1161–1168.
- [42] J. Huang and H. Yin, "Wideband channel sensing with holographic interference surfaces," *IEEE Trans. Wireless Commun.*, vol. 25, pp. 7164–7175, 2026.
- [43] G. Zhou, Z. Peng, C. Pan, and R. Schober, "Individual channel estimation for RIS-aided communication systems—a general framework," *IEEE Trans. Wireless Commun.*, vol. 23, no. 9, pp. 12 038–12 053, 2024.
- [44] A. Abdallah, A. Celik, M. M. Mansour, and A. M. Eltawil, "Multi-agent DRL for distributed codebook design in RIS-aided cell-free massive MIMO networks," *IEEE Trans. Commun.*, vol. 73, no. 5, pp. 3283–3297, 2025.
- [45] Z. Yu, J. An, L. Gan, H. Li, and S. Chatzinotas, "Weighted codebook scheme for RIS-assisted point-to-point MIMO communications," *IEEE Wireless Commun. Lett.*, vol. 14, no. 5, pp. 1571–1575, 2025.
- [46] H. Yin, J. Huang, R. Zhang, J. Wu, and L. Tan, "Holographic interference surface: A proof of concept based on the principle of interferometry," *arXiv preprint arXiv:2509.11193*, 2025.
- [47] M. Morelli, "Timing and frequency synchronization for the uplink of an OFDMA system," *IEEE Trans. Commun.*, vol. 52, no. 2, pp. 296–306, Feb. 2004.
- [48] M. Morelli, L. Sanguinetti, and H. V. Poor, "A robust ranging scheme for OFDMA-based networks," *IEEE Trans. Commun.*, vol. 57, no. 8, pp. 2441–2452, Aug. 2009.