Documentation for z80 Mainframe

Colton Beck

January 30, 2019

Legal Information

Disclaimer of Warranty

THERE IS NO WARRANTY FOR THE PROGRAM, TO THE EXTENT PERMITTED BY APPLICABLE LAW. EXCEPT WHEN OTHERWISE STATED IN WRITING THE COPYRIGHT HOLDERS AND/OR OTHER PARTIES PROVIDE THE PROGRAM "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. THE ENTIRE RISK AS TO THE QUALITY AND PERFORMANCE OF THE PROGRAM IS WITH YOU. SHOULD THE PROGRAM PROVE DEFECTIVE, YOU ASSUME THE COST OF ALL NECESSARY SERVICING, REPAIR OR CORRECTION.

Limitation of Liability

IN NO EVENT UNLESS REQUIRED BY APPLICABLE LAW OR AGREED TO IN WRITING WILL ANY COPYRIGHT HOLDER, OR ANY OTHER PARTY WHO MODIFIES AND/OR CONVEYS THE PROGRAM AS PERMITTED ABOVE, BE LIABLE TO YOU FOR DAMAGES, INCLUDING ANY GENERAL, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES ARISING OUT OF THE USE OR INABILITY TO USE THE PROGRAM (INCLUDING BUT NOT LIMITED TO LOSS OF DATA OR DATA BEING RENDERED INACCURATE OR LOSSES SUSTAINED BY YOU OR THIRD PARTIES OR A FAILURE OF THE PROGRAM TO OPERATE WITH ANY OTHER PROGRAMS), EVEN IF SUCH HOLDER OR OTHER PARTY HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

Dedication

Dedicated to caffeine for giving me the energy to write this and sleep deprivation for making me think this was a good idea.

Contents

1 Main Board **1**

2 Dot Matrix Printer **3**

3 Card Punch & Reader **5**

4 Paper Tape Punch & Reader **7**

A Part List **9**

B Code Listings **11**
B.1 ROM Listing 11
B.2 Line Printer Driver Listing 13
B.3 Card Punch Driver Listing 15
B.4 Card Reader Driver Listing 17
B.5 Paper Tape Punch Driver Listing 19
B.6 Paper Tape Reader Driver Listing 21

C Circuit Diagrams **23**
C.1 Main Board 23
C.2 Line Printer Driver Board 25
C.3 Card Punch & Reader Driver Board 27
C.4 Paper Tape Punch & Reader Driver Board 29

D PCB Masks **31**
D.1 Main Board 31
D.2 Line Printer Driver Board 33
D.3 Card Punch & Reader Driver Board 35
D.4 Paper Tape Punch & Reader Driver Board 37

E Part Drawings **39**

Bibliography **41**

List of Figures

2.1 Driver Board to Printer Timing 3
2.2 Main Bus to Printer Driver Timing 3

List of Tables

Chapter 1

Main Board

The system is designed to use one higher wattage powersupply to provide the low voltage for the peripherals and main board. For the system as shown here, the supply should be rated at least seven amperes at five volts and fifteen amperes at twelve volts for a combined two hundred fifteen watts of total power. If additional peripherals are expected to be added, then the power suppy should be of a higher wattage so that the whole system can be powered from a unified supply to avoid the risk of ground loops that could induce exxecive noise.

For the rear panel connections, any connectors may be used but it is advised to use incompatable connectors for the low voltage and high voltage connections to avoid accidental interconnection. For this reason, the parts list specifies NEMA L5-15 plugs and recepticals for the high voltage and NEMA L5-20 plugs and recepticals for the low voltage(See Table A on pg 9)

The z80 mainframe was designed to be modular and expandable. It acomplishes this by having a simple interface that brings out the lines from the main bus necessary for IO control and direct memory access. The system is limited to 232 connected peripherals because of the limitations of the z80's IO addressing technique. The z80 only uses the lower 8 bits of the address bus for IO addressing while the contents of the accumulator are placed on the upper 8 bits in teh case of the IN A,(n) instruction[1, p. 295]

Chapter 2

Dot Matrix Printer

The main output for the z80 mainframe is the printer. This particular setup is designed to use an Epson LX-810 printer interfacing over a parallel port as shown in figure (null pointer).



Figure 2.1: Driver Board to Printer Timing

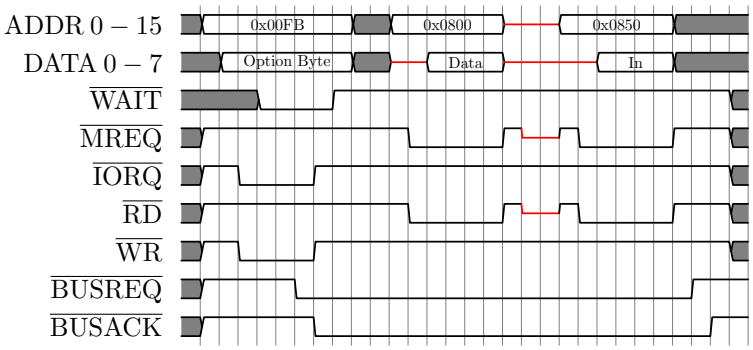

Figure 2.2: Main Bus to Printer Driver Timing

Chapter 3

Card Punch & Reader

Chapter 4

Paper Tape Punch & Reader

Appendix A

Part List

Source	Part Number	Description	Quantity	Price/each	Line Total
McMaster	7162K29	L5-15P Cable Mount	1	$9.15	$9.15
McMaster	7162K32	L5-15R Cable Mount	2	$16.29	$32.58
McMaster	7162K8	L5-15P Panel Mount	2	$12.06	$24.12
McMaster	7162K77	L5-15R Panel Mount	1	$16.00	$9.15
McMaster	7162K36	L5-20P Cable Mount	5	$11.59	$57.95
McMaster	7162K38	L5-20R Cable Mount	5	$18.00	$90.00
McMaster	7162K9	L5-20P Panel Mount	3	$14.65	$43.95
McMaster	7162K94	L5-20R Panel Mount	5	$20.59	$102.95
McMaster	7422K22	16/3 SJOOW Cable	70	$0.72/ft	$50.40
Mouser	ATMEGA328	8-bit Microcontroler	5	$1.96	$9.80
Mouser	Z84C0010PEG	CMOS Z80 CPU	1	$5.36	$5.36
Mouser	AT28C64B-15PU	8Kx8 EEPROM	1	$3.13	$3.13
Mouser	71256SA12TPG	32Kx8 SRAM	2	$3.13	$6.26
MFN	PN	Desc	0	$0.00	$0.00

Appendix B

Code Listings

B.1 ROM Listing

B.2 Line Printer Driver Listing

```
char header[]={0x00,0x1B,0x40,0x1B,0x52,0x00,0x1B,
               0x74,0x01,0x1B,0x36,0x12,0x1B,0x50};
void setup() {
  // put your setup code here, to run once:
  Serial.begin(2400);
  pinMode(2,OUTPUT);
  pinMode(3,OUTPUT);
  pinMode(4,OUTPUT);
  pinMode(5,OUTPUT);
  pinMode(6,OUTPUT);
  pinMode(7,OUTPUT);
  pinMode(8,OUTPUT);
  pinMode(9,OUTPUT);
  pinMode(10,OUTPUT);
  pinMode(11,INPUT);
  digitalWrite(10,HIGH);
  for(int i=0; i<sizeof(header);i++)
  {
    for(int j=0;j<8;j++)
    {
      if(((header[i]>>j)&1)==1)
      {
        digitalWrite(j+2,HIGH);
      }
      else
      {
        digitalWrite(j+2,LOW);
      }
    }
    delayMicroseconds(10);
    digitalWrite(10,LOW);
    delayMicroseconds(10);
    digitalWrite(10,HIGH);
    while(digitalRead(11)==HIGH){};
  }
  Serial.println("Ready...");
}
int feed = 0;
void serialEvent()
{
  char data=Serial.read();
  for(int j=0;j<8;j++)
    {
```

```
44        if(((data>>j)&1)==1)
45        {
46          digitalWrite(j+2,HIGH);
47        }
48        else
49        {
50          digitalWrite(j+2,LOW);
51        }
52      }
53      delayMicroseconds(10);
54      digitalWrite(10,LOW);
55      delayMicroseconds(10);
56      digitalWrite(10,HIGH);
57      Serial.print(data);
58      if(data == 0x0d){feed++;Serial.println();};
59      if(data != 0x0d){feed=0;};
60      if(feed >= 3){
61        feed=0;
62        data = 0x0c;
63        for(int j=0;j<8;j++)
64        {
65          if(((data>>j)&1)==1)
66          {
67            digitalWrite(j+2,HIGH);
68          }
69          else
70          {
71            digitalWrite(j+2,LOW);
72          }
73        }
74        delayMicroseconds(10);
75        digitalWrite(10,LOW);
76        delayMicroseconds(10);
77        digitalWrite(10,HIGH);
78      }
79      while(digitalRead(11)==HIGH){};
80  }
81
82  void loop() {
83    // put your main code here, to run repeatedly:
84
85  }
```

B.3 Card Punch Driver Listing

B.4 Card Reader Driver Listing

B.5 Paper Tape Punch Driver Listing

B.6 Paper Tape Reader Driver Listing

Appendix C

Circuit Diagrams

C.1 Main Board

C.2 Line Printer Driver Board

C.3 Card Punch & Reader Driver Board

C.4 Paper Tape Punch & Reader Driver Board

Appendix D

PCB Masks

D.1 Main Board

D.2 Line Printer Driver Board

D.3 Card Punch & Reader Driver Board

D.4 Paper Tape Punch & Reader Driver Board

Appendix E

Part Drawings

Bibliography

[1] Zilog, Inc. *z80 CPU*, 8 2016. Rev. 11.

Fonts

This was typeset in Computer Modern using pdfLaTeX and bibTeX. The timing diagrams were made with the tikz-timing package. The code listings were made with the listings package