Heart BioAmp Candy

Candy-sized sensor for recording ElectroCardioGraphy (ECG) signals

Overview

Heart BioAmp Candy is a candy-sized sensor for recording ECG signals easily. It is perfect for students and researchers as it offers reliable and accurate ECG recordings, making heart monitoring accessible and convenient for educational and research purposes.

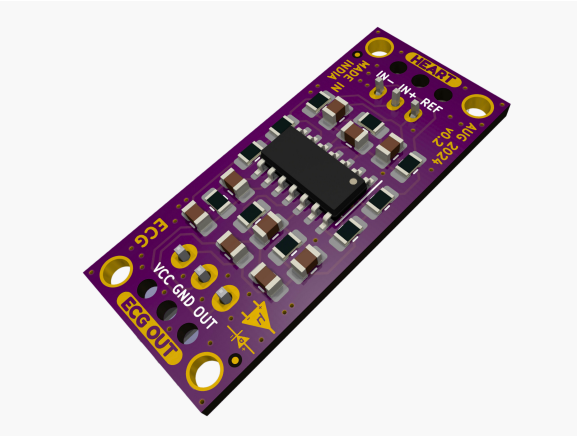

Specifications

Input Voltage	2.7 V - 5 V
Fixed Gain	x2157
Bandpass Filter	0.5 - 34 Hz
Compatible Hardware	Any development board with an ADC (Arduino UNO R3/R4, Arduino Nano, Adafruit QtPy, STM32 Blue Pill, BeagleBone Black, Raspberry Pi Pico, to name just a few) or any standalone ADC of your choice
BioPotentials	ECG
No. of Channels	1
Electrodes	3 (Positive, Negative, and Reference)
Dimensions	3.5 x 1.5 cm
Open Source	Hardware + Software

Contents

1 Heart BioAmp Candy
- 1.1 Overview . . . 1
- 1.2 Specifications . . . 1
- 1.3 Hardware . . . 3
- 1.4 Contents of the kit . . . 5
- 1.5 Software requirements . . . 5
- 1.6 Using the kit . . . 6
  - 1.6.1 Step 1: Connections with development board . . . 6
  - 1.6.2 Step 2: Connecting electrode cable . . . 7
  - 1.6.3 Step 3: Skin Preparation . . . 7
  - 1.6.4 Step 4: Measuring ECG (ElectroCardioGraphy) . . . 7

2 Skin Preparation Guide
- 2.1 Why skin preparation is important? . . . 11
- 2.2 Kit Contents . . . 11
- 2.3 Steps to follow . . . 11
  - 2.3.1 Step 1: Identify the targeted area . . . 11
  - 2.3.2 Step 2: Apply NuPrep gel . . . 14
  - 2.3.3 Step 3: Clean the skin surface . . . 14
  - 2.3.4 Step 4: Wipe off the gel . . . 14
  - 2.3.5 Step 5: Measuring the signals . . . 16

3 Using BioAmp Bands
- 3.1 Overview . . . 19
- 3.2 Why use BioAmp Bands? . . . 19
- 3.3 Types of BioAmp Bands . . . 19
  - 3.3.1 1. Muscle BioAmp Band . . . 19
  - 3.3.2 2. Heart BioAmp Band . . . 20
  - 3.3.3 3. Brain BioAmp Band . . . 21
- 3.4 Using Muscle BioAmp Band . . . 21
  - 3.4.1 Assembly . . . 21
  - 3.4.2 Skin Preparation . . . 24
  - 3.4.3 Measure EMG . . . 24
- 3.5 Using Heart BioAmp Band . . . 26
  - 3.5.1 Skin Preparation . . . 26
  - 3.5.2 Assembly . . . 26
  - 3.5.3 Measure ECG . . . 26
- 3.6 Using Brain BioAmp Band . . . 29
  - 3.6.1 Assembly . . . 29
  - 3.6.2 Skin Preparation . . . 29
  - 3.6.3 Measure 1-channel EEG . . . 29

1 Heart BioAmp Candy

1.3 Hardware

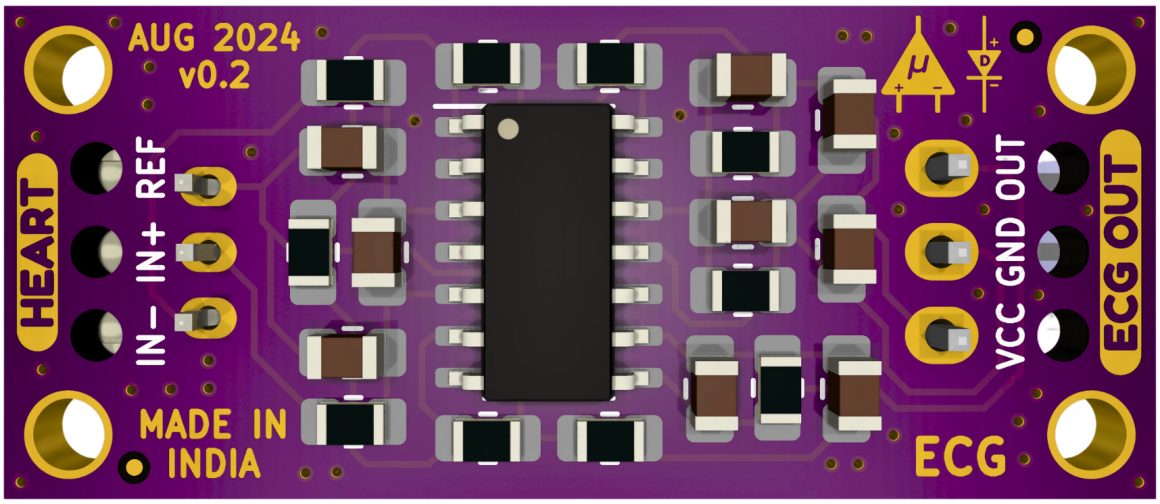

Fig. 1: Assembled PCB Render - Front

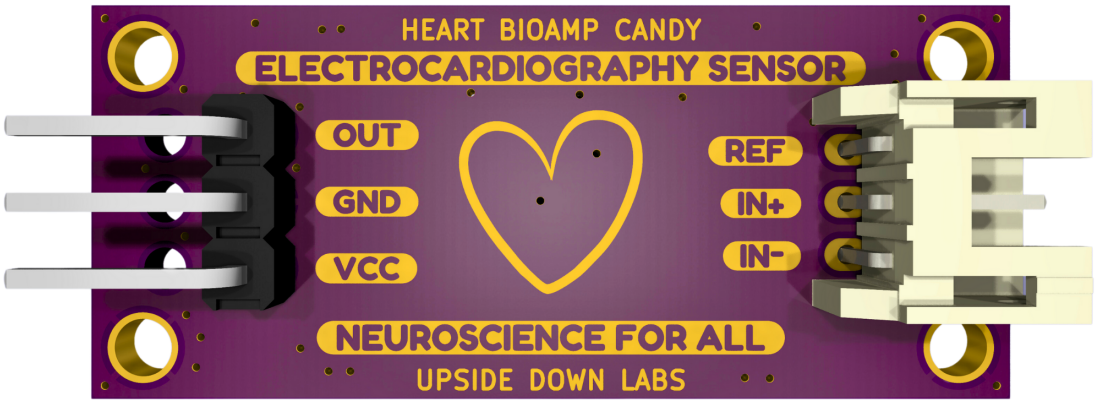

Fig. 2: Assembled PCB Render - Back

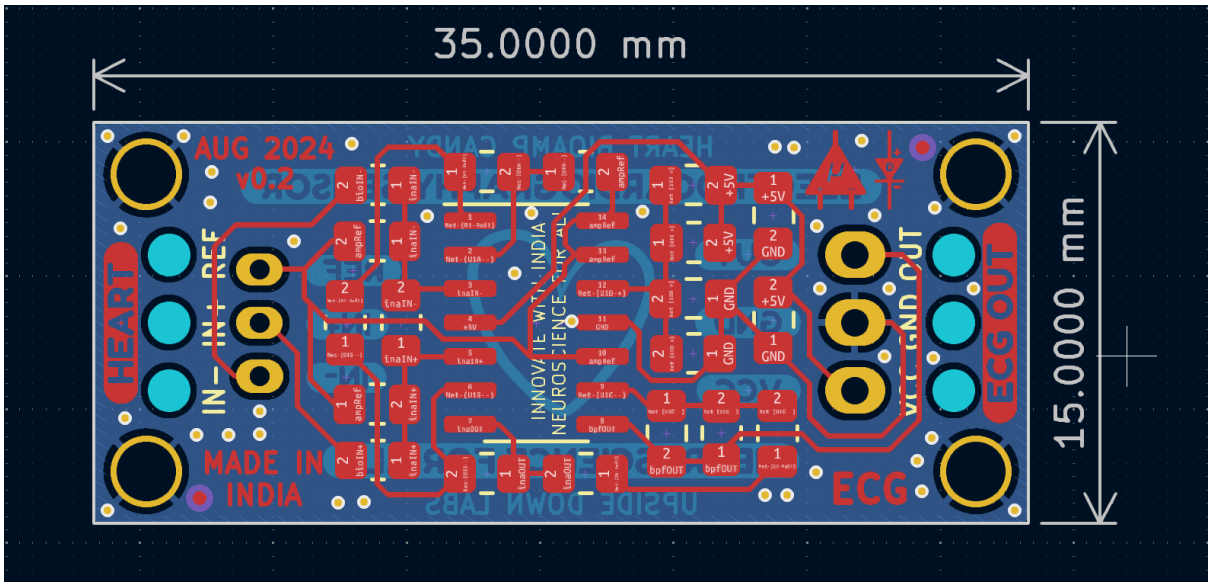

Fig. 3: PCB Layout

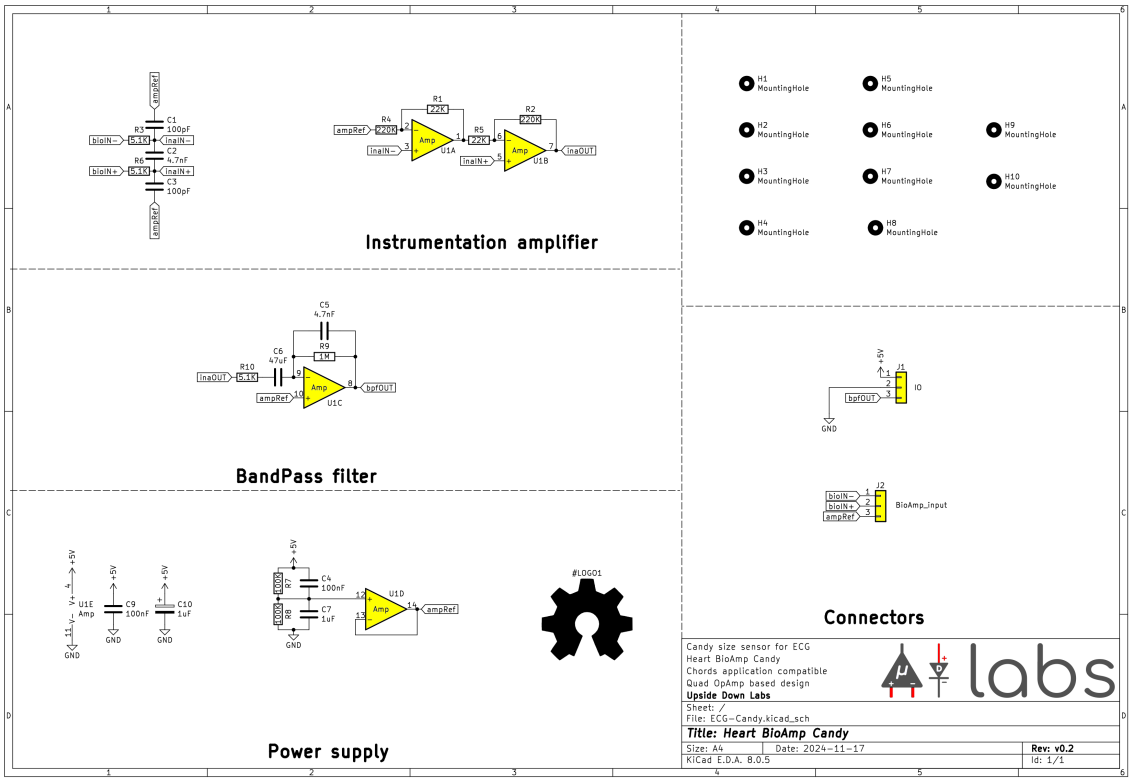

Fig. 4: Schematic Diagram

1.4 Contents of the kit

Content of the kit	Qty
Heart BioAmp Candy	1
BioAmp Cable v3 (100cm)	1
Jumper cables (pack of 3)	1
Heart BioAmp Band (ECG Band)	1
Gel electrodes	12

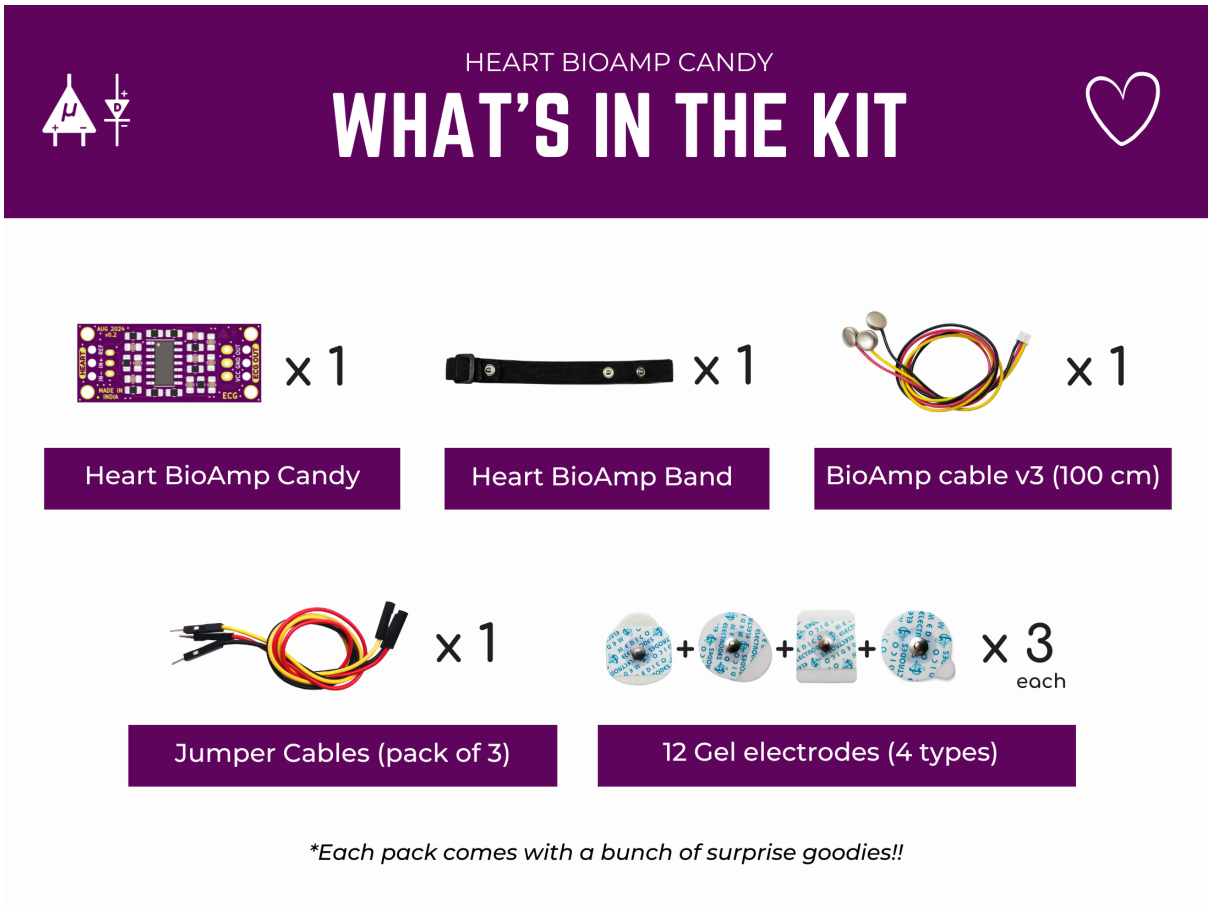

1.5 Software requirements

1. **Uploading the code:** Before you start using the kit, please download Arduino IDE. Using this you'll be able to upload the Chords Arduino Firmware on your development board.
2. **Visualizing the signals:** After uploading the firmware, you can use Chords, an open-source web application developed by us to record and visualize real-time biopotential signals (ECG, EMG, EEG, EOG).

1.6 Using the kit

1.6.1 Step 1: Connections with development board

Connect your Heart BioAmp Candy to your MCU/ADC as per the connection table shown below:

Heart BioAmp Candy	MCU/ADC
VCC	5V
GND	GND
OUT	ADC Input

While making connections with the development board, make sure to use jumper cables that are provided in the kit.

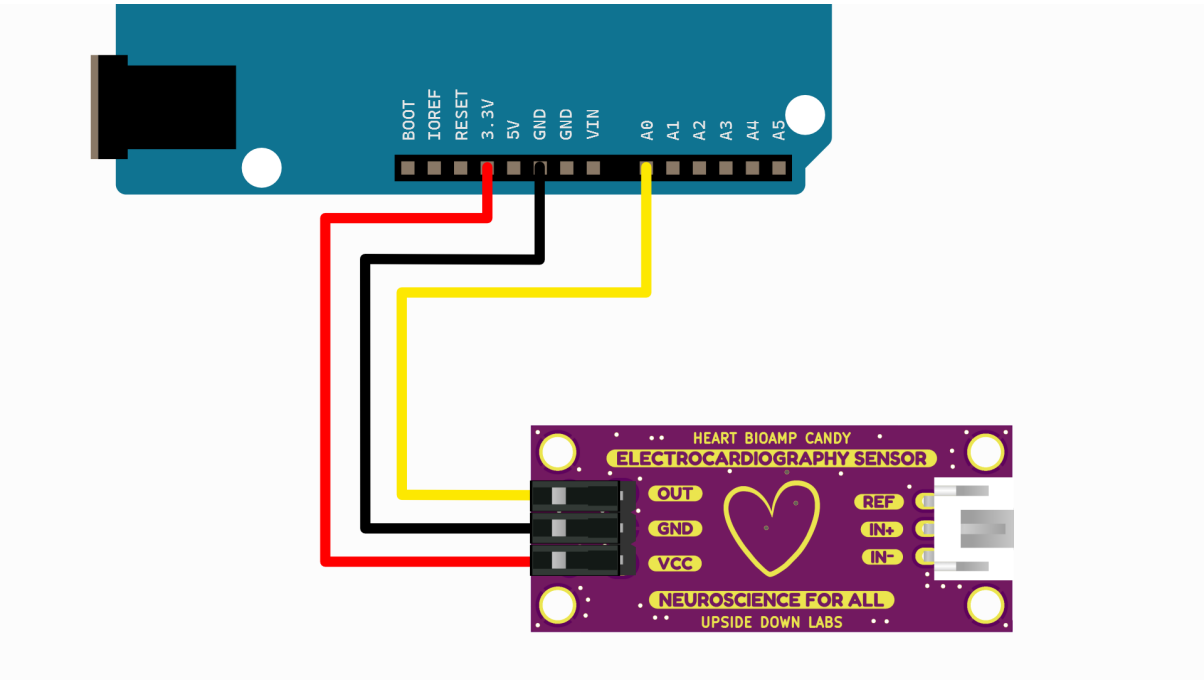

Fig. 5: Heart BioAmp Candy - Development board connection

Note

For demonstration purposes we are showing connections of the sensor with Arduino UNO R3/R4 but you can use any other development board or a standalone ADC of your choice.

Warning

Take precautions while connecting to power, if power pins (GND & VCC) are to be swapped, your sensor will be fried and it'll become unusable (DIE).

1.6.2 Step 2: Connecting electrode cable

Connect the BioAmp cable to Heart BioAmp Candy by inserting the cable end in the JST PH connector as shown.

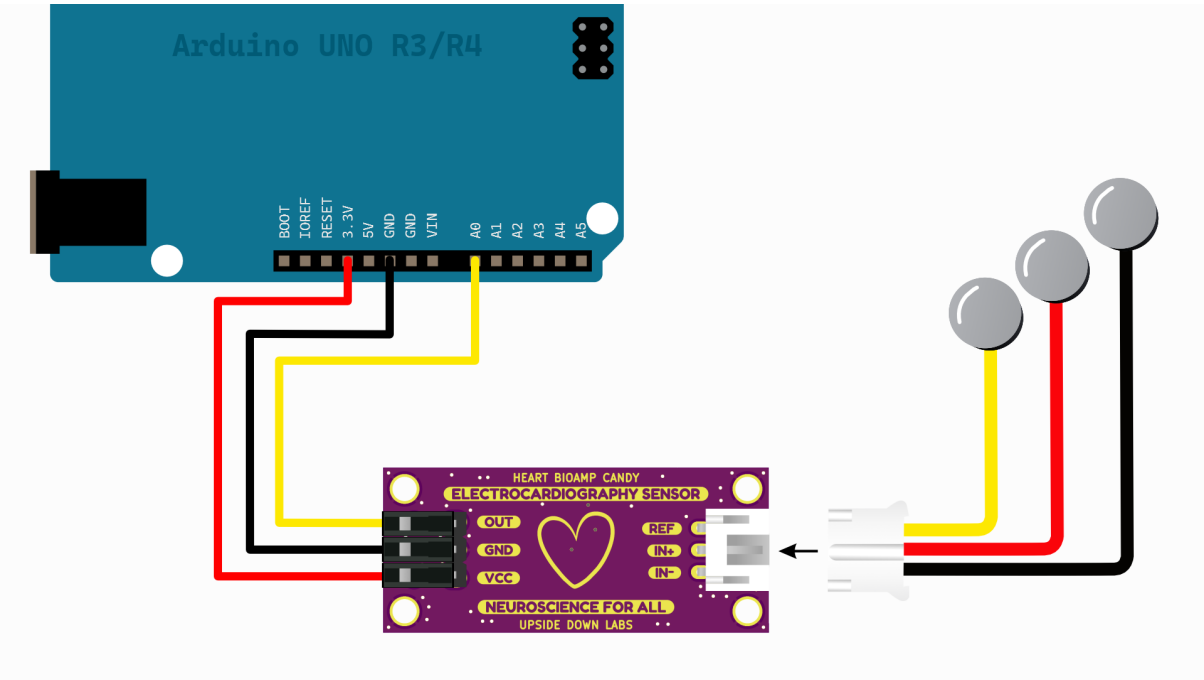

Fig. 6: Heart BioAmp Candy - Electrode cable connections

1.6.3 Step 3: Skin Preparation

Apply Nuprep Skin Preparation Gel on the skin surface where electrodes would be placed to remove dead skin cells and clean the dirt from skin. After rubbing the skin surface thoroughly, clean it with an alcohol wipe or a wet wipe.

For more information, please check out detailed step-by-step *Skin Preparation Guide*.

1.6.4 Step 4: Measuring ECG (ElectroCardioGraphy)

Electrodes placement

We have 2 options to measure the ECG signals, either using the gel electrodes or using dry electrode based Heart BioAmp Band. You can try both of them one by one.

Using gel electrodes:

1. Connect the BioAmp cable to gel electrodes,
2. Peel the plastic backing from electrodes
3. Place the IN+,IN- and REF as shown in the connection diagram.

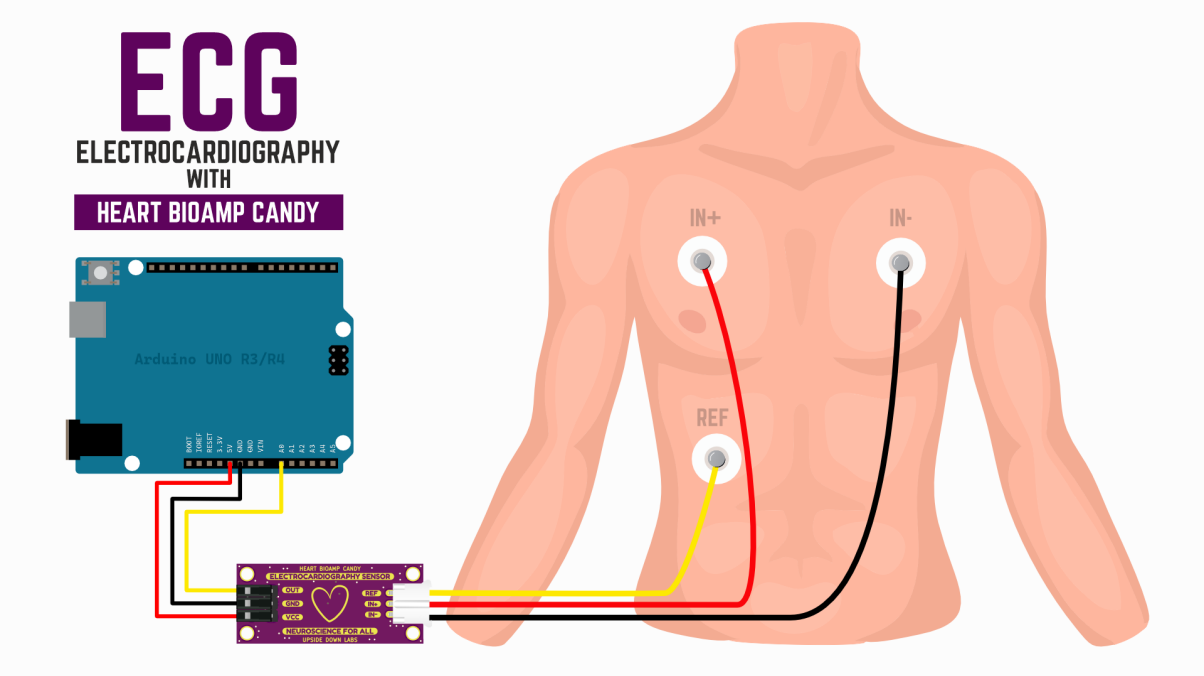

Fig. 7: Using Heart BioAmp Candy to measure ECG with gel electrodes

Using Heart BioAmp Band:

1. Snap the IN- cable on the left side, IN+ in the middle, and REF on the far side of the band.
2. Now put a small drop of electrode gel between the skin and metallic part of BioAmp cable to get the best results.

Tip

Visit the complete documentation on how to *assemble and use the BioAmp Bands* or follow the youtube tutorial video.

Uploading the firmware

Connect the development board to your laptop using a compatible USB cable. Copy paste the Chords Arduino Firmware in Arduino IDE.

Note

Upload the Arduino firmware according to the development board you are using. If you are using Arduino UNO R3 then you should upload UNO-R3 firmware but if you are using Arduino UNO R4 then make sure to upload the UNO-R4 firmware.

Now go to `tools` from the menu bar, select `board` option then select the right board name according to the development board you are using. In the same menu, select the COM port on which your board is connected. To find out the right COM port, disconnect your board and reopen the menu. The entry that disappears should be the right COM port. Now upload the code.

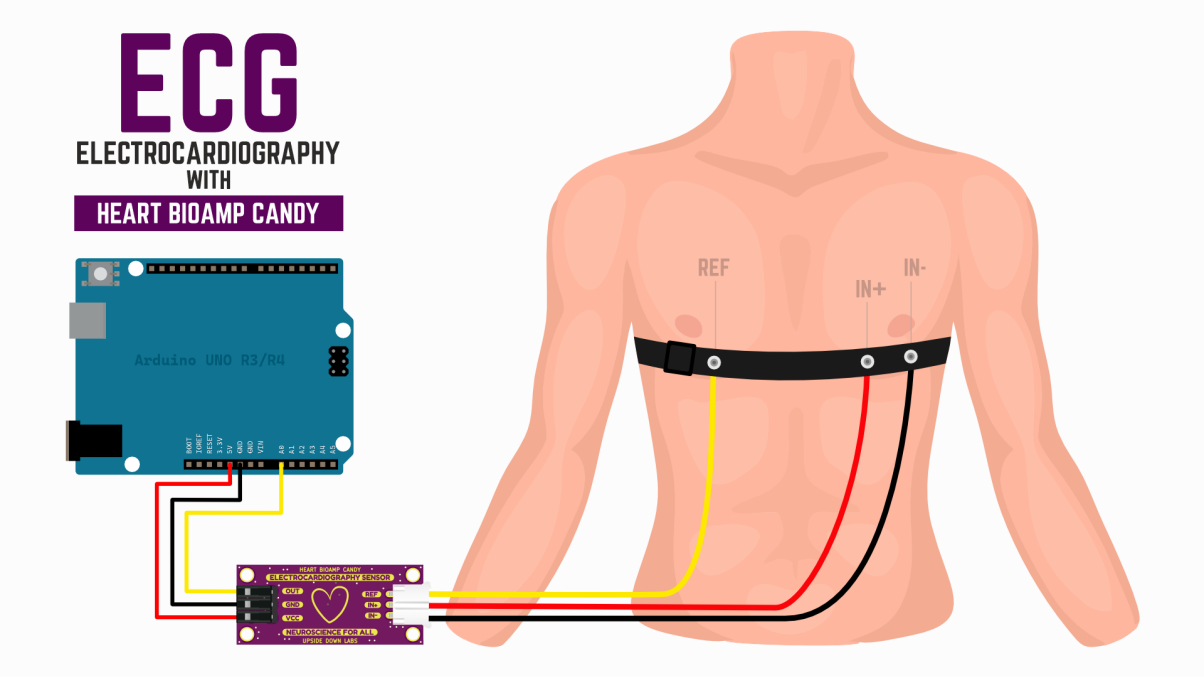

Fig. 8: Using Heart BioAmp Candy to measure ECG with Heart BioAmp Band

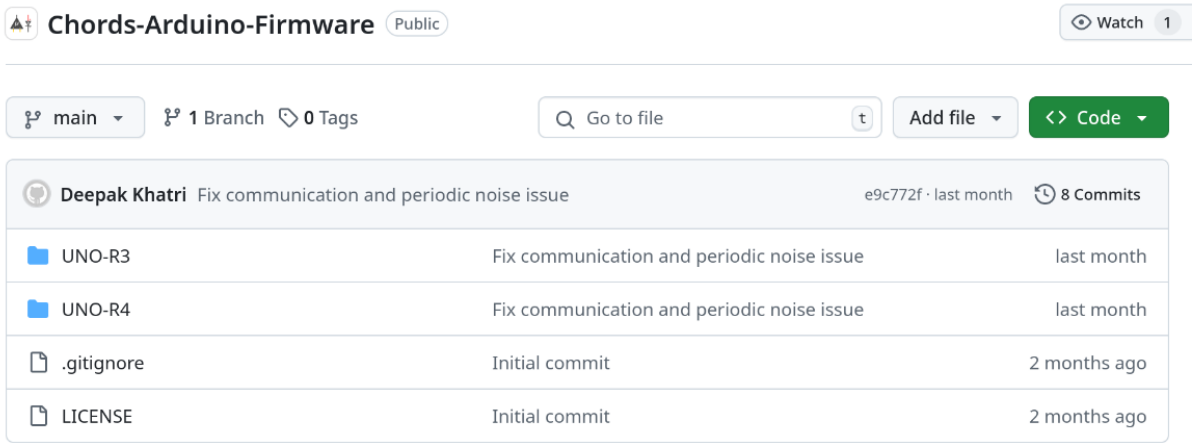

Fig. 9: Chords Arduino firmware

Warning

Make sure your laptop is not connected to a charger and sit 5m away from any AC appliances for best signal acquisition.

Visualizing the ECG signals using Chords

1. Visit Chords application website.
2. Click on `visualize now`.
3. Click on `connect`.
4. Select the correct COM port in the pop-window and click on `connect` to connect your development board to Chords.
5. You will be able to see your ECG signals on the screen.

ECG signals measured using Heart BioAmp Candy

Note

For more information, visit the complete documentation of the Chords application.

2 Skin Preparation Guide

2.1 Why skin preparation is important?

Proper skin preparation is crucial before recording any biopotential signal be it Electrocardiography (ECG), Electromyography (EMG), Electroencephalography (EEG), or Electrooculography (EOG).

- `Clean skin surface:` Removes dead skin cells, oils, & other substances that increases skin impedance.
- `Improve impedance:` Improves the conduction of electrical signals from the body to the recording equipment and minimizes impedance.
- `Electrode-skin contact:` Ensures optimal contact between the electrodes and the skin surface.
- `Signal quality:` Enhances the overall quality of recorded signals, providing clear & reliable data for analysis & improves the ability to capture subtle variations in biopotential signals.
- `Consistency in recordings:` Reduces variability in signal quality, making it easier to make any Human-Computer Interface (HCI), Brain-Computer Interface (BCI) project or a real-world application.
- `Long term adhesion:` Facilitates long-term adhesion & stable placement of electrodes to the skin during extended signal monitoring.

2.2 Kit Contents

Nuprep gel	Mildly abrasive, highly conductive gel that should be applied before placing the electrodes on the skin to improve signal quality & enhances the performance of monitoring electrodes.
Electrode Gel	Highly conductive gel that acts as a coupling agent between dry electrodes and the skin to aid the transmission of biopotential signals like ECG, EMG, EOG, or EEG.
Ten20 paste	Contains the right balance of adhesiveness and conductivity, enabling the dry electrodes to remain in place while allowing the transmittance of biopotential signals.
Alcohol Swabs/Wet wipes	Soft & non-woven pads that helps in cleaning the skin surface and does not leave any residue.
Cotton Swabs	Useful while applying nuprep gel or ten20 paste.

2.3 Steps to follow

You can follow the steps given below to do the skin preparation properly:

2.3.1 Step 1: Identify the targeted area

Identify the target area where the gel electrodes or BioAmp Bands will be placed for recording the biopotential signals.

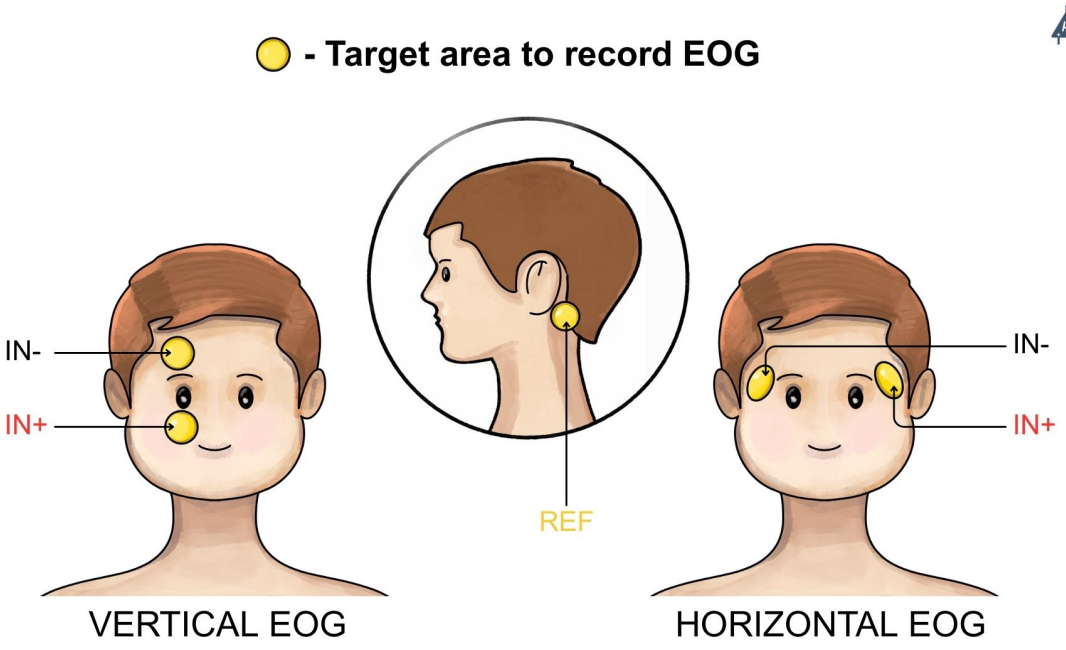

Fig. 1: Target area to record EOG

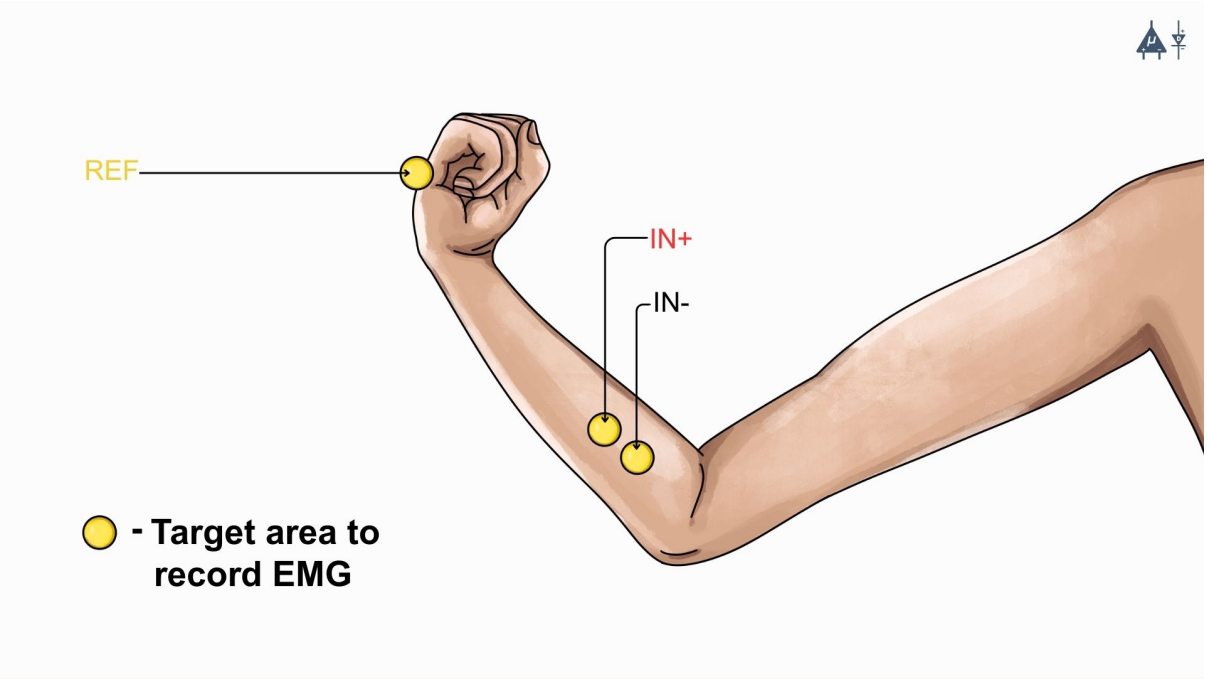

Fig. 2: Target area to record EMG

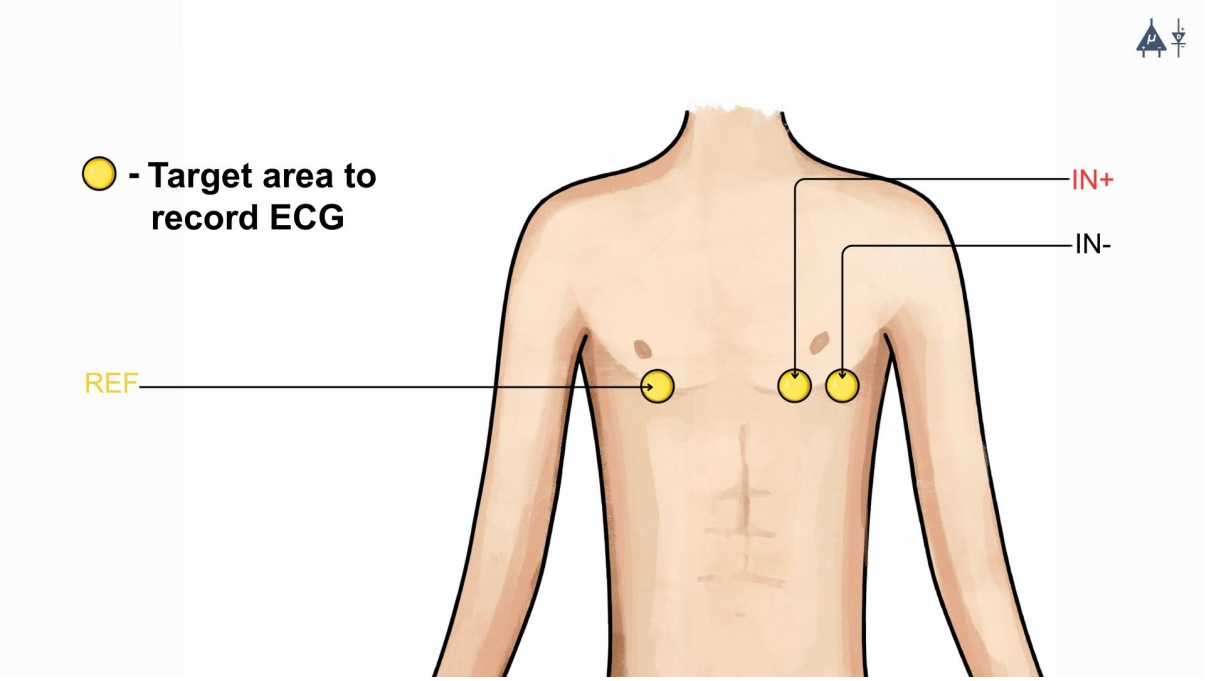

Fig. 3: Target area to record ECG

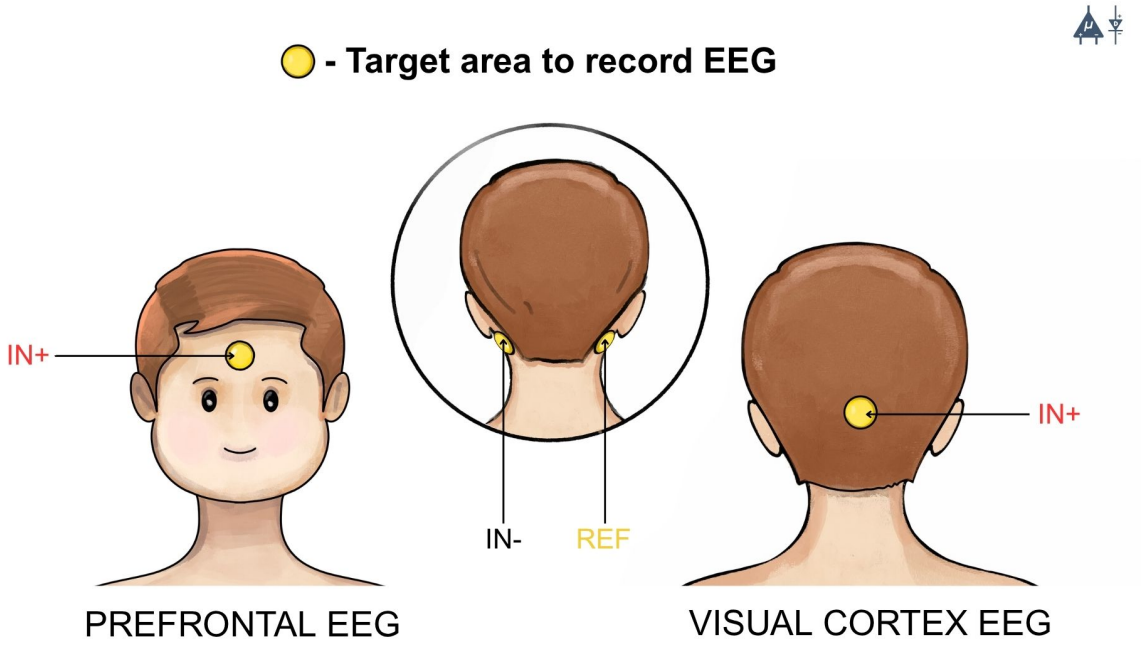

Fig. 4: Target area to record EEG

2.3.2 Step 2: Apply NuPrep gel

Take a small amount of NuPrep gel using a cotton swab and apply it on your targeted area.

2.3.3 Step 3: Clean the skin surface

Use gentle, circular motions to rub the gel on the skin surface. This removes all the dead skin cells & improves conductivity.

Warning

Do not rub the gel for too long as it has abrasive properties and may cause skin redness and irritation.

2.3.4 Step 4: Wipe off the gel

Wipe away excess gel with alcohol swabs or wet wipes.

Warning

- Using alcohol swabs can dry out the skin, so don't use them if your skin is already dry.
- Close your eyes while using the alcohol swabs for EOG recording else it may cause eye redness & irritation.

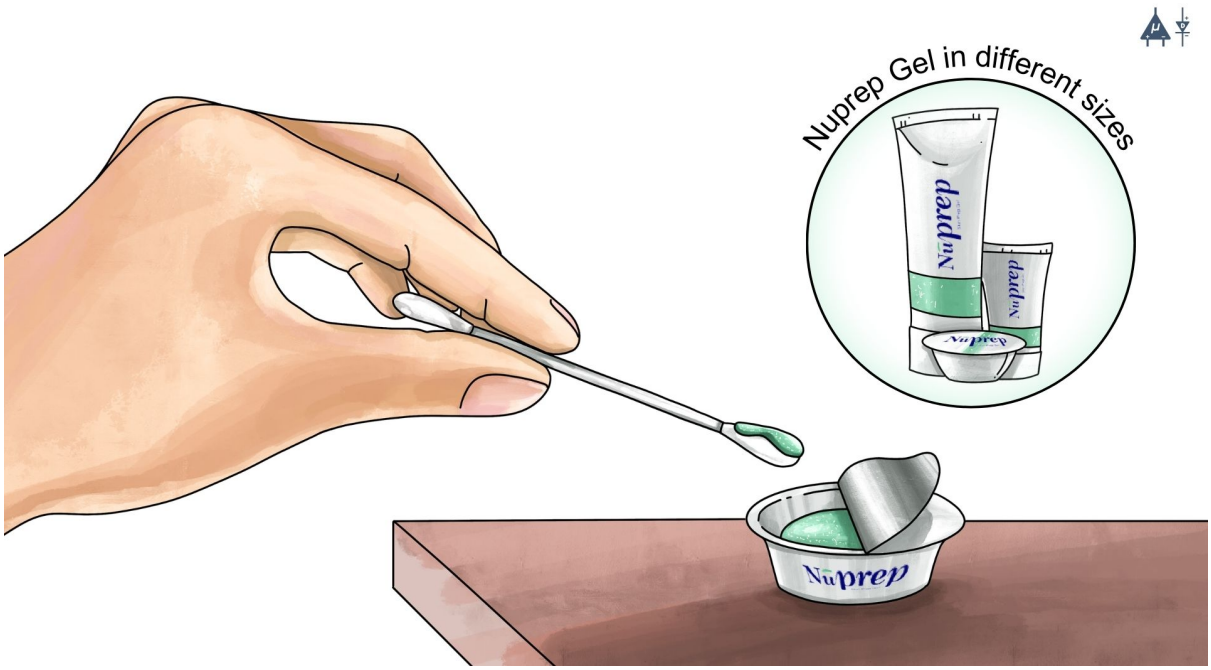

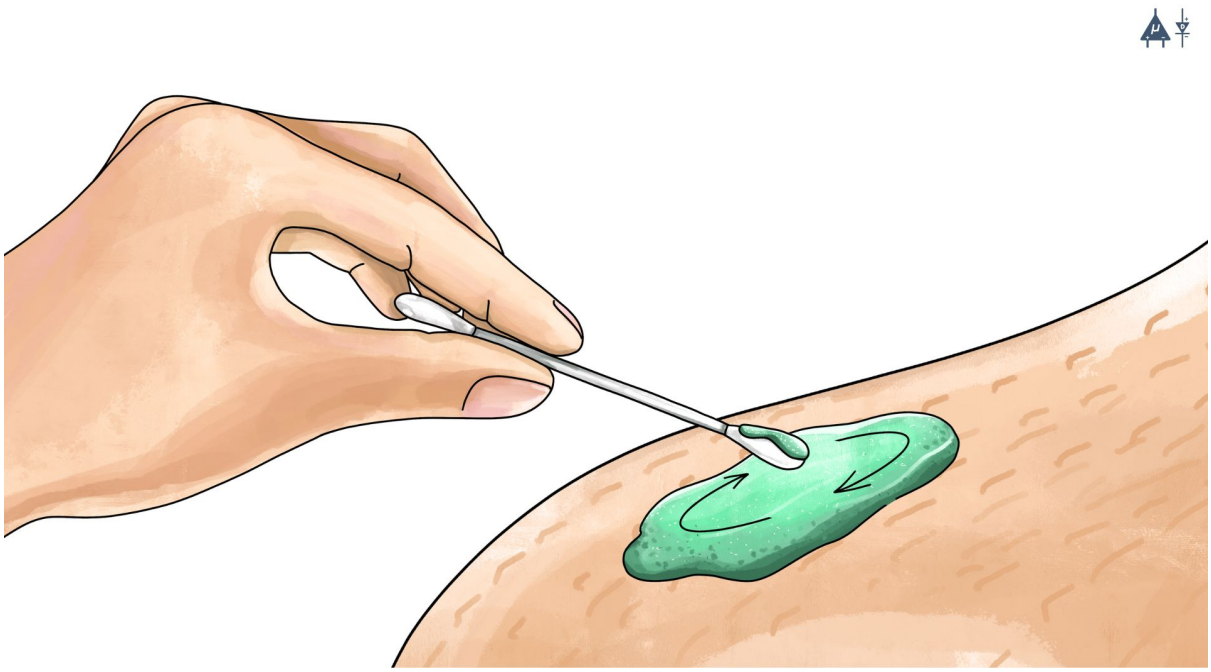

Fig. 5: Rub the gel gently using the cotton swab

Fig. 6: Wipe away excess gel

2.3.5 Step 5: Measuring the signals

Now you can either use gel electrodes or BioAmp bands for the signal recording.

Using gel electrodes

Connect the BioAmp cable to gel electrodes, peel the plastic backing from electrodes and place the IN+, IN-, REF cables according to your specific biopotential recording.

Note

While placing the gel electrodes on the skin, make sure to place the non-sticky tab of the electrode in the direction opposite to your hair growth. This allows you to remove the electrodes easily without pulling off much body hair.

Using BioAmp bands

Connect the BioAmp cable to your BioAmp band. Now apply a small amount of `electrode gel` or `Ten20 conductive paste` on the dry electrodes between the skin and metallic part of BioAmp cable. This improves the signal conductivity, enhancing overall signal quality.

Note

The above graphics demonstrates the use of electrode gel/Ten20 paste with Muscle BioAmp Band. Similarly you can use Brain BioAmp Band and Heart BioAmp Band. Refer to *Using BioAmp Bands* guide to assemble and use all the BioAmp Bands correctly.

Now you are all set! Make all the connections correctly and start recording your biopotential signals.

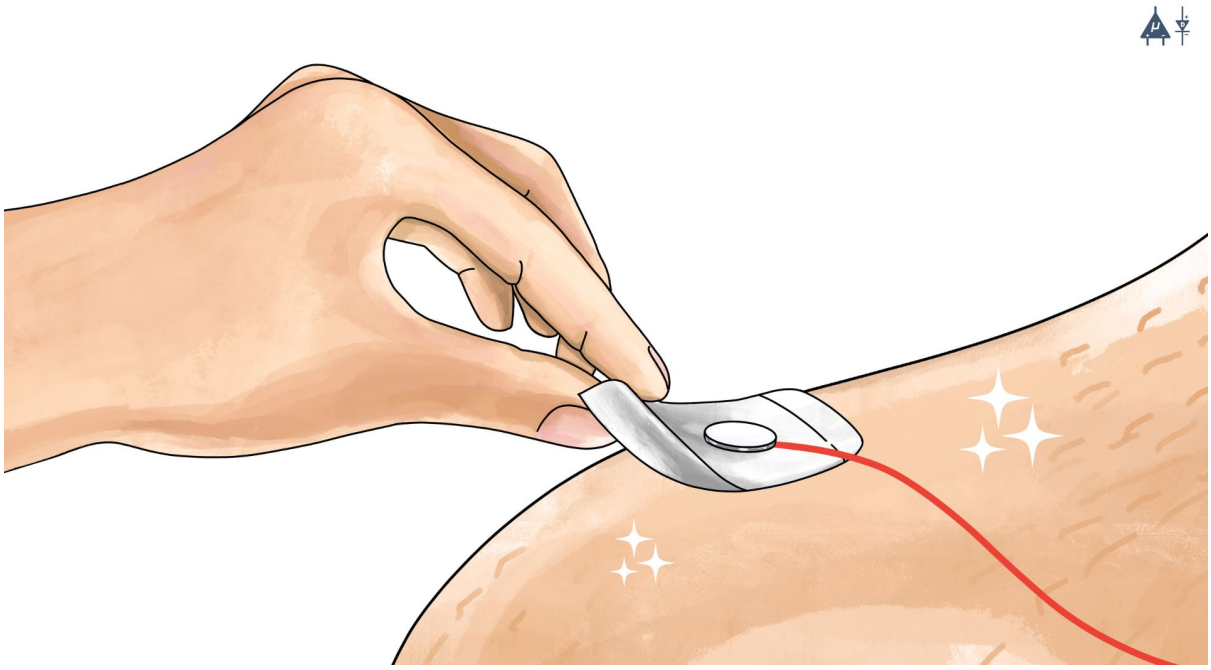

Fig. 7: Placing gel electrodes on skin surface

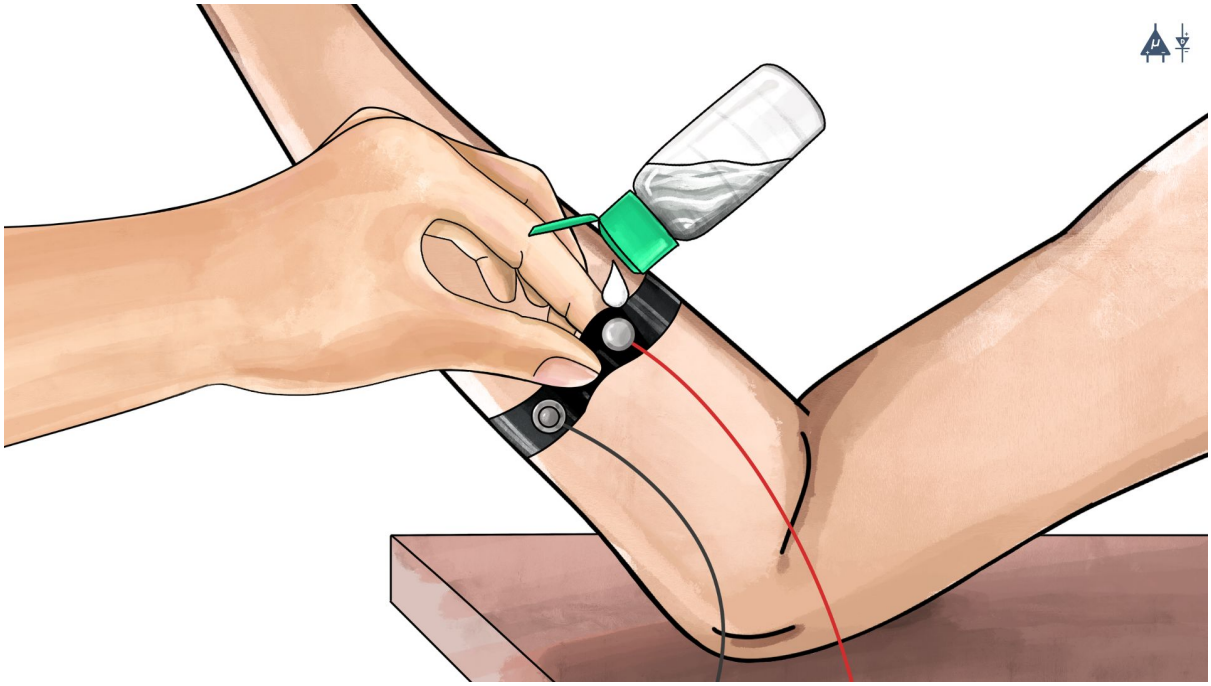

Fig. 8: Method 1: Using Electrode gel

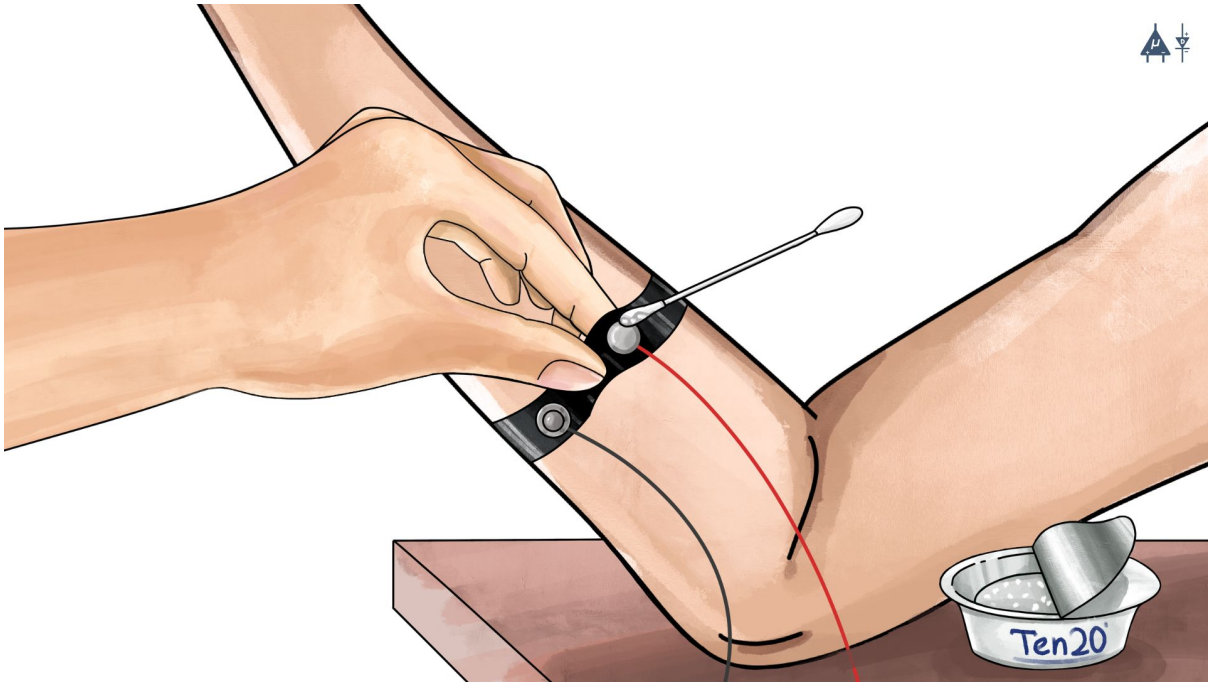

Fig. 9: Method 2: Using Ten20 paste

Warning

NuPrep gel, Ten20 paste and the alcohol swabs shouldn't be used if you have a history of skin allergies to lotions and cosmetics.

3 Using BioAmp Bands

3.1 Overview

BioAmp Bands are dry electrode-based stretchable bands that allows you to record biopotential signals from your body be it from brain (EEG), muscles (EMG) or heart (ECG). These bands can only be used with our BioAmp Hardware by making the connections using BioAmp Cable.

3.2 Why use BioAmp Bands?

Usually, people use gel electrodes to record biopotential signals from the skin surface. But, it has its own disadvantages. So we came up with these BioAmp Bands using which users can enjoy a more comfortable, cost-effective, and hassle-free experience while recording biopotential signals.

- Comfort: BioAmp Bands are generally more comfortable to wear than gel electrodes, especially for long-term recordings. They conform to the body's shape and avoid the sticky, sometimes irritating sensation of gel electrodes.
- Reusability: Unlike gel electrodes, which are often single-use and need to be replaced frequently, BioAmp Bands can be reused multiple times. This makes them more cost-effective and environmentally friendly.
- Ease of Use: These bands are easy to wear and adjust, reducing the hassle of setup and ensuring consistent placement.
- Hygiene: They can be easily cleaned and sanitized between uses, reducing the risk of skin irritation and infections. Gel electrodes, on the other hand, can leave residue on the skin surface.
- Performance: The bands can provide stable and reliable signal recordings depending on your environment conditions. For hot/humid conditions, the bands usually perform better while recording the signals. But if the weather is cold causing dry skin, then it is recommended to prepare the skin properly and apply electrode gel between the metallic part of cable and skin surface. If you feel that the skin impedence is increasing, then reapply electrode gel frequently. The other option is to use gel electrodes after preparing the skin properly.

3.3 Types of BioAmp Bands

There are 3 types of BioAmp Bands and all these bands offer targeted and efficient solutions for recording biopotential signals from the muscles, heart, and brain, making them versatile tools for a wide range of HCI/BCI applications.

3.3.1 1. Muscle BioAmp Band

Muscle BioAmp Band (EMG Band) is a stretchable band that can be connected to any of our Muscle BioAmp Hardware or any EXG sensor using a BioAmp Cable. It allows you to record your muscle signals hassle-free.

Length	13 inches
Stretchability	2X (Upto 26 inches)
Usability	Reusable as it comes with washable fabric
Interface	Snap electrodes
Compatible Hardware	Muscle BioAmp Hardware or any EXG sensor
BioPotentials	EMG
No. of channels	1
Wearable	Yes

3.3.2 2. Heart BioAmp Band

Heart BioAmp Band (ECG Band) is a stretchable band that can be connected to any of our Heart BioAmp Hardware or any EXG sensor using BioAmp Cable. It allows you to record your ECG signals hassle-free.

Length	37 inches
Stretchability	2X (Upto 74 inches)
Usability	Reusable as it comes with washable fabric
Interface	Snap electrodes
Compatible Hardware	Heart BioAmp Hardware or any EXG sensor
BioPotentials	ECG
No. of channels	1
Wearable	Yes

3.3.3 3. Brain BioAmp Band

Brain BioAmp Band (EEG Band) is a stretchable band that can be connected to any of our Brain BioAmp Hardware or any EXG sensor using BioAmp Cable to record signals from the brain hassle-free.

Length	15.5 inches
Stretchability	2X (Upto 31 inches)
Usability	Reusable as it comes with washable fabric
Interface	Snap electrodes
Compatible Hardware	Brain BioAmp Hardware or any EXG sensor
BioPotentials	EEG
No. of channels	2 or 6
Wearable	Yes

You can get either a 2-channel or a 6-channel Brain BioAmp Band according to your project or research requirements:

2-Channel Brain BioAmp Band

It can be used to record EEG signals up to 2 channels either from the visual cortex (back of your head) or the prefrontal cortex part of brain.

6-Channel Brain BioAmp Band

It can be used to record EEG signals up to 2 channels either from the visual cortex (back of your head) or the prefrontal cortex part of brain.

3.4 Using Muscle BioAmp Band

3.4.1 Assembly

1. Take your Muscle BioAmp Band, hold the side of the band that has buckle on it and align the top part of the buckle with the flat surface of the snap.
1. Take the other end of the band and insert it in the buckle.
3. Your band is now ready to use. You can also adjust the size of the band according to your targeted muscle.

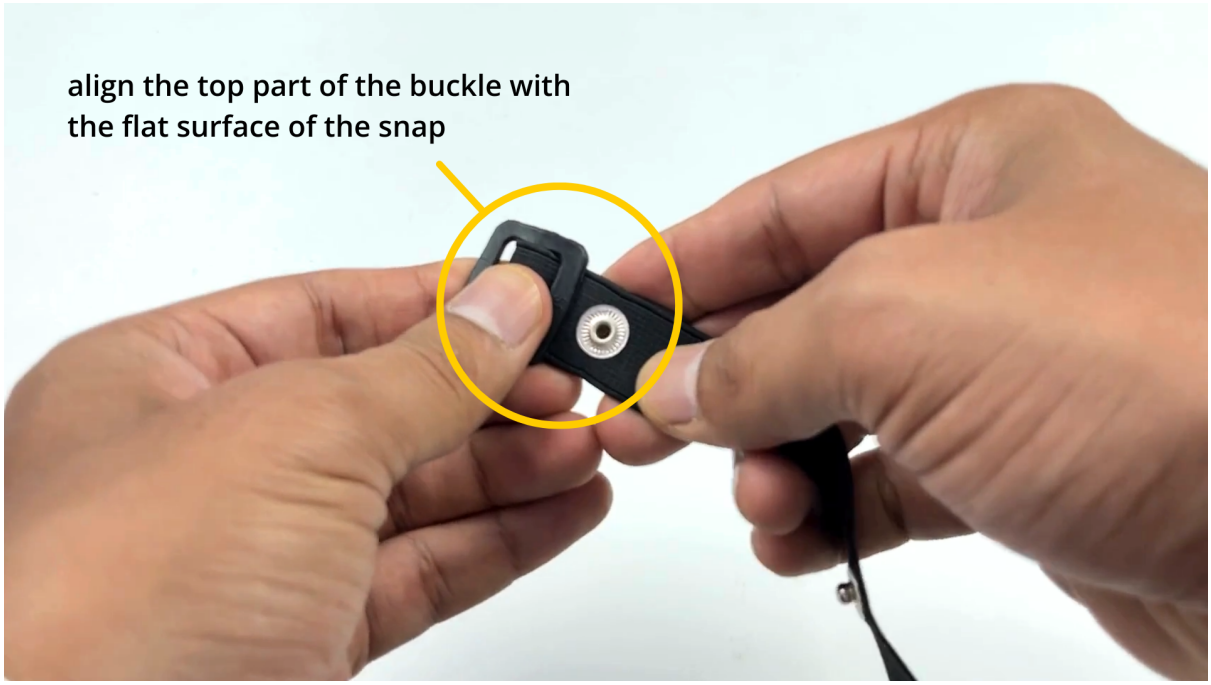
align the top part of the buckle with
the flat surface of the snap

Take other end of the band and
insert it in the buckle

Insert this end of the band into the buckle
as shown and pull it to finish the assembly

adjust the size of the band using this
loose end of the band

3.4.2 Skin Preparation

Apply Nuprep Skin Preparation Gel on the skin surface where dry electrodes would be placed to remove dead skin cells and clean the skin from dirt. After rubbing the skin surface thoroughly, clean it with an alcohol wipe or a wet wipe.

For more information, please check out detailed step by step *Skin Preparation Guide*.

3.4.3 Measure EMG

1. Flip the band and snap the dry electrodes of the BioAmp Cable on it as shown below.

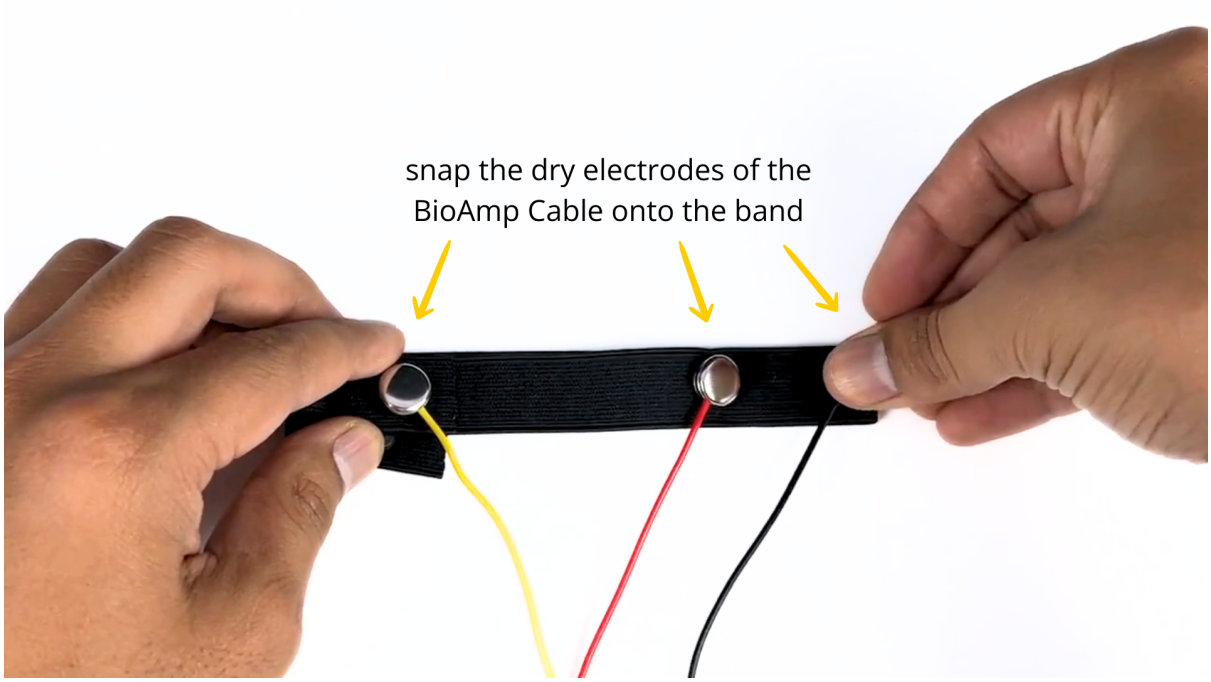

1. Flip the band again and wear it on your arm in such a way that IN+ and IN- are placed on the arm near the ulnar nerve and REF (reference) on the far side of the band.

Note

Make sure the dry electrodes (shiny parts of the BioAmp Cable) are in direct contact with the skin.

3. Now put a small amount of electrode gel or Ten20 paste between the skin and dry electrodes to get the best signal acquisition.

Note

- After using the band, don't leave the gel residue on the dry electrodes longer than an hour as it may corrode them over a period of time.
- Wash the band with liquid soap and rinse it properly after every use. Use it again only when it is completely dry.

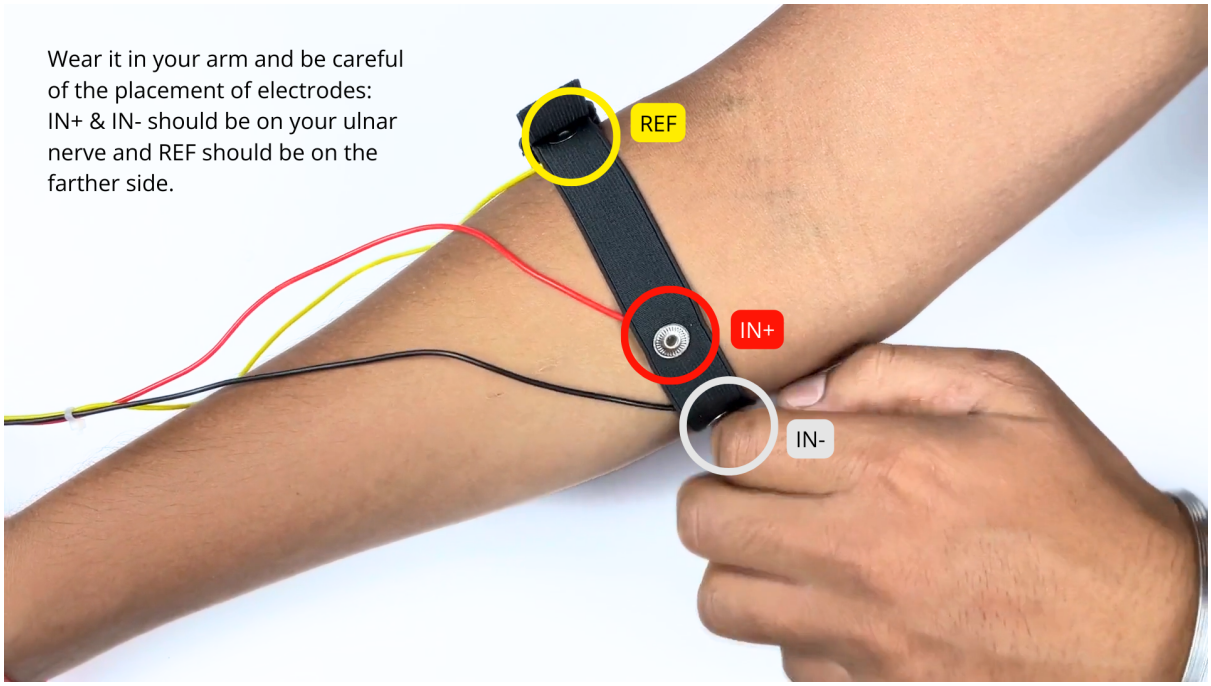
Wear it in your arm and be careful of the placement of electrodes: IN+ & IN- should be on your ulnar nerve and REF should be on the farther side.
REF
IN+
IN-

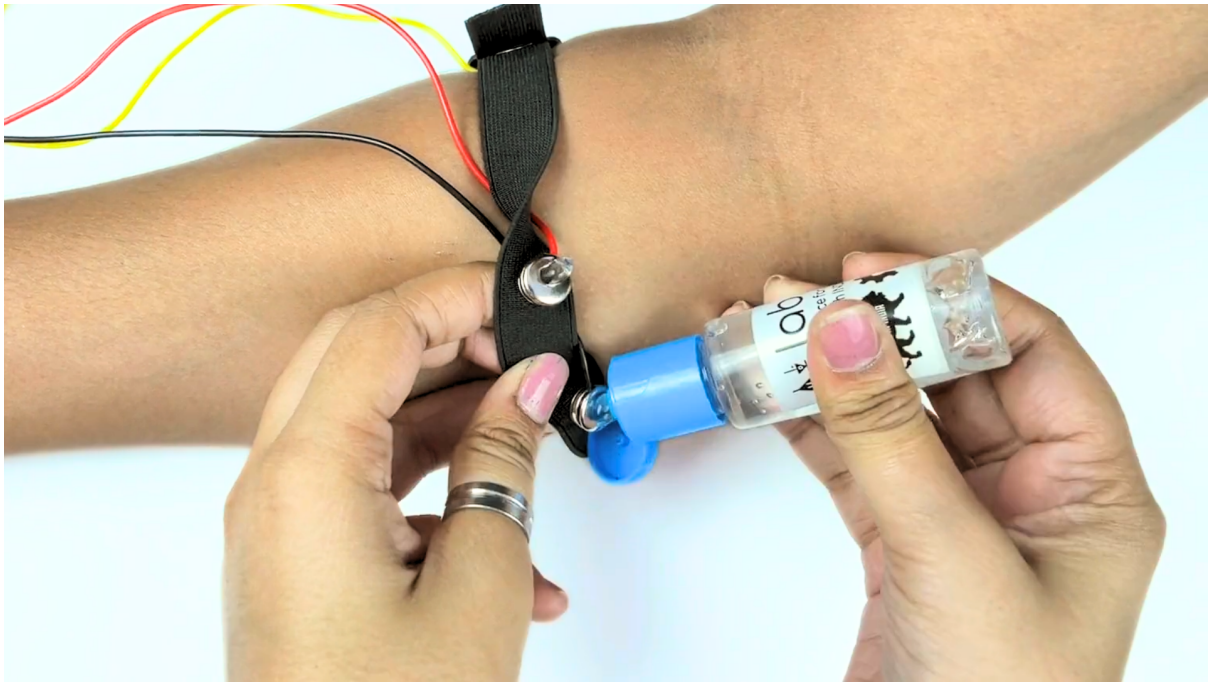

3.5 Using Heart BioAmp Band

3.5.1 Skin Preparation

Apply Nuprep Skin Preparation Gel on your chest where dry electrodes would be placed to remove dead skin cells and clean the skin from dirt. After rubbing the skin surface thoroughly, clean it with an alcohol wipe or a wet wipe.

For more information, please check out detailed step by step *Skin Preparation Guide*.

3.5.2 Assembly

1. Take your Heart BioAmp Band and wrap the band around your chest in such a way that the pointy part of the snap touches your chest and the flat part is on the outer side.

2. Now insert the loose end of the band into the buckle and tighten it by pulling the strap.
3. Your band is now ready to use. You can also adjust the size of the band according to your chest size.

3.5.3 Measure ECG

1. Snap the IN- cable on the left most side of the band, IN+ cable in the middle, and REF cable on the right side as shown below.

Note

Make sure the dry electrodes (shiny parts of the BioAmp Cable) are in direct contact with the skin.

2. Now put a small amount of electrode gel or Ten20 paste between the skin and dry electrodes to get the best signal acquisition.

Note

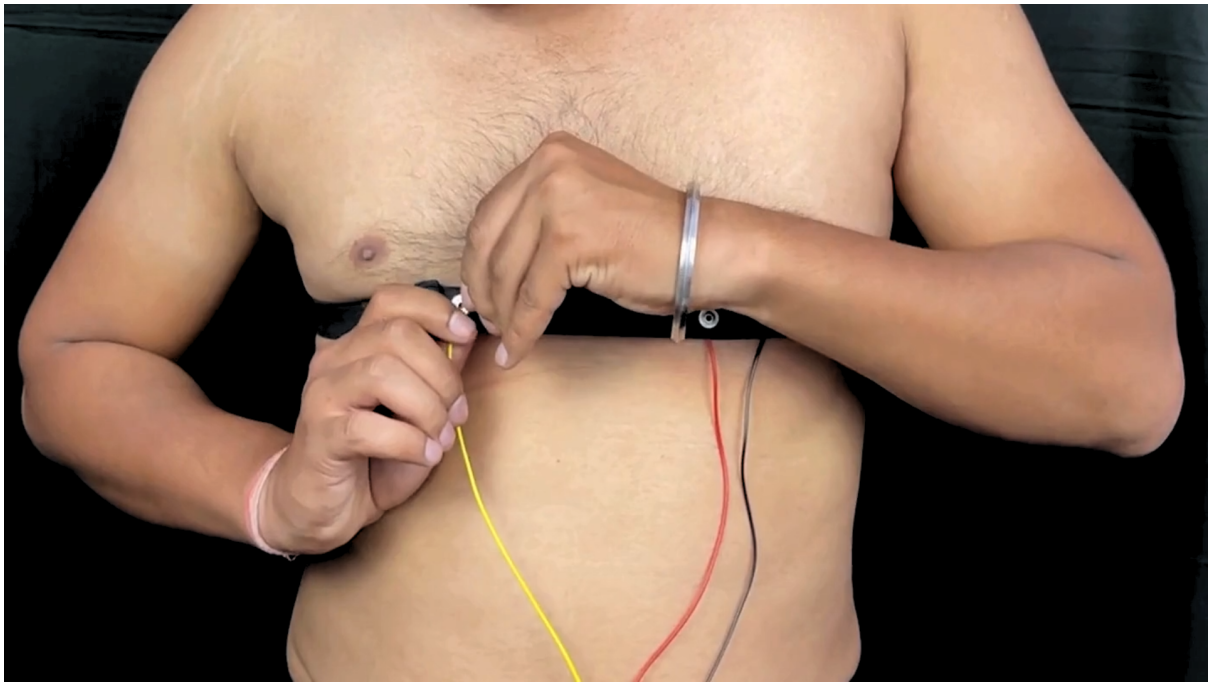

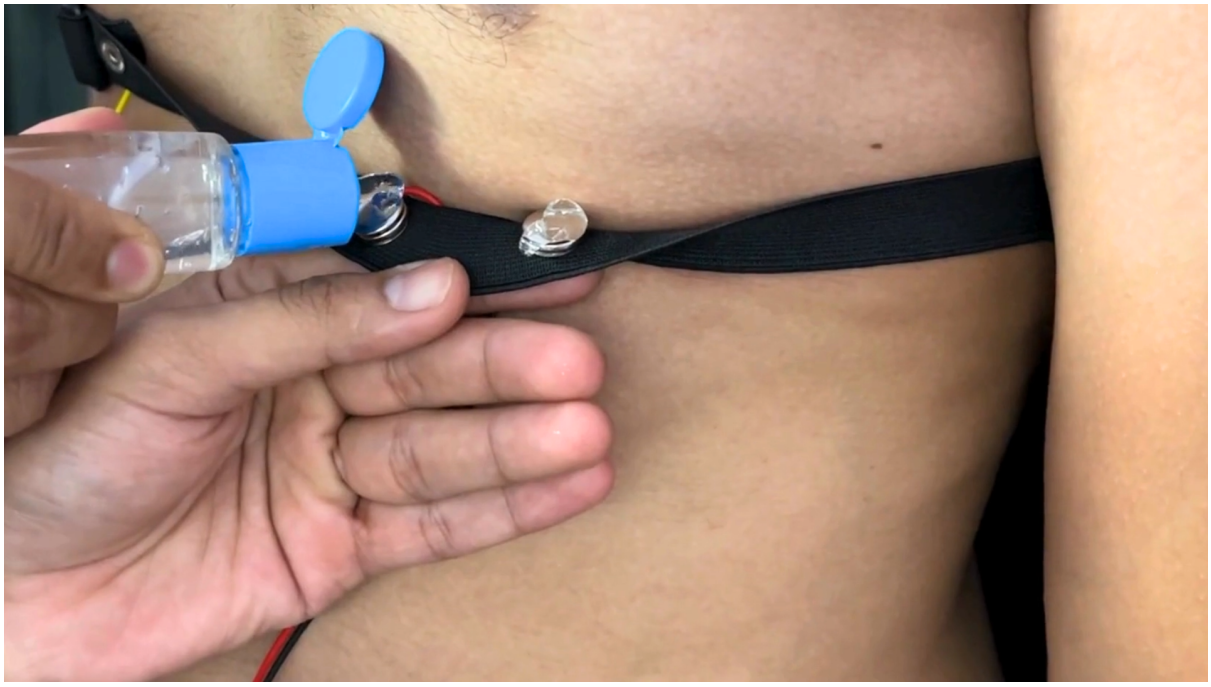

- After using the band, don't leave the gel residue on the dry electrodes longer than an hour as it may corrode them over a period of time.
- Wash the band with liquid soap and rinse it properly after every use. Use it again only when it is completely dry.

3.6 Using Brain BioAmp Band

3.6.1 Assembly

You get the band in two parts - the longer part consists of buckles at both ends and the shorter one has loose ends on both sides.

1. Hold one end of the longer band and align the top part of the buckle with the flat surface of the snap.
2. Now take the shorter band and insert it into the buckle of longer band.
3. Repeat step 1 and 2 for the other buckle on the longer band.
4. Your band is now ready to use. You can also adjust the size of the band according to your head size.

3.6.2 Skin Preparation

Apply Nuprep Skin Preparation Gel on your targeted area (visual cortex or prefrontal cortex) where dry electrodes would be placed to remove dead skin cells and clean the skin from dirt. After rubbing the skin surface thoroughly, clean it with an alcohol wipe or a wet wipe.

For more information, please check out detailed step by step *Skin Preparation Guide*.

3.6.3 Measure 1-channel EEG

1. Flip the band, take your BioAmp Cable, and snap the REF cable on a gel electrode. Now snap the IN- and IN+ cable on:

- Fp1 and Fp2 positions for recording EEG from prefrontal cortex
- O1 and O2 positions for recording EEG from visual cortex

Note

The electrode positions mentioned above are according to International 10-20 sytem for recording EEG.

2. Flip the band again and wear it in a way so that the dry electrodes (shiny parts of the cable) are in contact with:

- skin surface on the forehead (if recording from prefrontal cortex)
- scalp surface on the back side of your head (if recording from visual cortex)

3. Peel of the plastic backing of the gel electrode and place it on the bony part behind your earlobe.

Note

While placing the gel electrodes on the skin, make sure to place the non-sticky tab of the electrode in the direction opposite to your hair growth. This allows you to remove the electrodes easily without pulling off much body hair.

4. Now put a small amount of electrode gel or Ten20 paste between the skin/scalp and dry electrodes to get the best signal acquisition.