



Flash Write 방법

[CRZ Technology](#)





| Mango-M32F2 Flash Write 방법

Boot Select Switch(BOOT0)


Boot mode selection pins		Boot mode	Aliasing
BOOT1	BOOT0		
x	0	Main Flash memory	Main Flash memory is selected as the boot space
0	1	System memory	System memory is selected as the boot space
1	1	Embedded SRAM	Embedded SRAM is selected as the boot space

■ BOOT1은 0으로 고정됨.

■ BOOT0에 따라 2가지 모드 지원.

- 0 : Main Flash Memory, 사용자가 Flash Memory에 Write한 프로그램 수행
- 1 : System Memory, UART 이용 Flash Memory 다운로드 용도


Boot Select Switch(SW2)

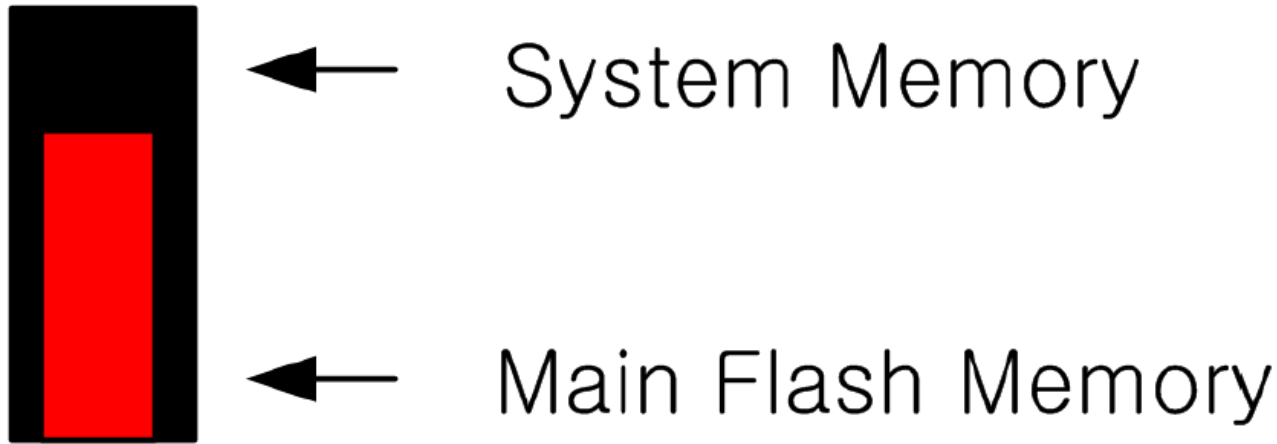

- SW2를 위로 올리면 Normal Boot Mode로 동작
- SW2를 아래로 내리면 Download Mode로 동작
- UART3에 3핀 Serial Cable을 연결하여 Download 진행


Flash Loader

■ “Flash Loader Demonstrator” 실행

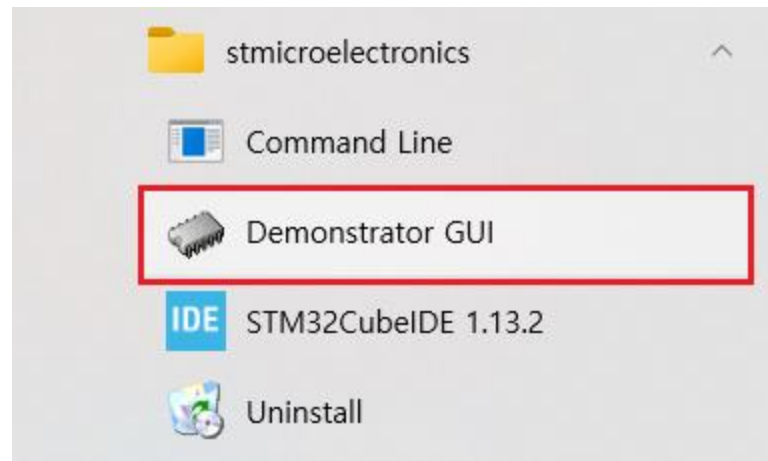

Flash Loader

- Port Name에서 UART30이 연결되어 있는 COM PORT를 선택하고 Next 클릭

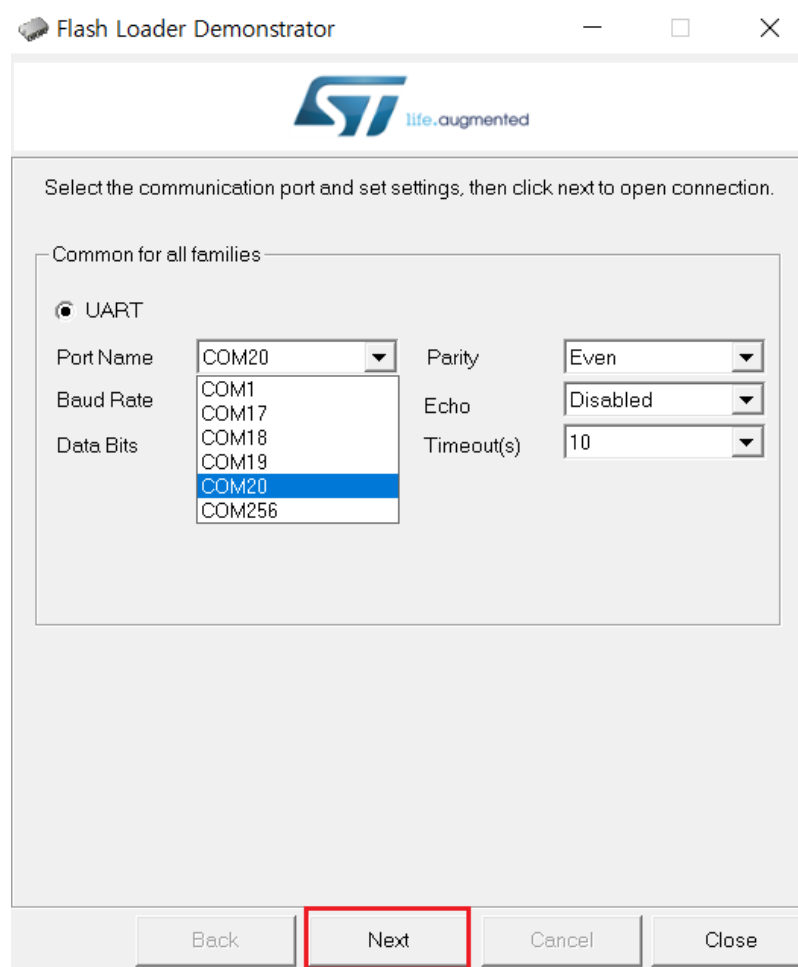

Flash Loader Demonstrator

ST life.augmented

Select the communication port and set settings, then click next to open connection.

Common for all families

☒ UART

Port Name: COM20 (selected from dropdown: COM1, COM17, COM18, COM19, COM20, COM256)

Baud Rate: (dropdown menu open)

Data Bits: (dropdown menu open)

Parity: Even


Echo: Disabled

Timeout(s): 10

Buttons: Back, Next (highlighted), Cancel, Close


Flash Loader

■ Next 클릭

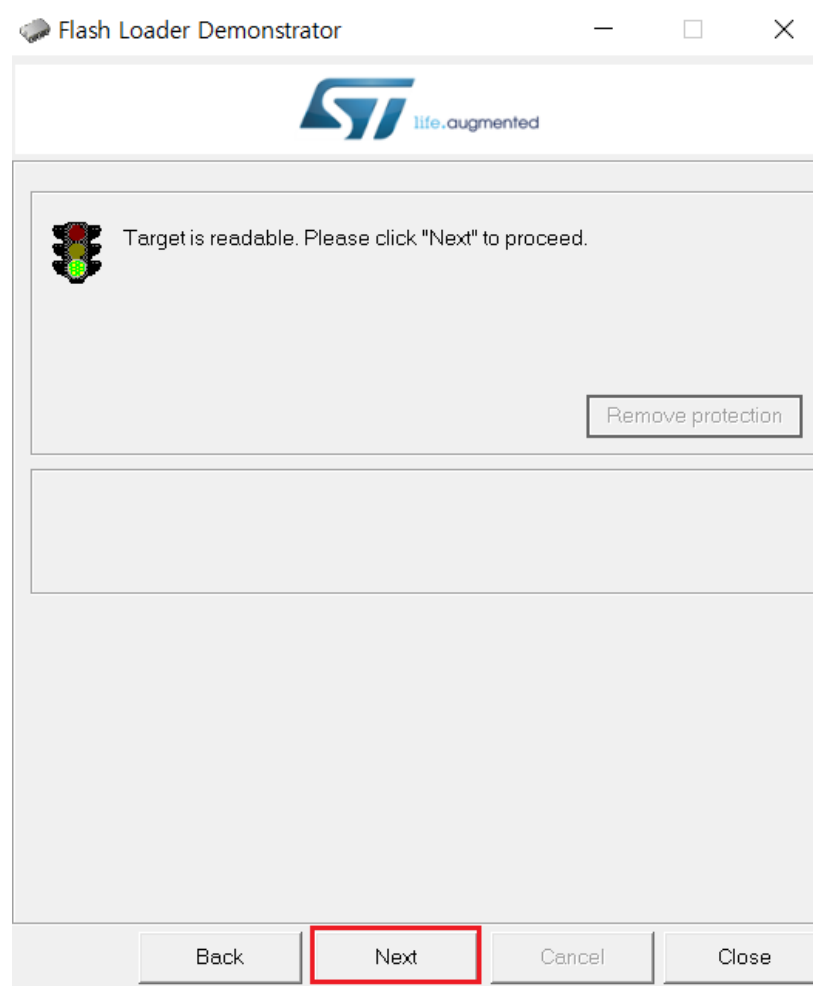


Flash Loader

- Select target에서 STM32F2_1024K 선택하고 Next 클릭.

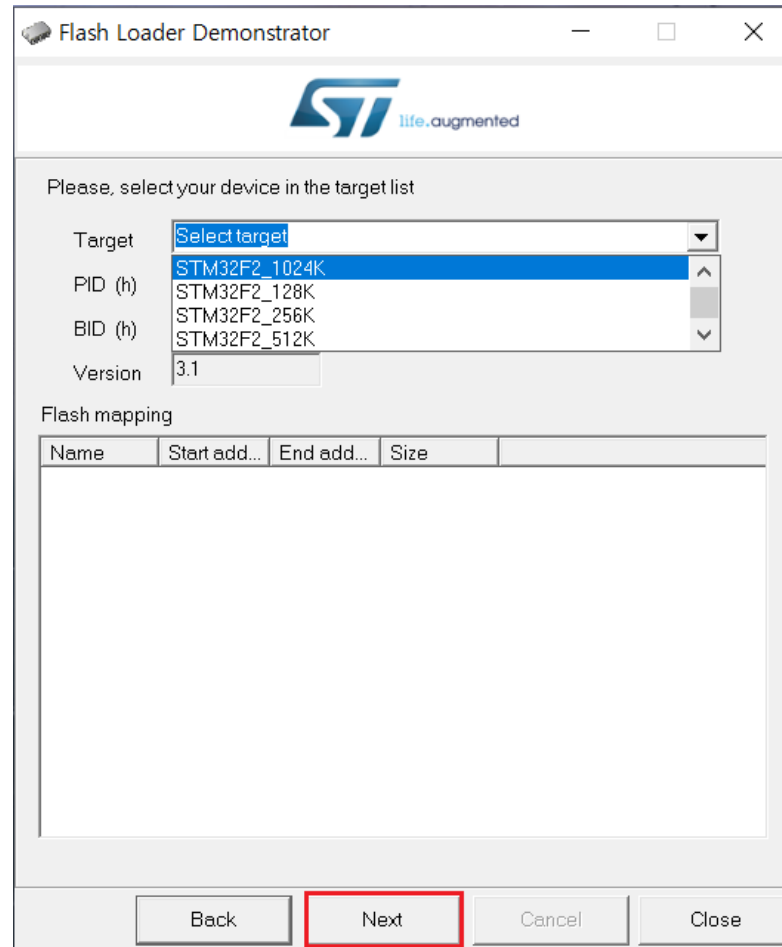


Flash Loader

- Download to device 클릭 후 Browse 버튼 클릭.

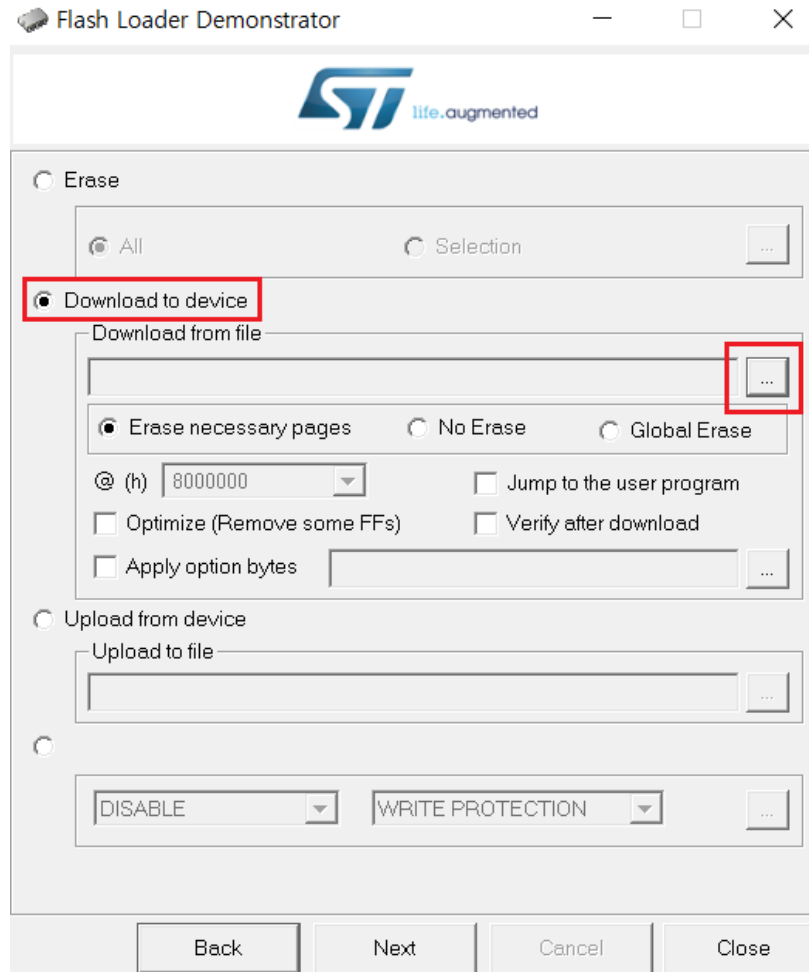


Flash Loader


- 빌드된 hex file 선택 후 Next 클릭.

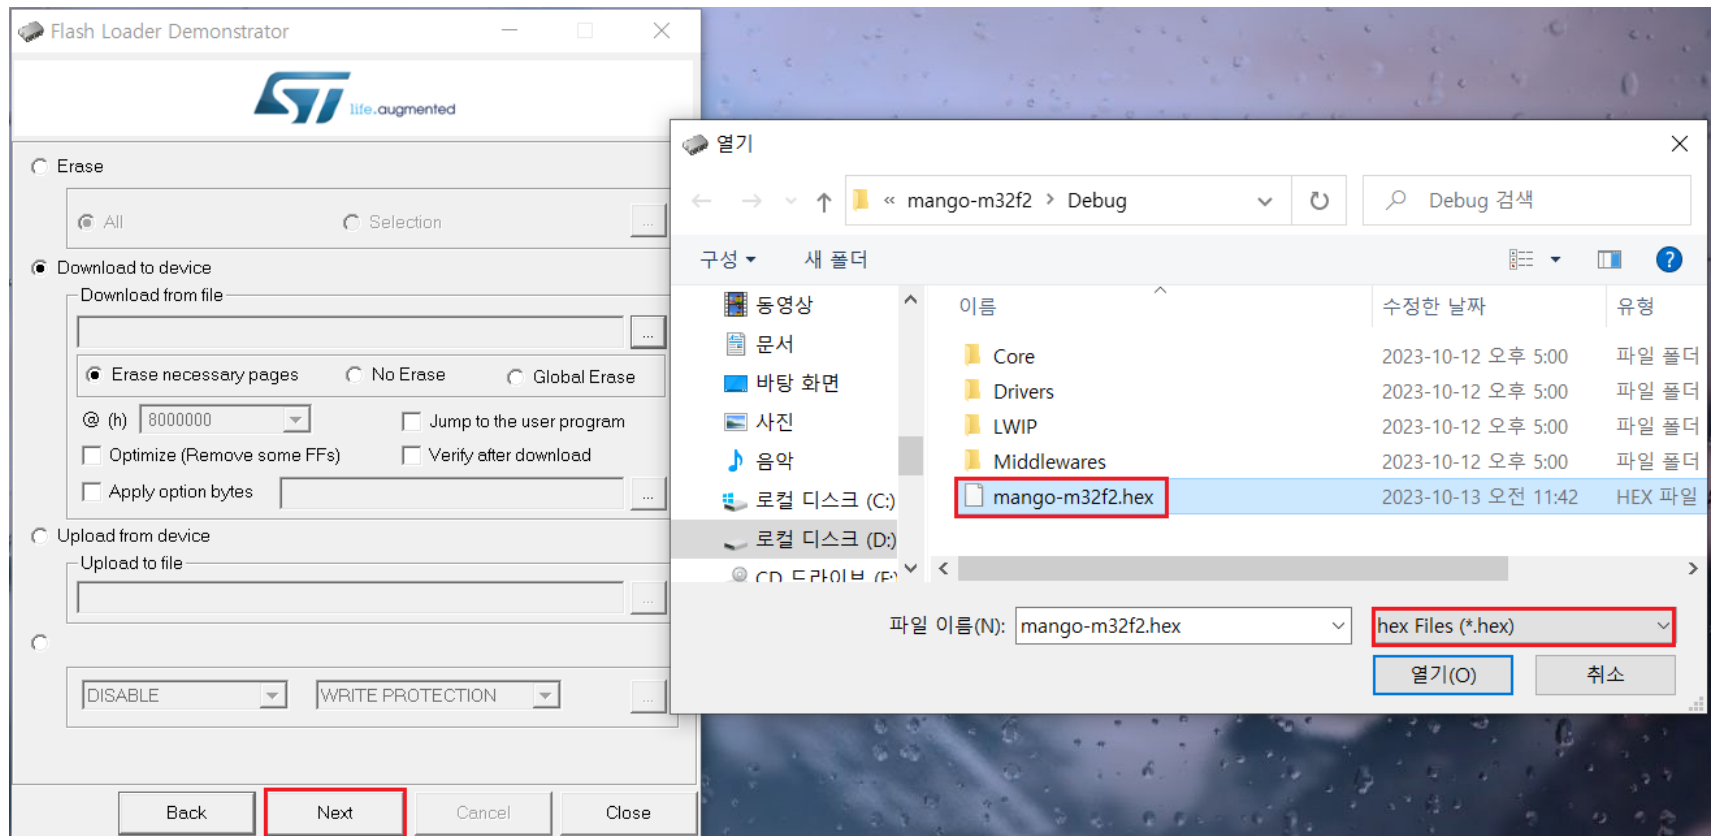

Flash Loader

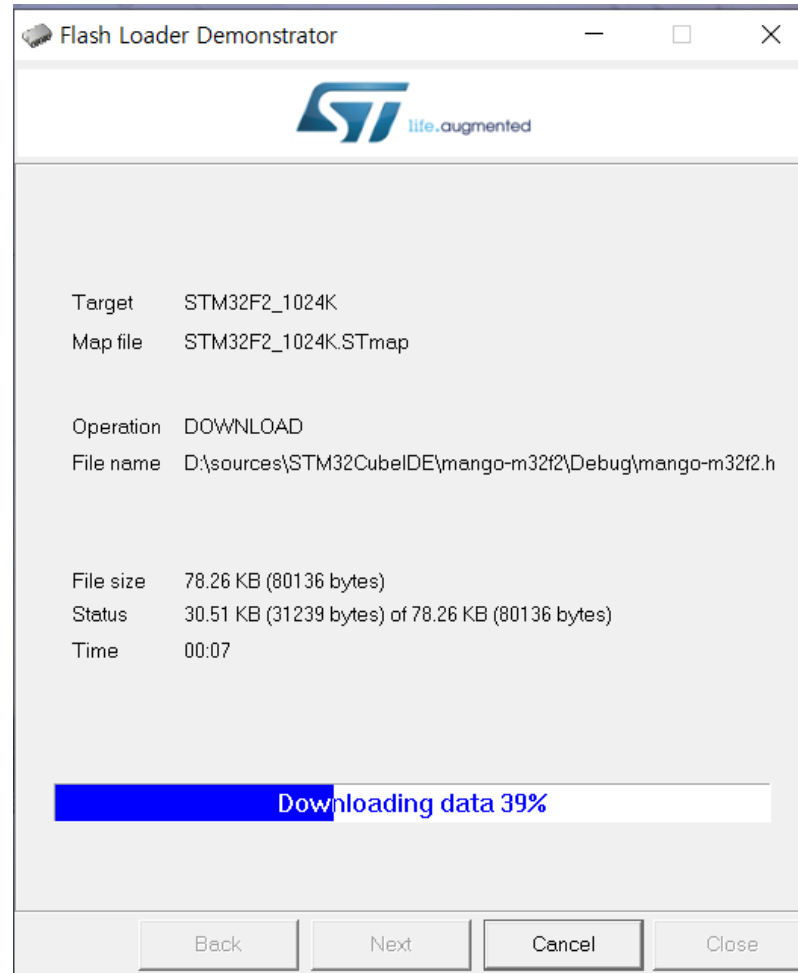

Flash Loader

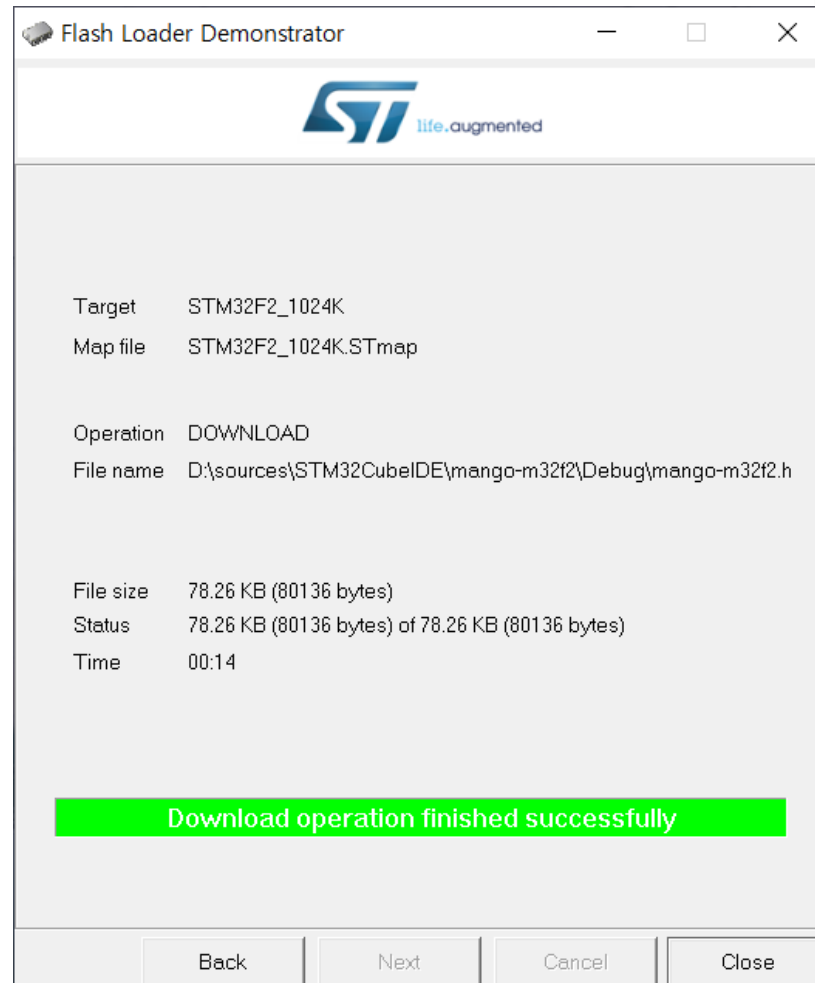

Flash Loader

- 전원 OFF 후 SW2를 위로 올림
- 3핀 Serial Cable을 UART1에 연결
- 전원 ON 후 동작 검증

Thank You

