



UART3 테스트

CRZ Technology






Mango-M32F2 UART3 테스트

STM32CubeIDE 프로젝트 생성

- Project Name으로 “uart3_prj” 입력 후 “Finish” 클릭.

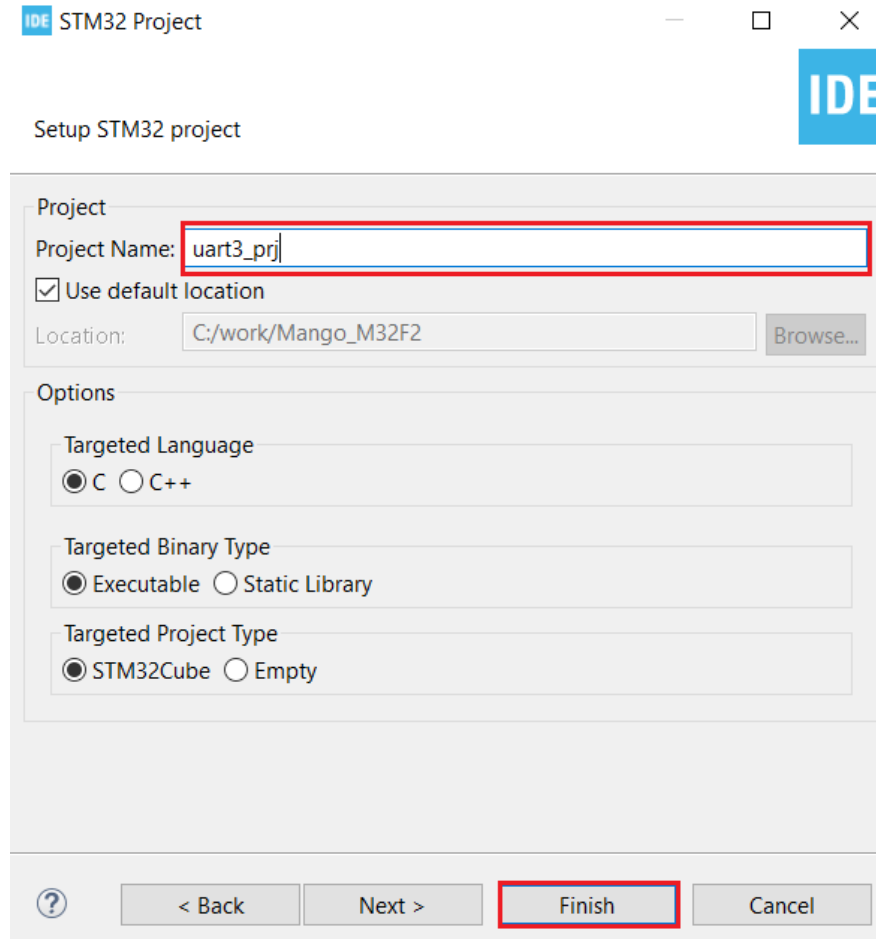

IDE STM32 Project

Setup STM32 project

Project

Project Name:

☒ Use default location

Location:

Options

Targeted Language

☒ C ☐ C++

Targeted Binary Type

☒ Executable ☐ Static Library

Targeted Project Type

☒ STM32Cube ☐ Empty


UART3 pinmap

■ UART3 – PC10 / PC11

PC9	78	PC10	PC10	UART3_TX
PC10	79	PC11	PC11	UART3_RX
PC11	80	PC12	PC12	UART5_TX


Pinout view

■ PC10 – USART3_TX, PC11 – USART3_RX 선택.

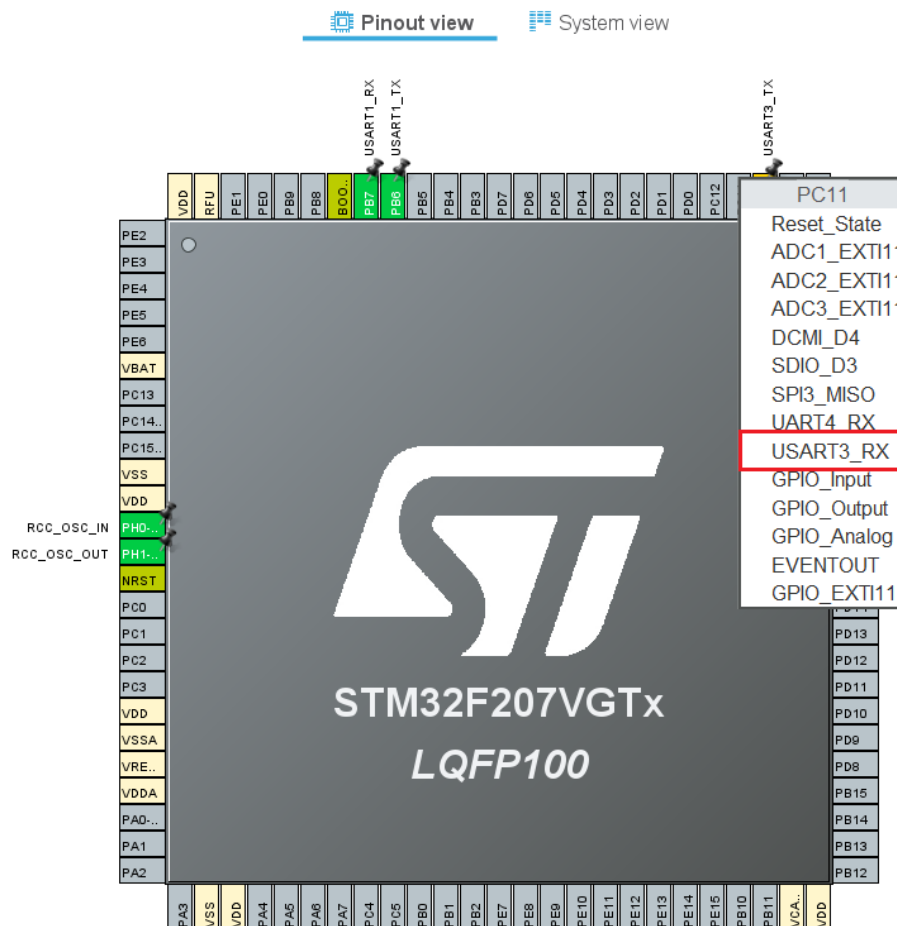


UART3 설정

- “Connectivity” 클릭, “USART3” 클릭.

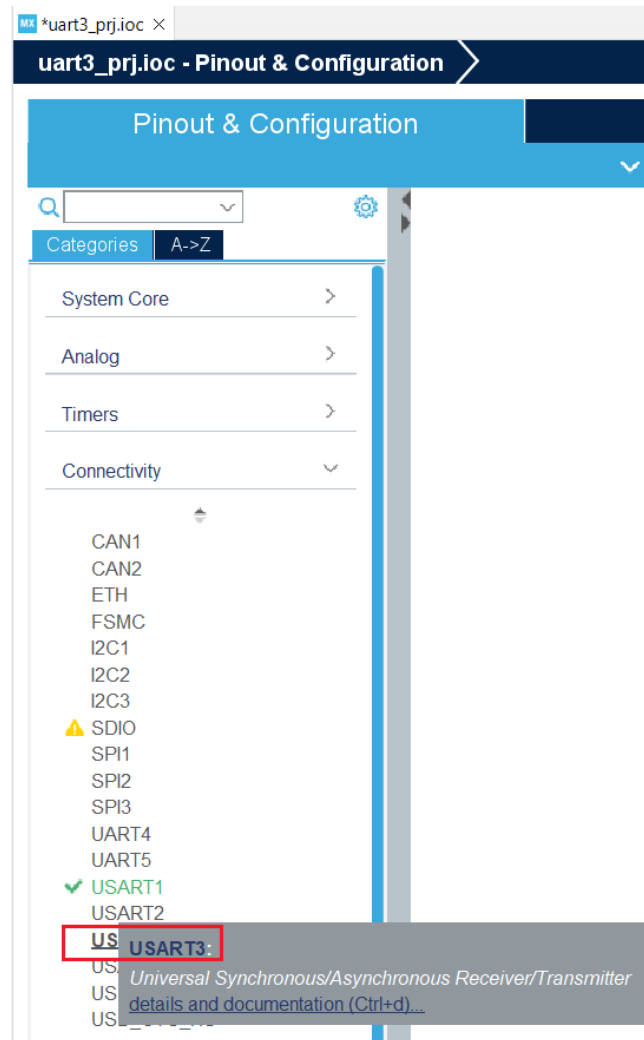


UART3 설정

■ “Mode“, “Asynchronous” 클릭.

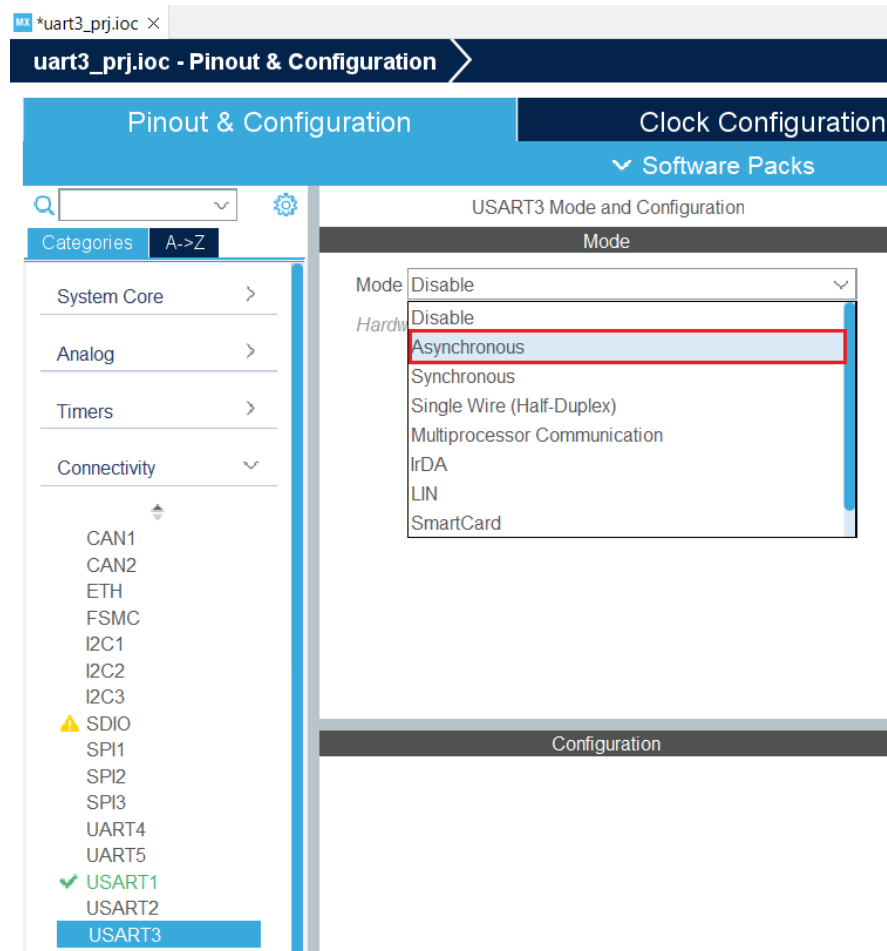

UART3 Test Project

■ “Save All”클릭, Code Generation.

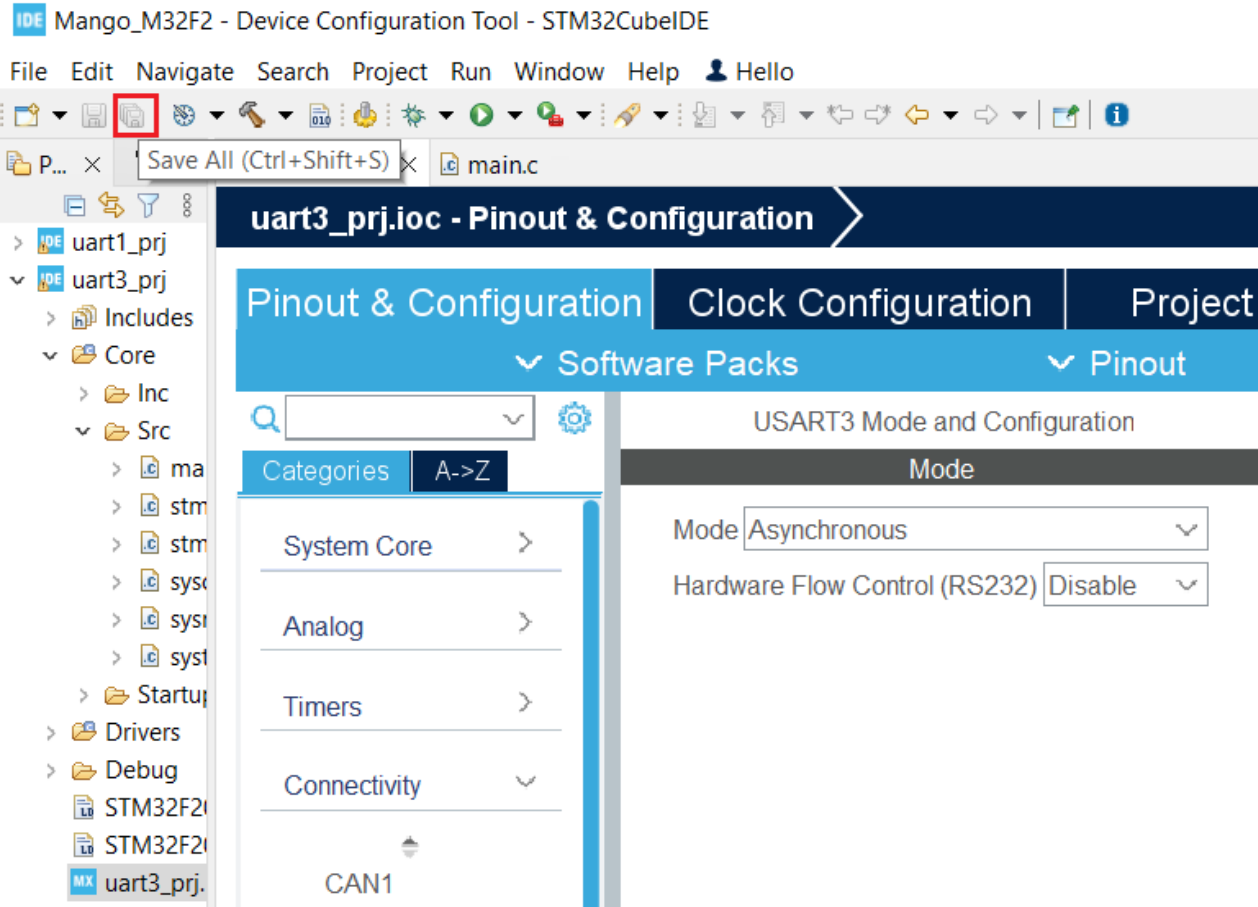

UART3 Test Project

■ core/src/main.c 편집

- printf() – UART3, overwrite _write() function

```
/* Private user code -----*/
/* USER CODE BEGIN 0 */
#define hUART huart3
int _write( int32_t file , uint8_t *ptr , int32_t len )
{
    /* Implement your write code here, this is used by puts and printf for example */
    for ( int16_t i = 0 ; i < len ; ++i )
    {
        HAL_UART_Transmit( &hUART, ptr++, 1, 100);
    }
    return len;
}
/* USER CODE END 0 */

/* USER CODE BEGIN 2 */
int count = 0;
printf("UART3 test\r\n");
/* USER CODE END 2 */

/* Infinite loop */
/* USER CODE BEGIN WHILE */
while (1)
{
    printf("count=%d\r\n", count++);
    HAL_Delay(1000);
    /* USER CODE END WHILE */

    /* USER CODE BEGIN 3 */
}
/* USER CODE END 3 */
```

Test 결과 확인

- 3핀 serial cable을 UART3에 연결하고 Flash Loader로 다운로드.
- 3핀 serial cable을 UART3에 연결하고 결과 확인.

A screenshot of a Tera Term VT window titled "COM5:115200baud - Tera Term VT". The window has a menu bar with "File", "Edit", "Setup", "Control", "Window", and "Help". The main text area displays the output of a UART3 test, showing a sequence of "count" values from 0 to 10. The text is white on a black background.

```
UART3 test  
count=0  
count=1  
count=2  
count=3  
count=4  
count=5  
count=6  
count=7  
count=8  
count=9  
count=10
```

Thank You

