


Upper lid - four requested M2 inserts

FOR QUOTATION / INSERT FEASIBILITY REVIEW - NOT RELEASED FOR PRODUCTION

Existing R19 mesh geometry. Confirm resin-compatible M2 insert and pocket changes before manufacture.

FILE: p4x-eye-lid-r19.stl

P1 - CAPTIVE SLIDER: X63.073 / Y44.800; slot 9 x 4.4 R1; underside guide 17 x 8.2 R1. See sheet 4.

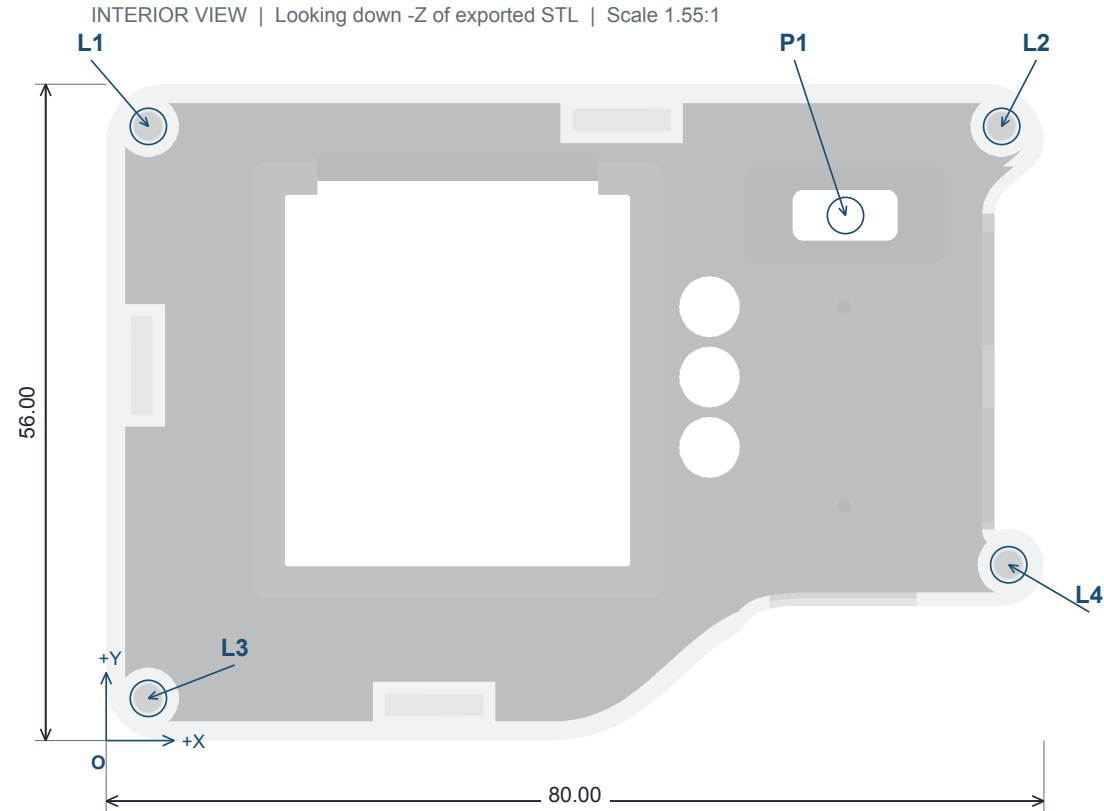


STL SHA-256: a008e282bf45ab73da0f6e2a3161a30a48c64b62779cc617ad8564bf4045d33f

4x M2 x 0.4 BONDED INSERTS REQUESTED

ID	X	Y	Entry Z
L1	3.60	52.40	14.50
L2	76.40	52.40	14.50
L3	3.60	3.60	14.50
L4	77.00	15.00	14.50

Installation: from interior, toward -Z in this STL.
Target: flush with each entry face; no exterior holes.

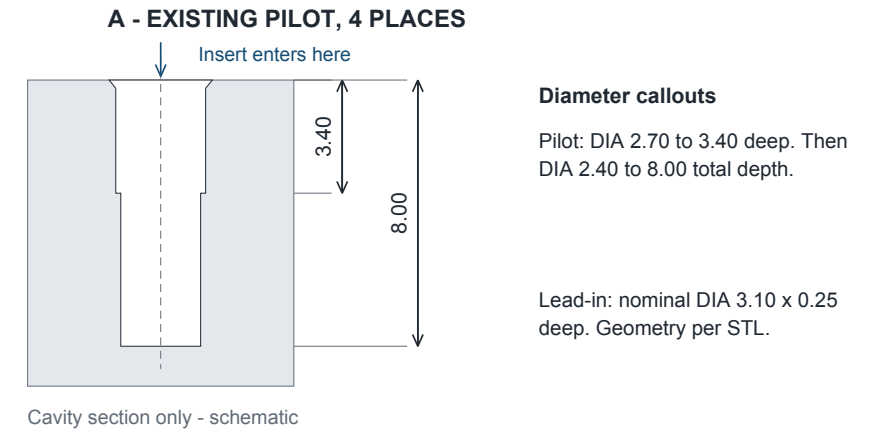


Do not add inserts to the two small button-anchor pilots.

Lower case - two requested M2 inserts

FOR QUOTATION / INSERT FEASIBILITY REVIEW - NOT RELEASED FOR PRODUCTION

Existing R19 mesh geometry. Confirm resin-compatible M2 insert and pocket changes before manufacture.

FILE: p4x-eye-base-r19.stl

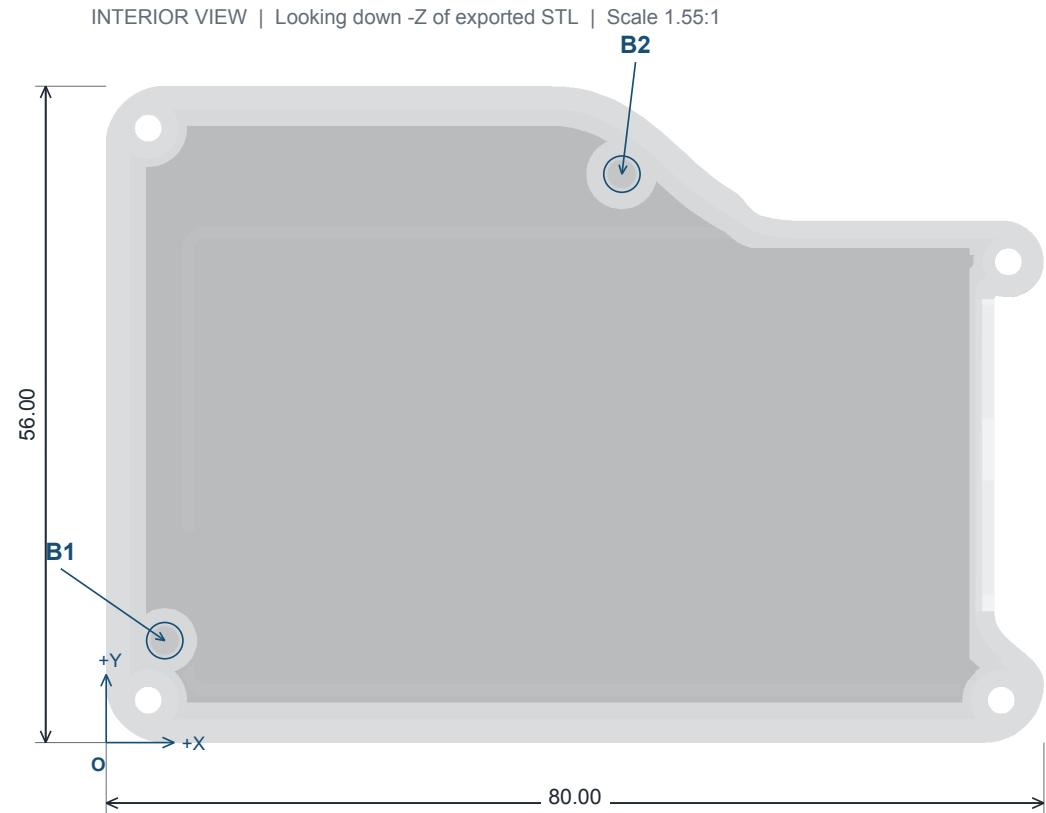

Envelope: 80.00 x 56.00 x 22.83


Origin O: exported STL X=0, Y=0; same XY as assembly.

STL SHA-256: f19430f9aaa5f246a8e07a59c4b8288e024deea481c8ded9723ba4e58b0bcf14

2x M2 x 0.4 BONDED INSERTS REQUESTED

ID	X	Y	Entry Z
B1	5.00	8.70	13.00
B2	44.00	48.50	13.00

Installation: from open case, toward -Z in this STL.
Flush post tops. B1 boss DIA 5.50; B2 boss DIA 6.00.

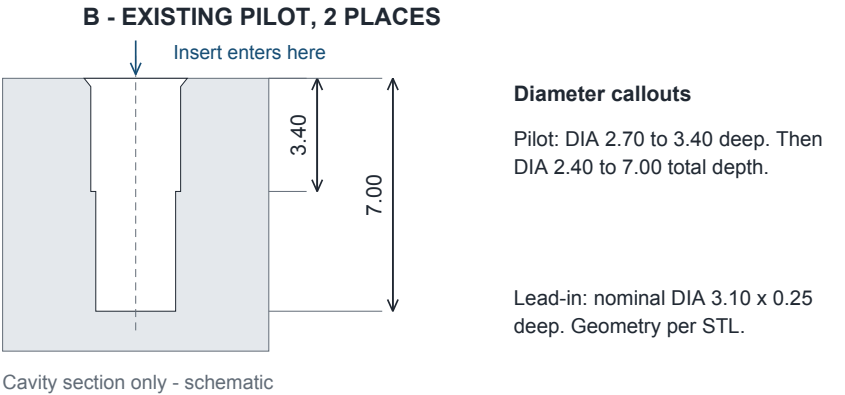

The four other case fastener locations are clearance holes, not insert locations: DIA 2.30 through to interior with DIA 4.50 x 10.20 deep head wells from the underside.


Preserve the closed bottom and enclosed screw-well walls.

Midframe, button strip and installation requirements

FOR QUOTATION / INSERT FEASIBILITY REVIEW - NOT RELEASED FOR PRODUCTION

Existing R19 mesh geometry. Confirm resin-compatible M2 insert and pocket changes before manufacture.

FILE: p4x-eye-midframe-r19.stl
FILE: p4x-eye-button-strip-r19.stl

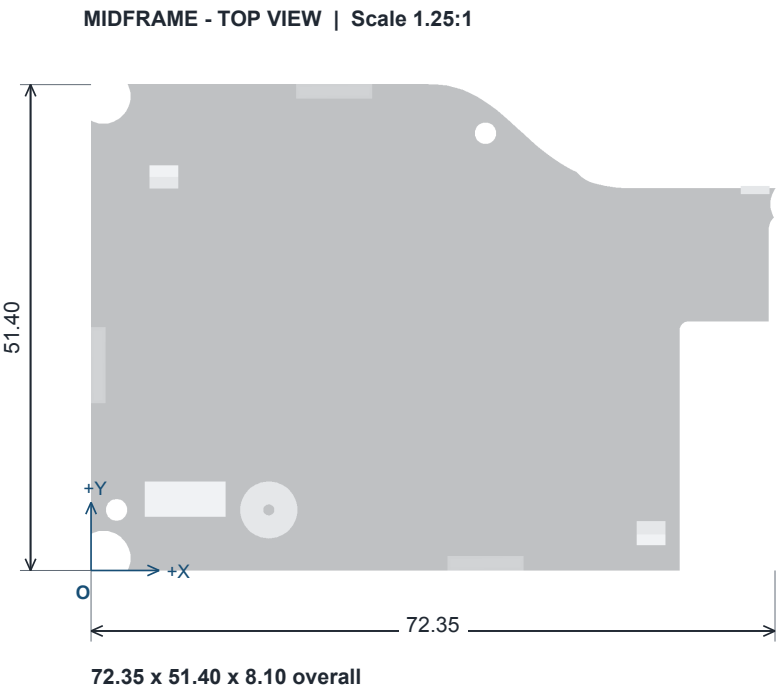


Two DIA 2.30 through-holes; no inserts in this part.
PCB mount: DIA 1.20 x 5.00 blind pilot; no M2 insert.
Cable bay open to front/right; thin strips removed.

FILE IDENTITY - SHA-256 PREFIX (full hashes in export-manifest.json)

Midframe: 81f19dcfb55d093c5c249db1 Button strip: c1ea0724901f3ee0f7fab17d

Views are derived from the final R19 STL meshes. Review document; no geometry was changed to create this drawing.

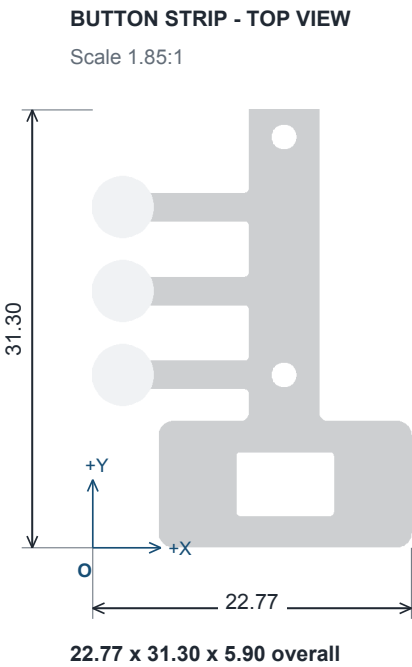

No inserts.
0.80 thick flex arms.
Includes slider retaining shelf.

SUPPLIER REVIEW / ORDER NOTES

- Quantity: one each of five parts. Six inserts total, only at L1-L4 and B1-B2.
- Request M2 x 0.4 brass inserts bonded with resin-compatible adhesive. No thermal insertion into cured resin.
- Existing pilots are for heat-setting, not approved glue pockets. Previous hardware envelope DIA 3.00 x 3.20 long is reference only and does not fit DIA 2.70 pilots as a bonded joint.
- Before printing, confirm insert part number, OD, length, adhesive and required hole / boss changes. Supply revised matching CAD/drawing for approval; do not silently enlarge these pockets.
- M2 x 8 screws measured under head. Base-post screw tip has only 0.50 nominal clearance with existing stack. Keep threads and tip space free of adhesive.
- Confirm thin-feature strength and finished fits: wheel wall 0.60; screw-well rim 0.75; button arms 0.80; receiver web 0.80; key fit 0.20 per side; button radial gap 0.40.
- Selected online material and finish, and uploaded 3D files, take priority. Select the intended clear resin / clear finish in the order; this drawing does not override those selections.
- Dimensions are nominal CAD references; no tighter manufacturing tolerance is imposed. Review dimensional changes from finishing. Physical fit is not verified.
- R19: captive power slider, revised lid guide and button-strip retainer. Replace lid and strip; add slider. Base and midframe retained. See sheet 4.


Captive power slider - assembly and running fits

FOR QUOTATION / INSERT FEASIBILITY REVIEW - NOT RELEASED FOR PRODUCTION

Existing R19 mesh geometry. Confirm resin-compatible M2 insert and pocket changes before manufacture.

FILE: p4x-eye-power-slider-r19.stl

SOCKET SIDE | Looking down -Z of exported STL | Scale 5:1

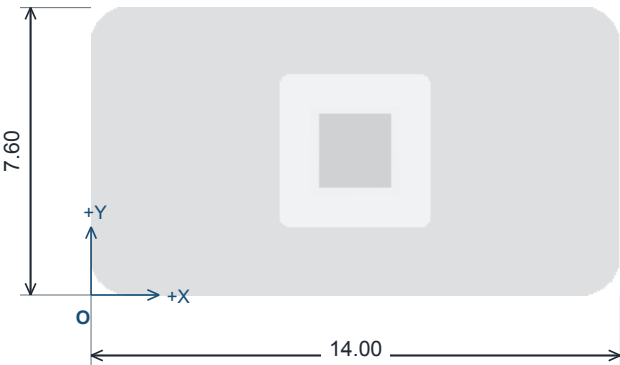

Envelope: 14.00 x 7.60 x 4.60; no inserts.


ASSEMBLY / FINISH

- Place the cap into the lid from inside, nub through the small slot. Its flange stays beneath the roof.
- Install the matching R19 button strip. Its shelf captures the cap using the existing two strip screws; no new fasteners or snap tabs.
- Align the 2 mm socket with the original switch lever when lowering the lid. Do not force it. Confirm both power positions and free sliding before tightening the case.
- Keep guides and socket free of adhesive and finish buildup. Validate clear-resin strength and fit. Overlapping cover only: no water or dust rating.

STL SHA-256: 0a015315a63f24862cbb357049290e7ec1ccfd520d325194817ae892d1d21d72

SECTION THROUGH SWITCH / SLIDER

Nominal assembly coordinates; shown mid-travel, scale 6:1

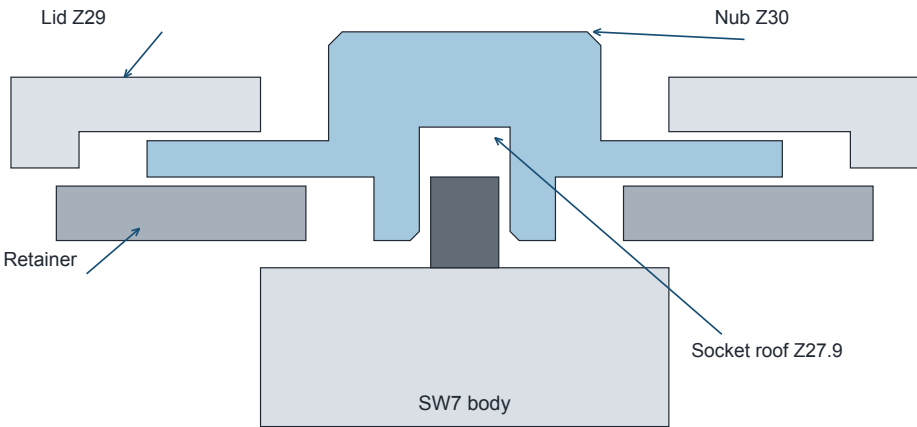

Clearances nominal; actual switch / resin fit unverified.

Feature	Nominal
Original switch travel	2.00 along X
Cap guide travel	3.00 along X
Lateral guide gap	0.30 each side
Vertical flange float	0.40 total (0.20 each side)
Switch socket / lever	2.00 square / 1.50 square
Skin above flange pocket	1.20
Overlap at full travel	1.00 ends; 1.60 sides