CARMINE-EMANUELE CELLA

PLAYING THE WORLD

AN INTRODUCTION TO PHYSICAL MODELLING FOR AUGMENTED REALITY

UC BERKELEY - MUSIC 159 - GUEST LECTURE #4

KATHARSIS AND MIMESIS

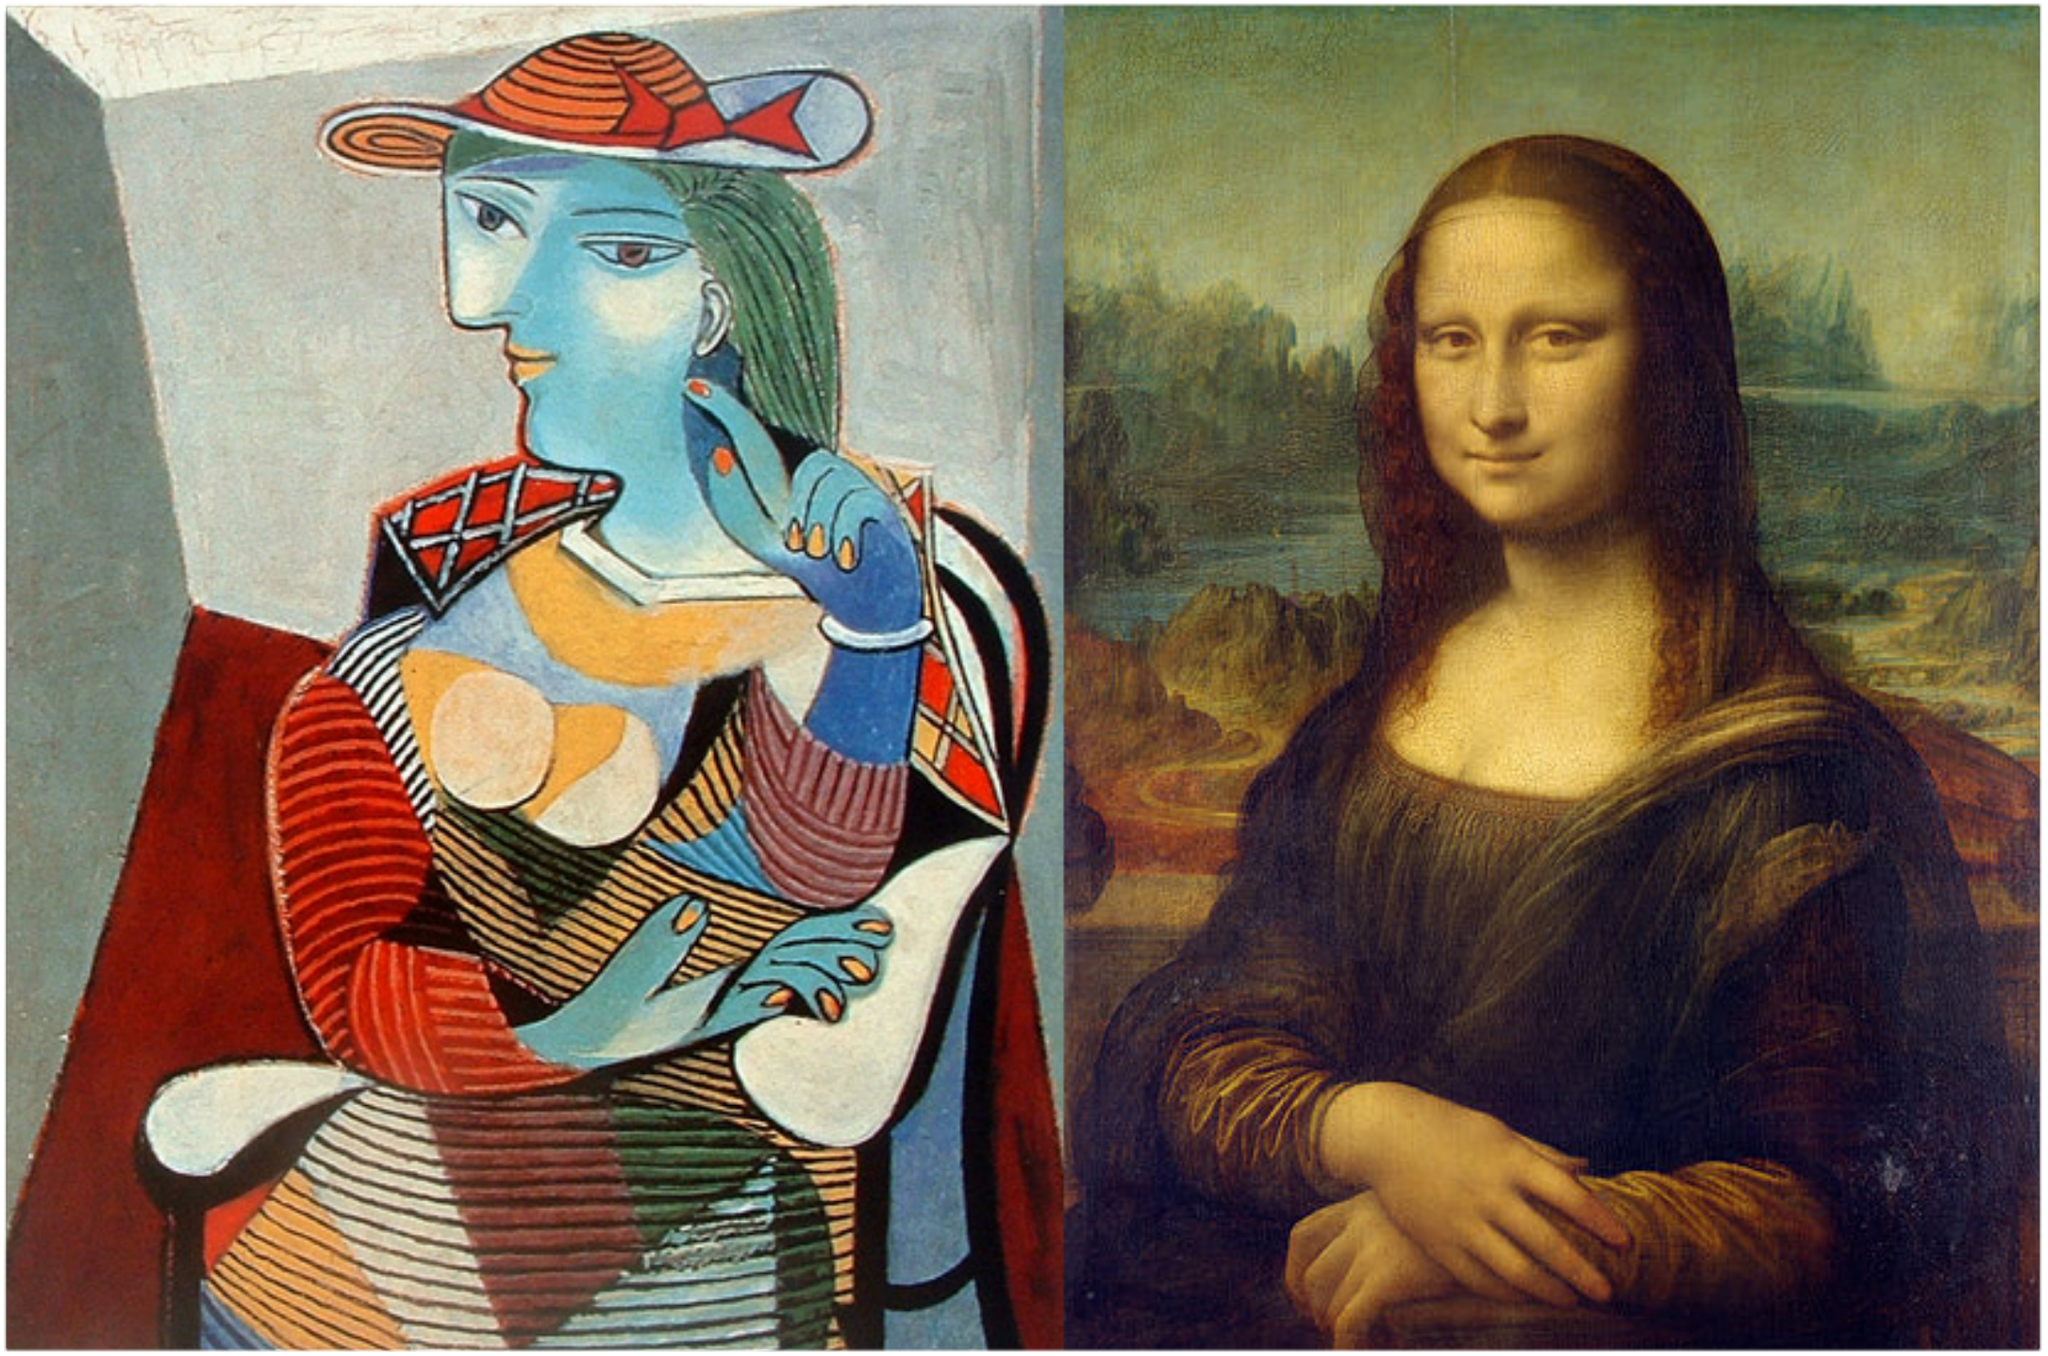

FROM PHYSICAL MODELLING TO PHYSICALLY INSPIRED

Physical modelling synthesis

Accurate

Real sounds (almost)

Physically inspired synthesis

Expressive

Plausible sounds

PHYSICAL MODELLING

- Physical modelling synthesis generates sounds by copying the **mechanical system under vibration** and not by copying the sound itself

PHYSICAL MODELLING

- Physical modelling synthesis generates sounds by copying the **mechanical system under vibration** and not by copying the sound itself
- It is based on the solutions of the wave equation: $\frac{\partial^2 u}{\partial t^2} = c^2 \frac{\partial^2 u}{\partial x^2}$.

PHYSICAL MODELLING

- Physical modelling synthesis generates sounds by copying the **mechanical system under vibration** and not by copying the sound itself
- It is based on the solutions of the wave equation: $\frac{\partial^2 u}{\partial t^2} = c^2 \frac{\partial^2 u}{\partial x^2}$.
- A simplification is represented by the **exciter-resonator** system

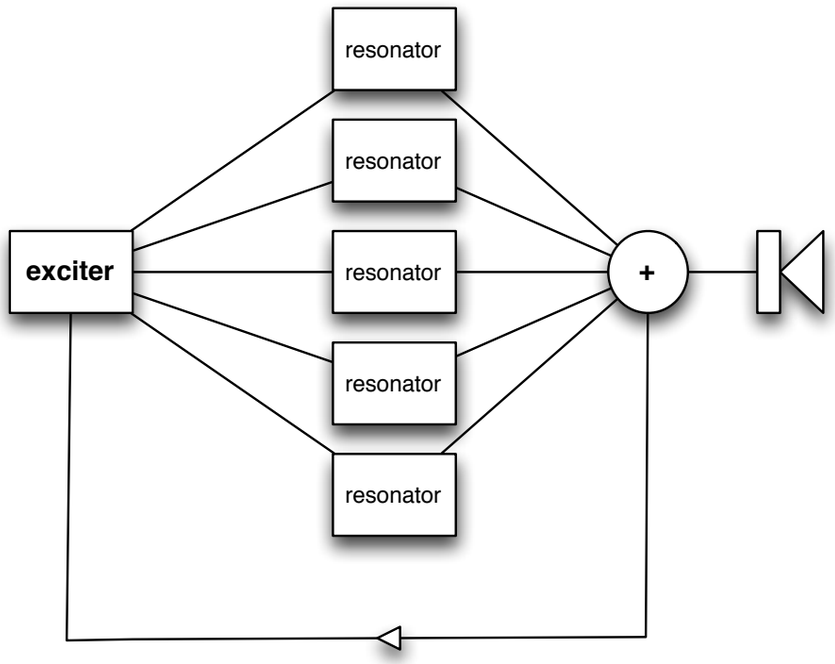

PHYSICAL MODELLING

- Physical modelling synthesis generates sounds by copying the **mechanical system under vibration** and not by copying the sound itself
- It is based on the solutions of the wave equation: $\frac{\partial^2 u}{\partial t^2} = c^2 \frac{\partial^2 u}{\partial x^2}$.
- A simplification is represented by the **exciter-resonator** system

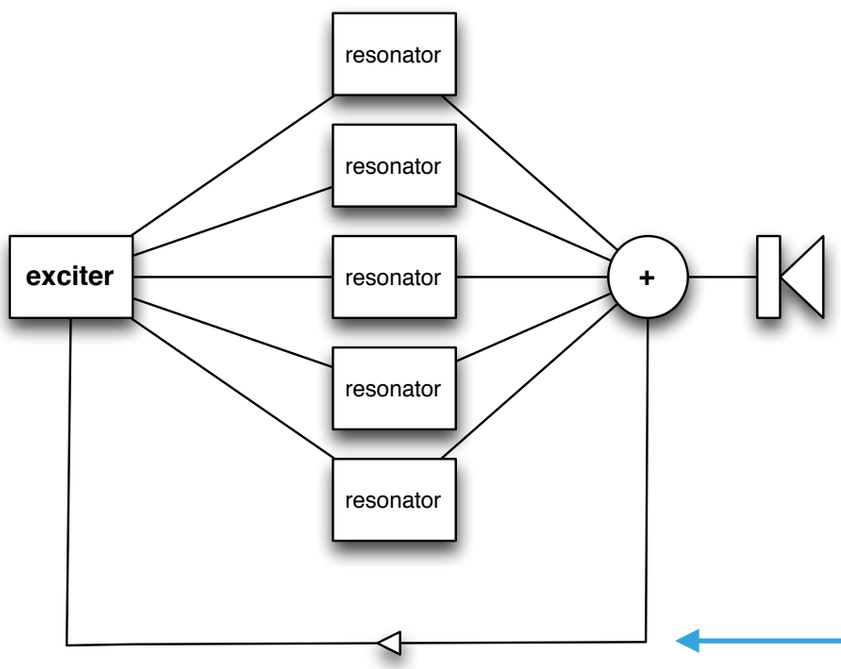

HISTORICAL PERSPECTIVE

- Karplus-Strong (1983): delay-line + lowpass filter
- Smith-Karplus-Strong (1983): delay-line + lowpass filter + allpass filter
- Waveguides (1990/2000, Smith): two delay lines with taps and various filters
- **Modal synthesis** (1990/2010, Adrien): resonant filters and modal weights

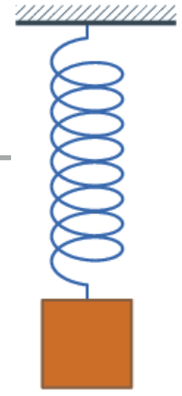

MODES OF VIBRATION

- A vibrating object can be described by the *harmonic oscillator,* that can be represented by the spring-mass system:

$$x = e^{-\alpha t} A cos(\omega_d t + \phi) \quad (1)$$

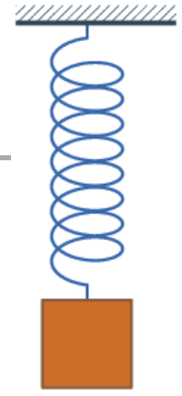

MODES OF VIBRATION

- A vibrating object can be described by the *harmonic oscillator,* that can be represented by the spring-mass system:

$$x = e^{-\alpha t} A cos(\omega_d t + \phi) \quad (1)$$

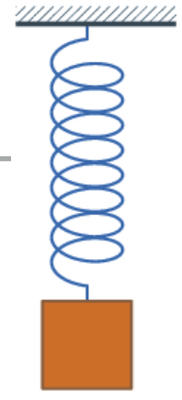

MODES OF VIBRATION

- A vibrating object can be described by the *harmonic oscillator,* that can be represented by the spring-mass system:

$$x = e^{-\alpha t} A cos(\omega_d t + \phi) \quad (1)$$

- α is the decay constant of the system and depends on the mass and on the stiffness of the spring (dissipation)

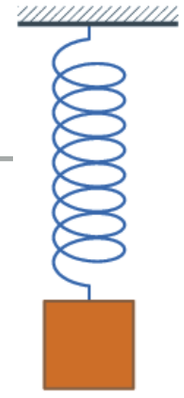

MODES OF VIBRATION

- A vibrating object can be described by the *harmonic oscillator,* that can be represented by the spring-mass system:

$$x = e^{-\alpha t} A cos(\omega_d t + \phi) \quad (1)$$

- α is the decay constant of the system and depends on the mass and on the stiffness of the spring (dissipation)

- ω_d is the natural angular frequency

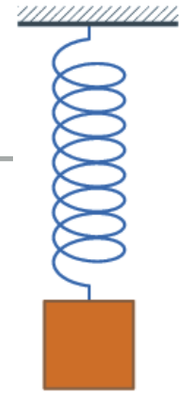

MODES OF VIBRATION

- A vibrating object can be described by the *harmonic oscillator,* that can be represented by the spring-mass system:

$$x = e^{-\alpha t} A cos(\omega_d t + \phi) \quad (1)$$

- α is the decay constant of the system and depends on the mass and on the stiffness of the spring (dissipation)

- ω_d is the natural angular frequency

- A and ϕ are, respectively, the amplitude and the phase of the vibration and are determined by initial displacement and velocity

MODES OF VIBRATION

A natural mode of vibration, as described by equation 1

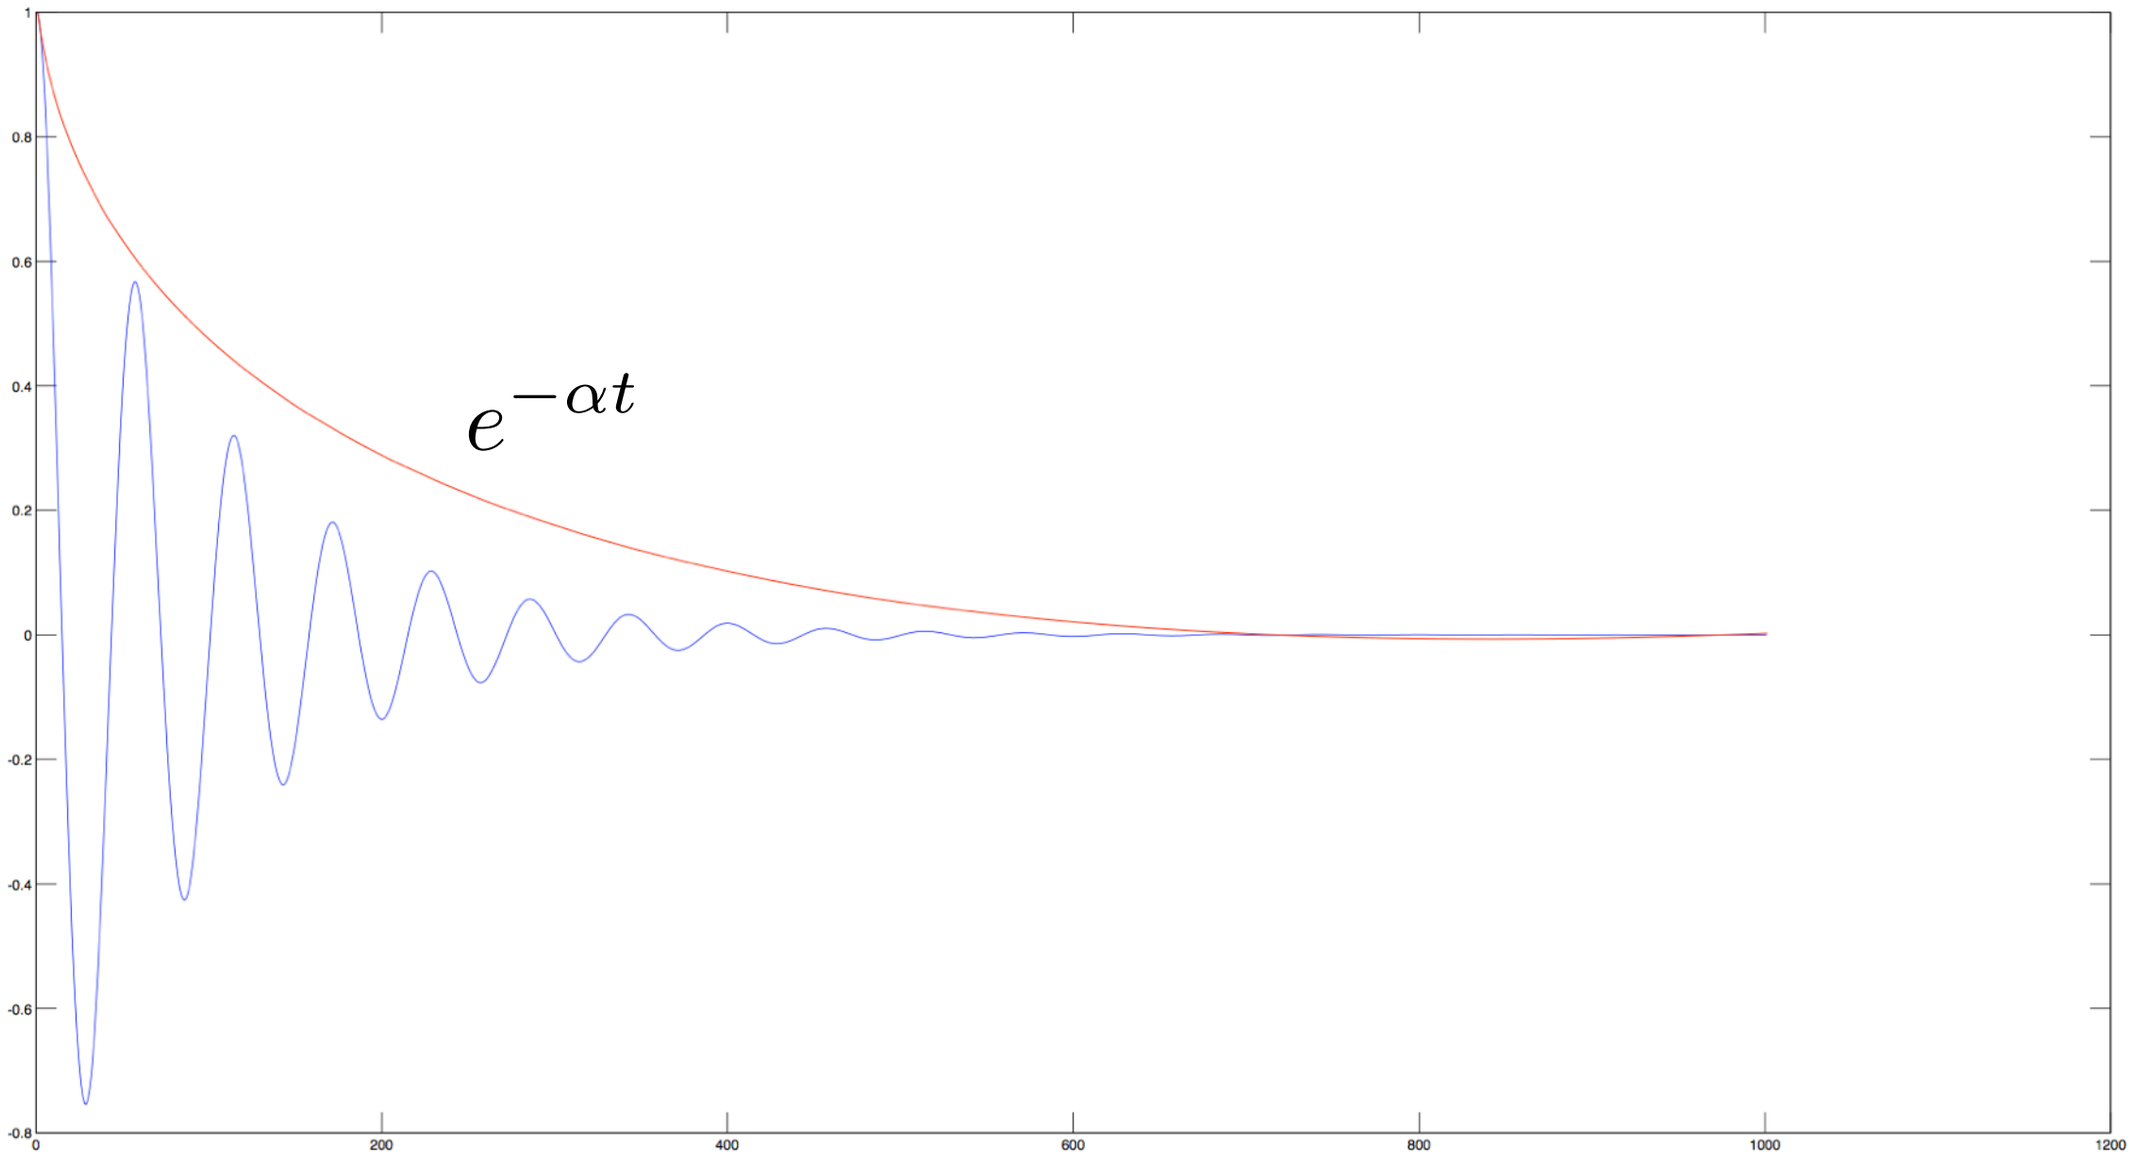

MODES AND FILTERS

In the digital domain, equation 1 can be reproduced by the following second-order differential equation (two-poles):

$$y = x \cdot b_0 - y \cdot z^{-1} \cdot a_1 - y \cdot z^{-2} \cdot a_2 \qquad (2)$$

where z^{-n} is the delay of n digital samples, b_0, a_1 and a_2 are *coefficients* and x is the input signal

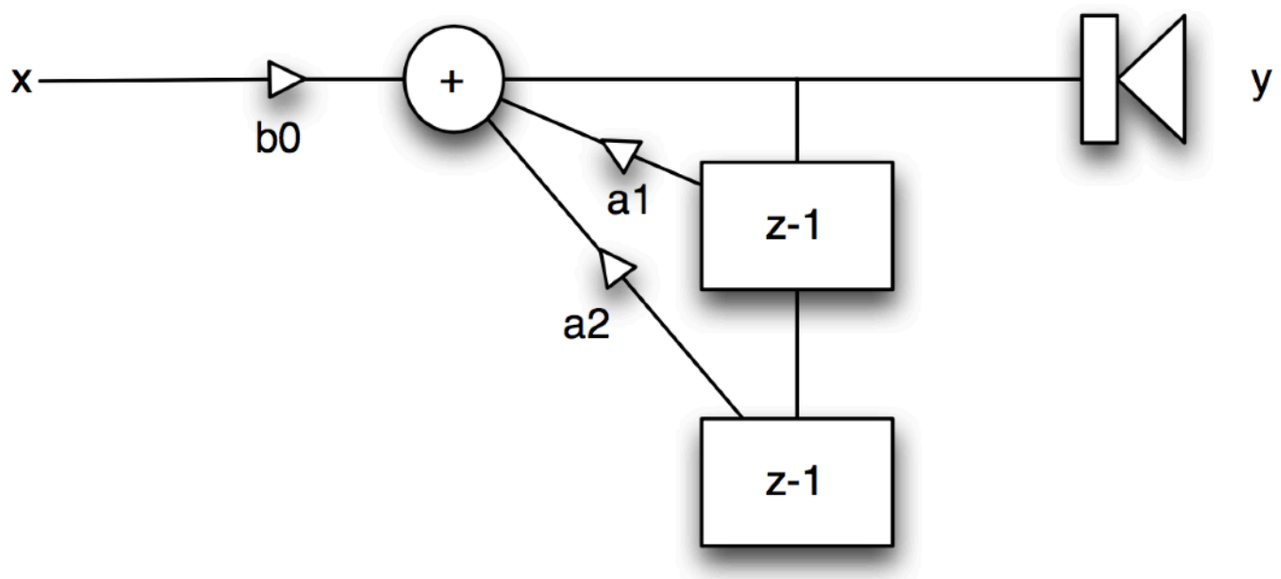

MODES AND FILTERS

In the digital domain, equation 1 can be reproduced by the following second-order differential equation (two-poles):

$$y = x \cdot b_0 - y \cdot z^{-1} \cdot a_1 - y \cdot z^{-2} \cdot a_2 \qquad (2)$$

where z^{-n} is the delay of n digital samples, b_0, a_1 and a_2 are *coefficients* and x is the input signal

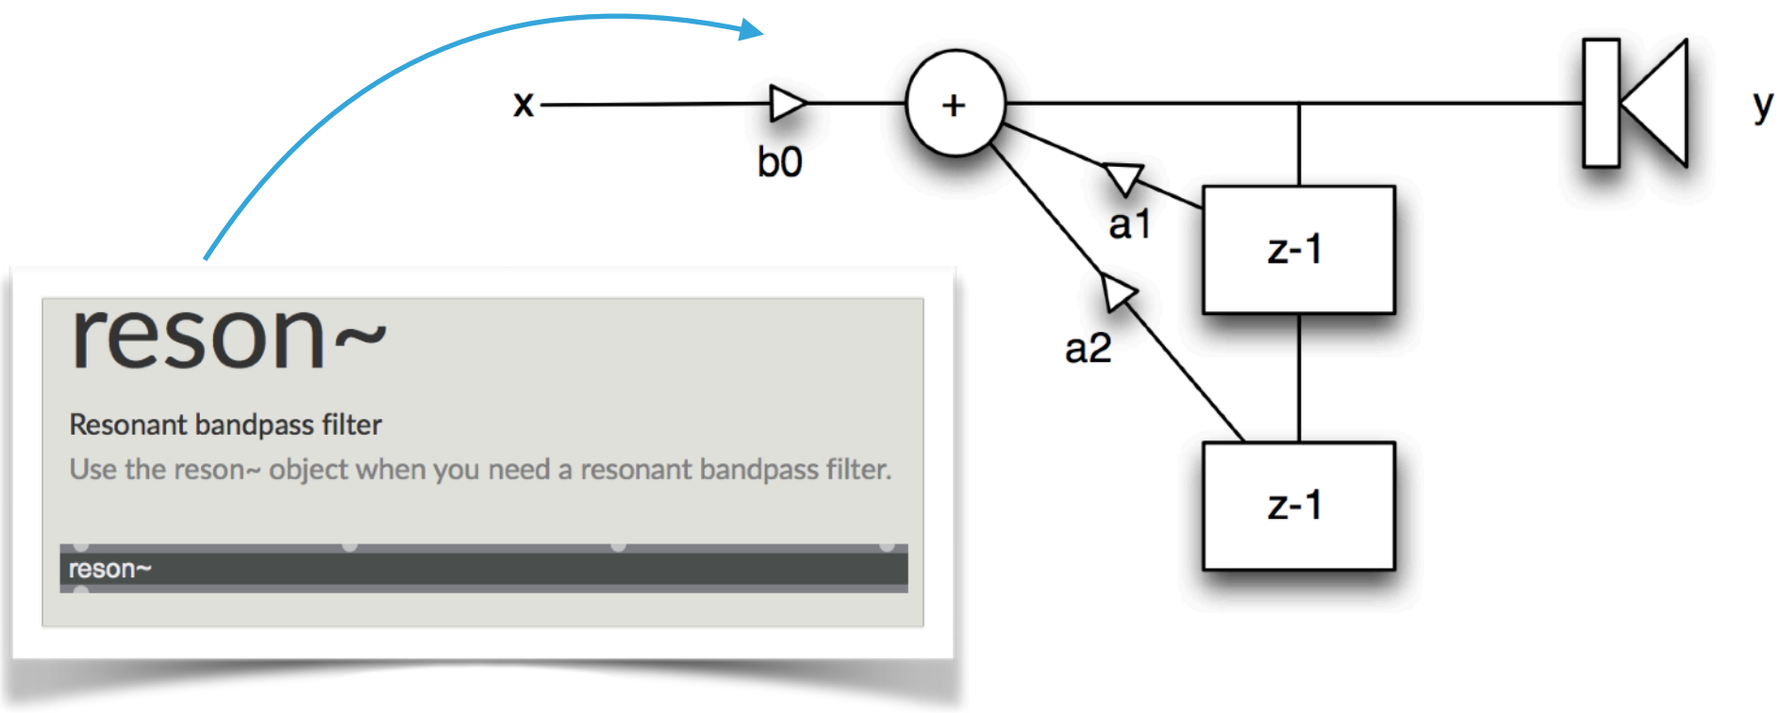

PROPERTIES OF MODAL SYNTHESIS

- The estimation of the parameters for resonators is based on *experimental* measurements

PROPERTIES OF MODAL SYNTHESIS

- The estimation of the parameters for resonators is based on *experimental* measurements

- Frequencies and the decays are based on physical properties (such as inharmonicity), amplitudes are usually determined by the **feedback** interaction between the resonators and the exciter

PROPERTIES OF MODAL SYNTHESIS

- The estimation of the parameters for resonators is based on *experimental* measurements

- Frequencies and the decays are based on physical properties (such as inharmonicity), amplitudes are usually determined by the **feedback** interaction between the resonators and the exciter

- Injecting a digital impulse into the resonators, will equally excite all resonators; with a feedback, the excitation signal will exhibit **temporal smearing** and **frequency equalisation**

PROPERTIES OF MODAL SYNTHESIS

- The estimation of the parameters for resonators is based on *experimental* measurements

- Frequencies and the decays are based on physical properties (such as inharmonicity), amplitudes are usually determined by the **feedback** interaction between the resonators and the exciter

- Injecting a digital impulse into the resonators, will equally excite all resonators; with a feedback, the excitation signal will exhibit **temporal smearing** and **frequency equalisation**

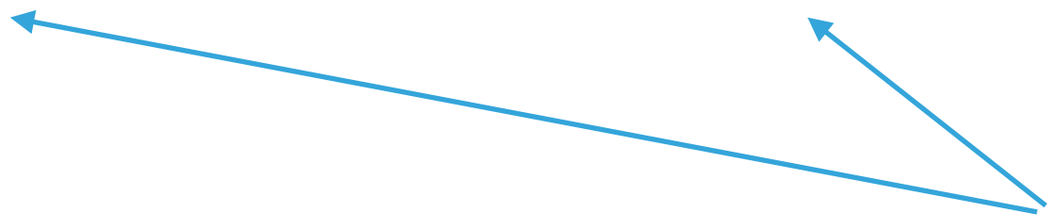

Feedback = timbre!!

A CREATIVE APPROACH

- The simulation of a real vibrating object by means of modal synthesis (for example a musical instrument) can be a difficult task

A CREATIVE APPROACH

- The simulation of a real vibrating object by means of modal synthesis (for example a musical instrument) can be a difficult task
- The simulation of *quasi*-physical instruments can be an interesting creative activity

A CREATIVE APPROACH

- The simulation of a real vibrating object by means of modal synthesis (for example a musical instrument) can be a difficult task

- The simulation of *quasi*-physical instruments can be an interesting creative activity

- **Physically inspired** synthesis is variant of modal synthesis that generates sounds with special *physical* characteristics without modelling real vibrating objects

PARAMETER MODELS

In physically inspired synthesis, the feedback between the exciter and the resonators is replaced by a **parameter model** and the excitation is provided by a **sensor**

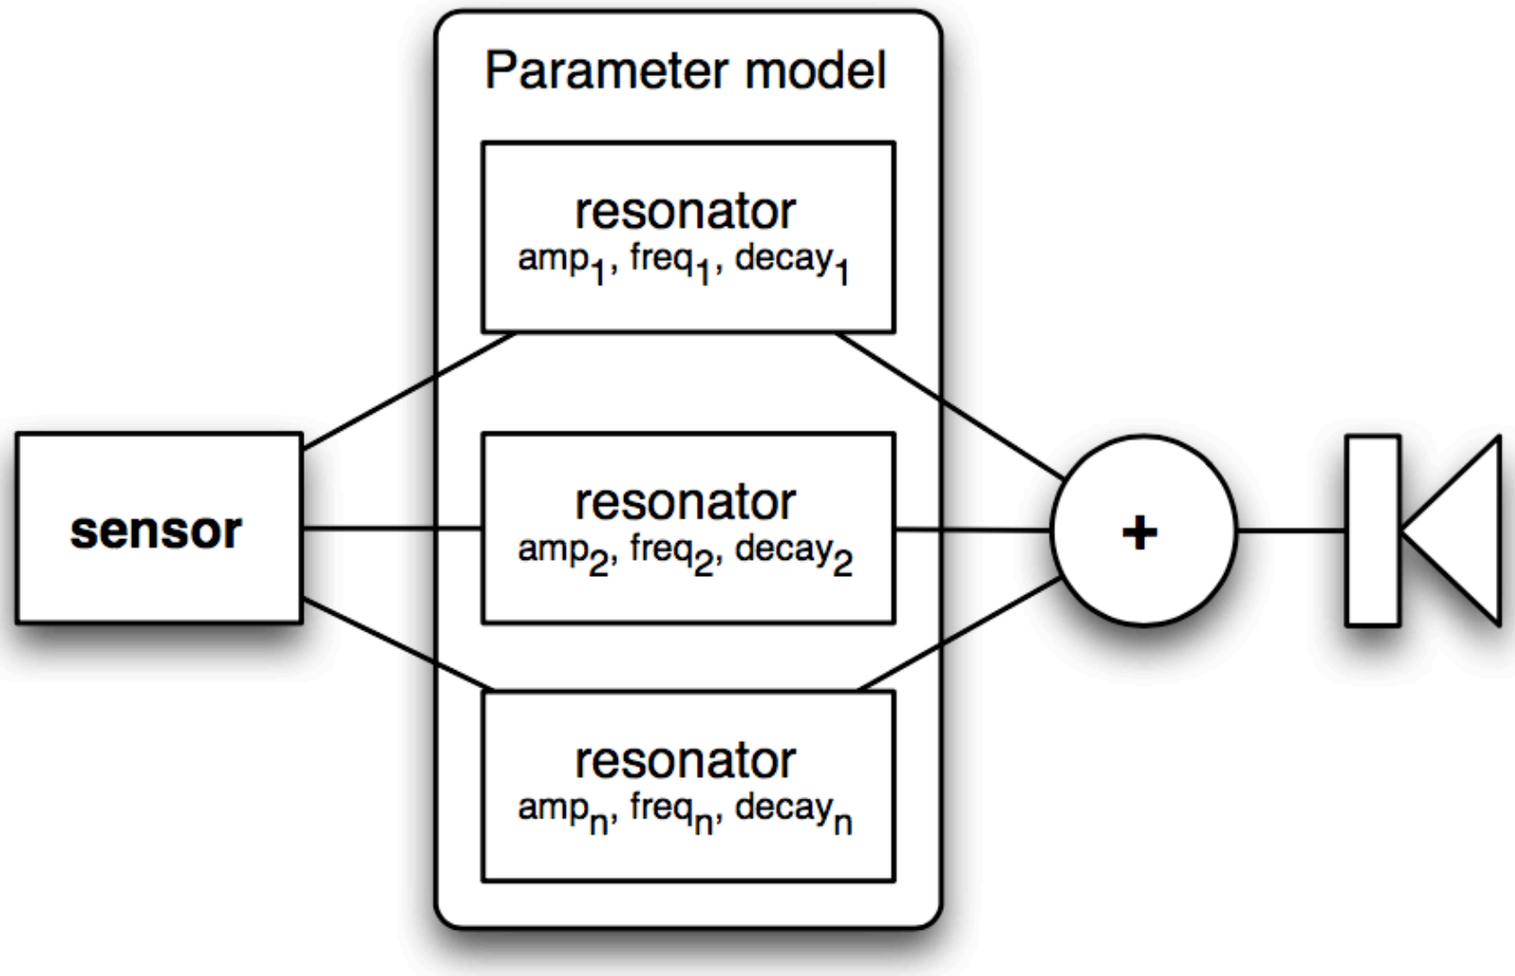

PARAMETER MODELS

In physically inspired synthesis, the feedback between the exciter and the resonators is replaced by a **parameter model** and the excitation is provided by a **sensor**

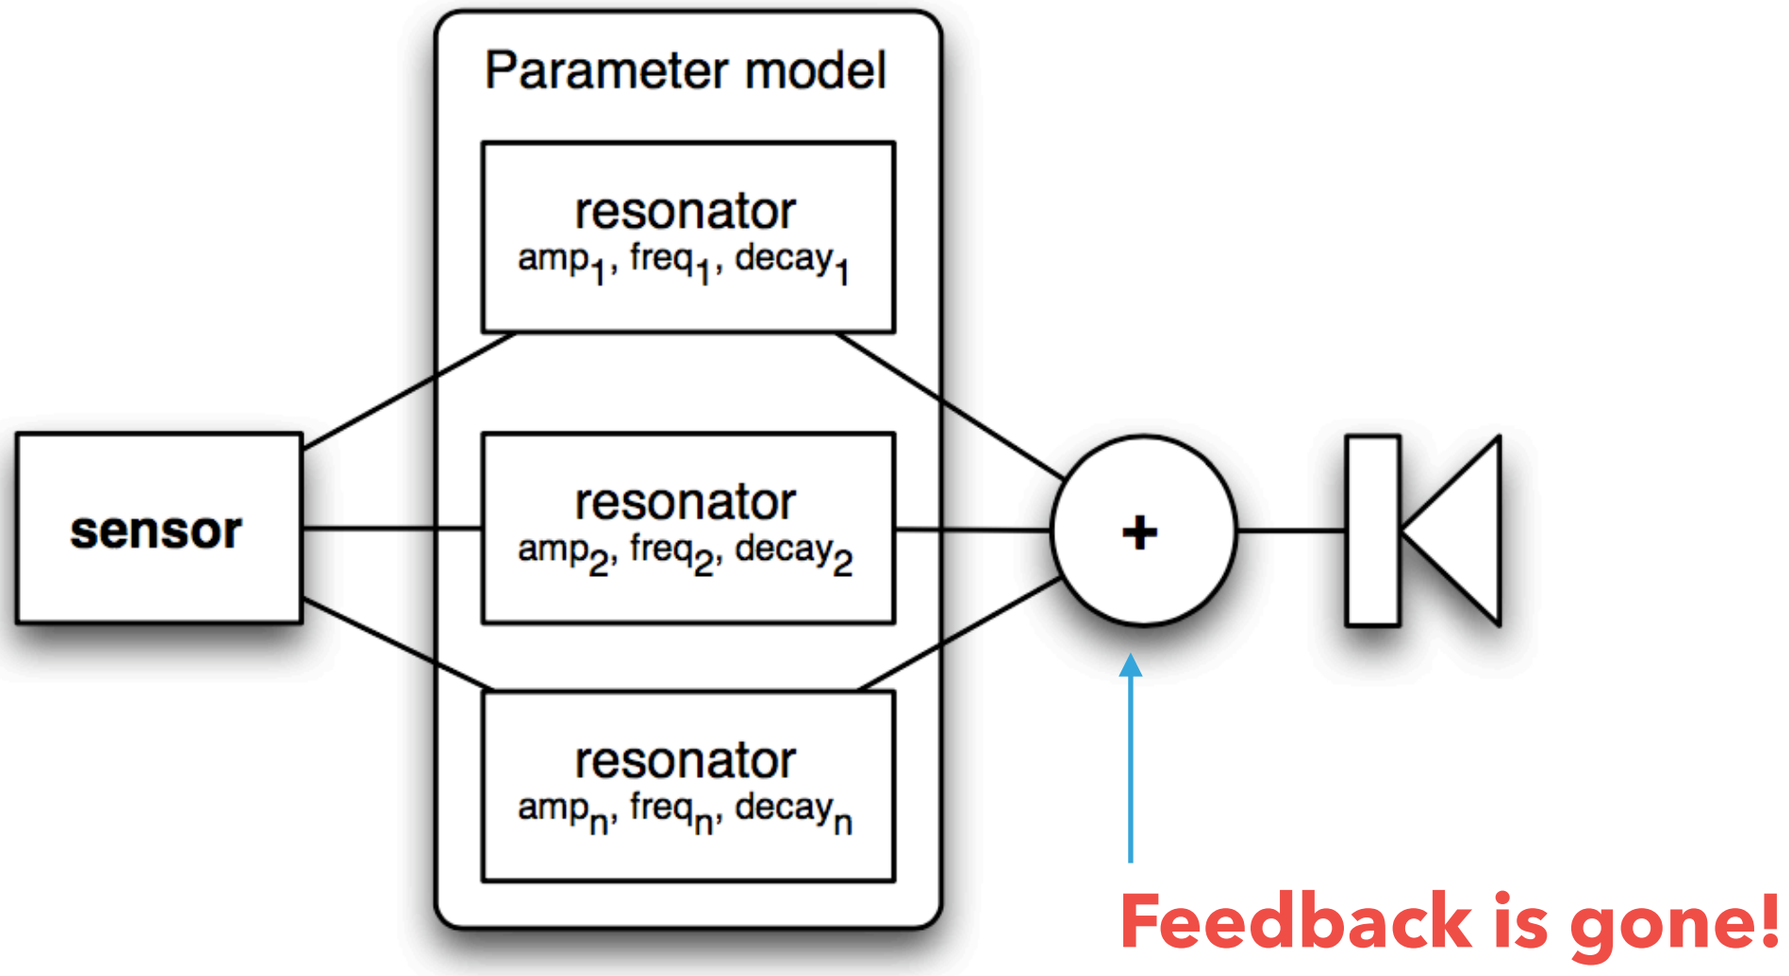

GENERALISED SPECTRAL MODELING

Our model will use a generalised series (harmonic + geometric) for the parameters of each mode, where each variable is connected to a physical property:

$$\sum_{n=1}^{\infty} \frac{1}{n^{\alpha} \cdot \beta^{n} + \gamma}$$

GENERALISED SPECTRAL MODELING

Our model will use a generalised series (harmonic + geometric) for the parameters of each mode, where each variable is connected to a physical property:

$$\sum_{n=1}^{\infty} \frac{1}{n^{\alpha} \cdot \beta^{n} + \gamma}$$

mode number

GENERALISED SPECTRAL MODELING

Our model will use a generalised series (harmonic + geometric) for the parameters of each mode, where each variable is connected to a physical property:

$$\sum_{n=1}^{\infty} \frac{1}{n^{\alpha} \cdot \beta^{n} + \gamma}$$

mode number

harmonicity

GENERALISED SPECTRAL MODELING

Our model will use a generalised series (harmonic + geometric) for the parameters of each mode, where each variable is connected to a physical property:

$$\sum_{n=1}^{\infty} \frac{1}{n^{\alpha} \cdot \beta^{n} + \gamma}$$

mode number

harmonicity

deformation

GENERALISED SPECTRAL MODELING

Our model will use a generalised series (harmonic + geometric) for the parameters of each mode, where each variable is connected to a physical property:

$$\sum_{n=1}^{\infty} \frac{1}{n^{\alpha} \cdot \beta^{n} + \gamma}$$

mode number

harmonicity

deformation

size

CALCULATION OF PARAMETERS

We will split previous series in two parts; one will be used for frequencies and the other for decays:

$$\sum_{n=1}^{\infty} \frac{1}{n^{\alpha}} \qquad \sum_{n=1}^{\infty} \frac{1}{\beta^{n}}$$

CALCULATION OF PARAMETERS

We will split previous series in two parts; one will be used for frequencies and the other for decays:

$$\sum_{n=1}^{\infty} \frac{1}{n^{\alpha}}$$

$$\sum_{n=1}^{\infty} \frac{1}{\beta^{n}}$$

$$f_n = f_0 \cdot n^{\alpha}$$

CALCULATION OF PARAMETERS

We will split previous series in two parts; one will be used for frequencies and the other for decays:

$$\sum_{n=1}^{\infty} \frac{1}{n^{\alpha}} \qquad \sum_{n=1}^{\infty} \frac{1}{\beta^{n}}$$

$$f_n = f_0 \cdot n^{\alpha} \qquad \tau_n = \tau_0 / \beta^{n}$$

QUESTION

What happens if we sum the modes after delaying them independently?

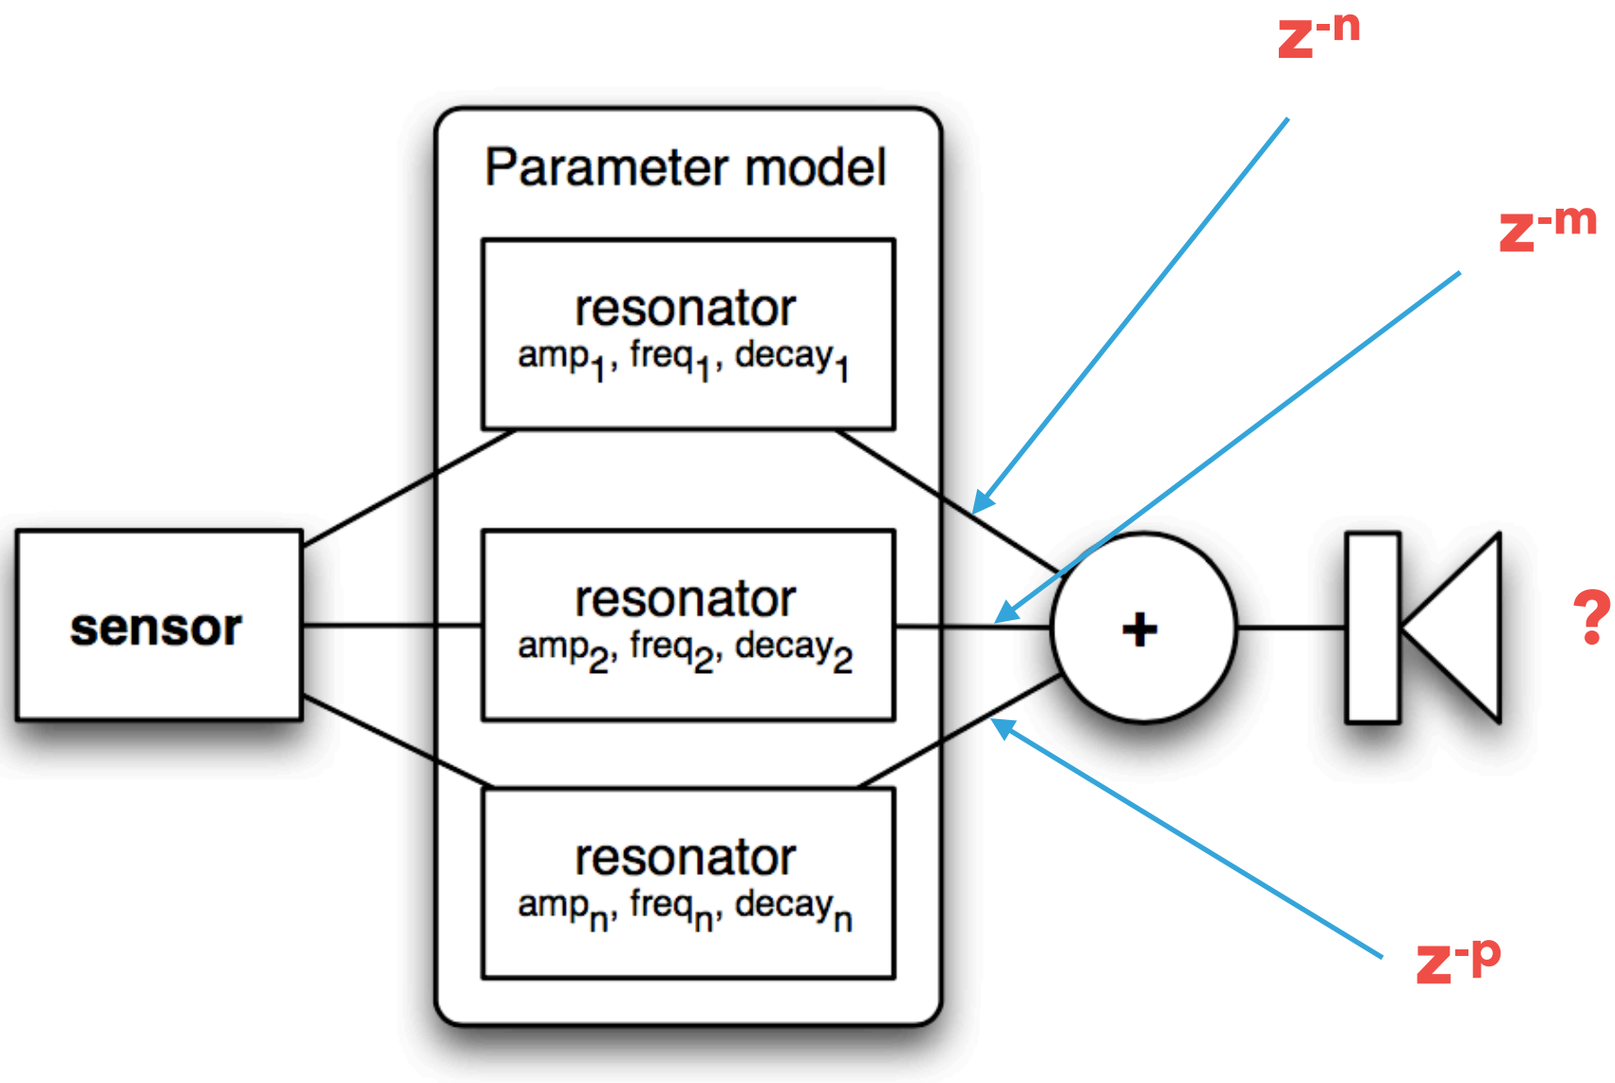

LET'S GO LIVE!

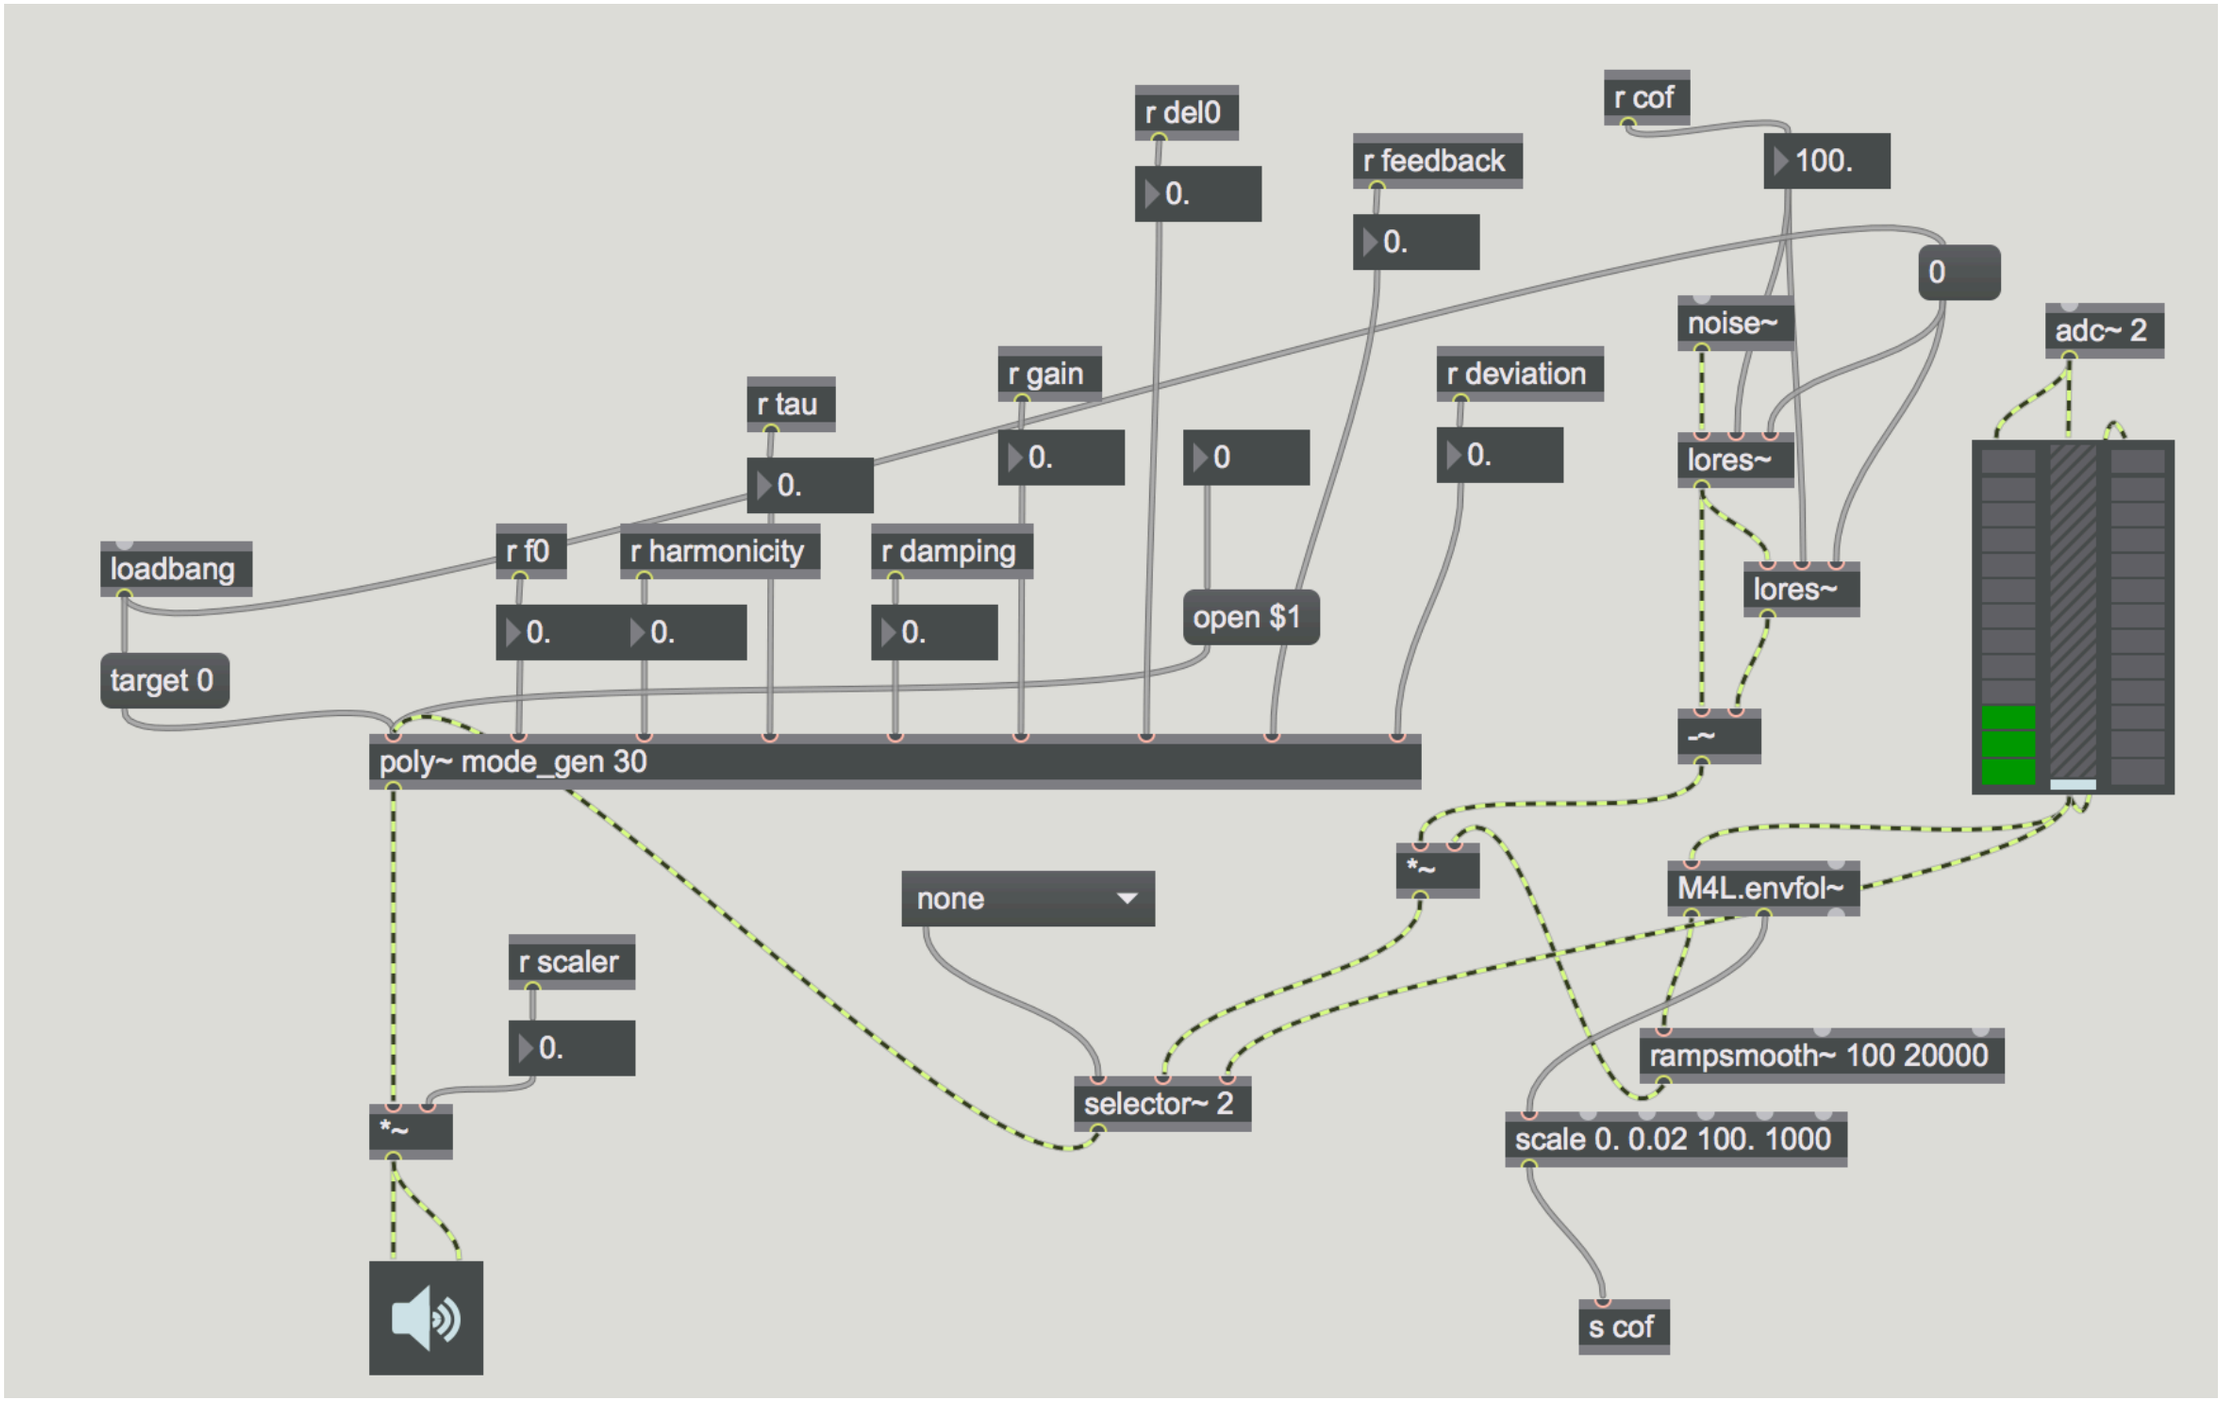
r del0
0.
r feedback
0.
r cof
100.
0
noise~
adc~ 2
r gain
0.
r tau
0.
0
r deviation
0.
lores~
loadbang
r f0
0.
0.
r harmonicity
r damping
0.
open $1
target 0
poly~ mode_gen 30
~~
*~
none
M4L.envfol~
r scaler
0.
rampsmooth~ 100 20000
selector~ 2
*~
scale 0. 0.02 100. 1000
s cof

CAN WE SONIFY THE WORLD?

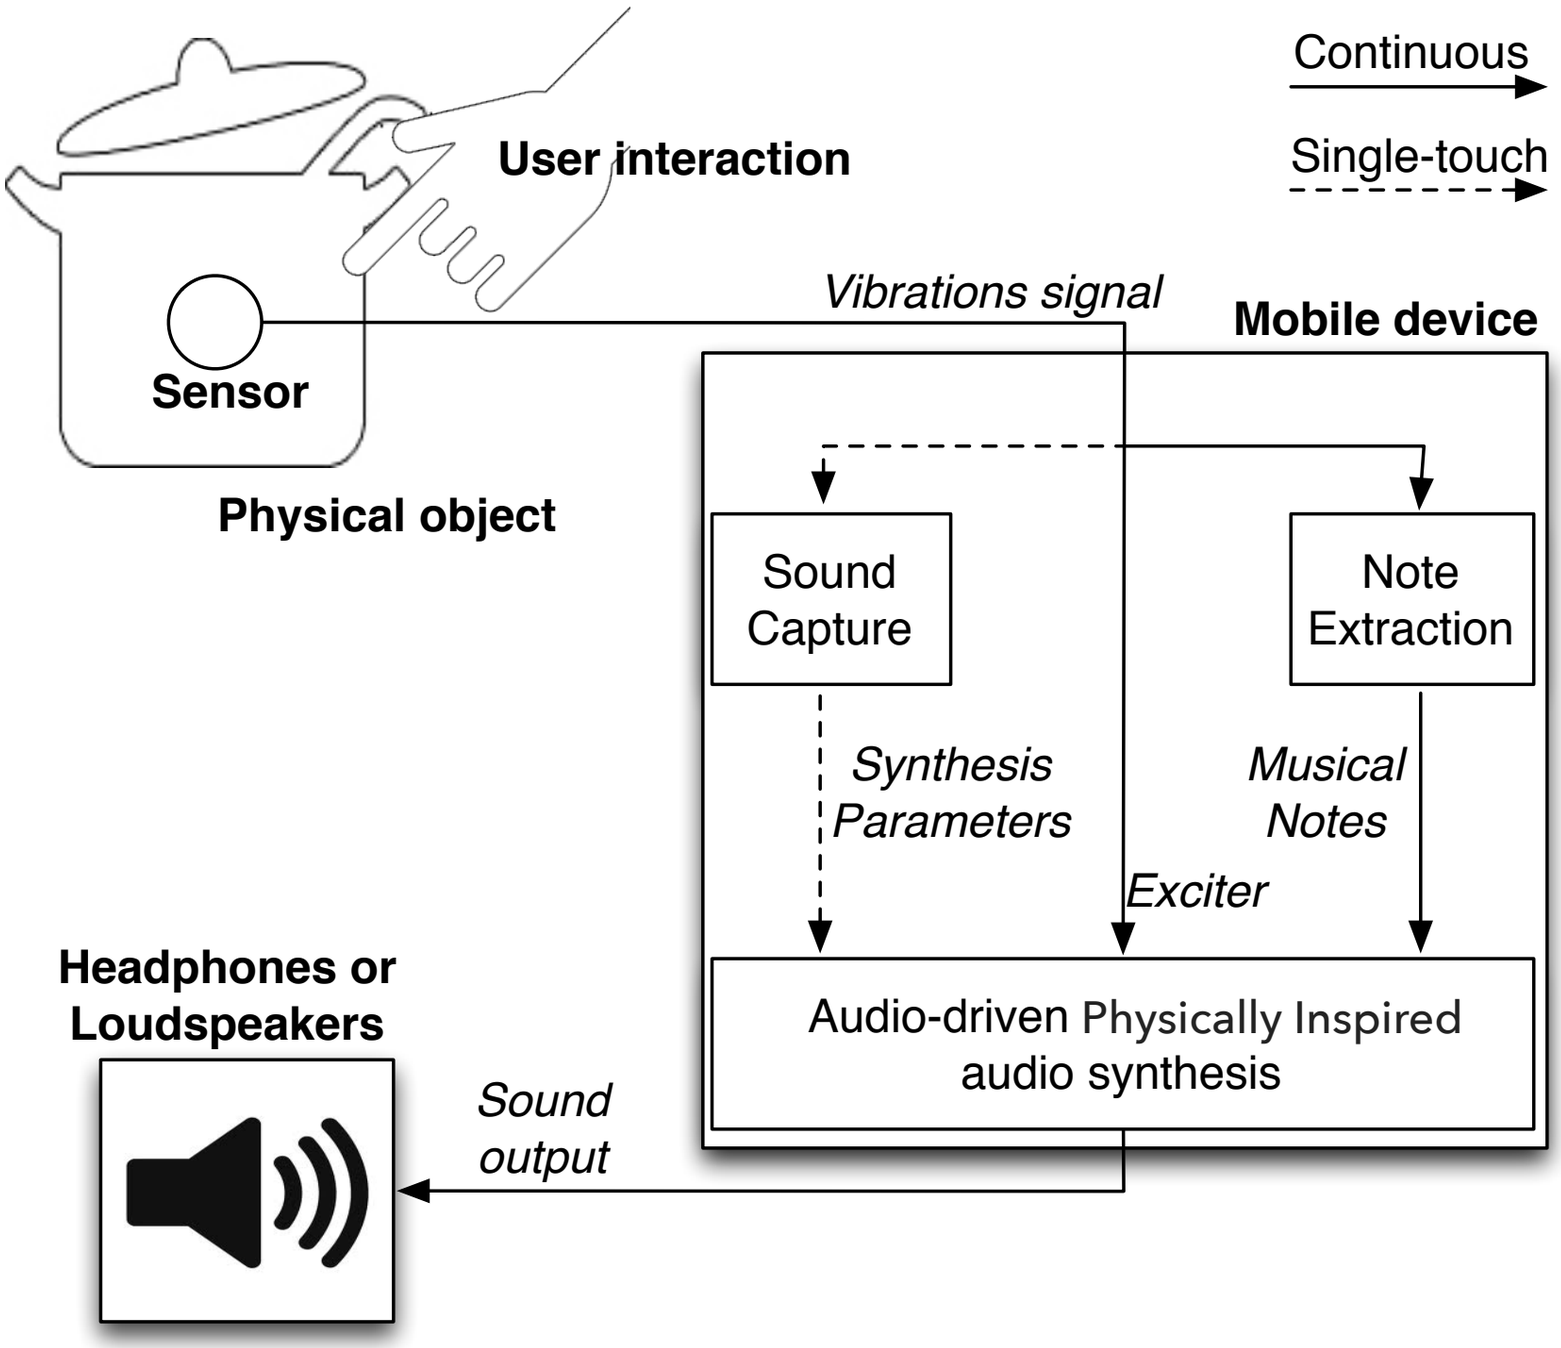

GESTURE MAPPING

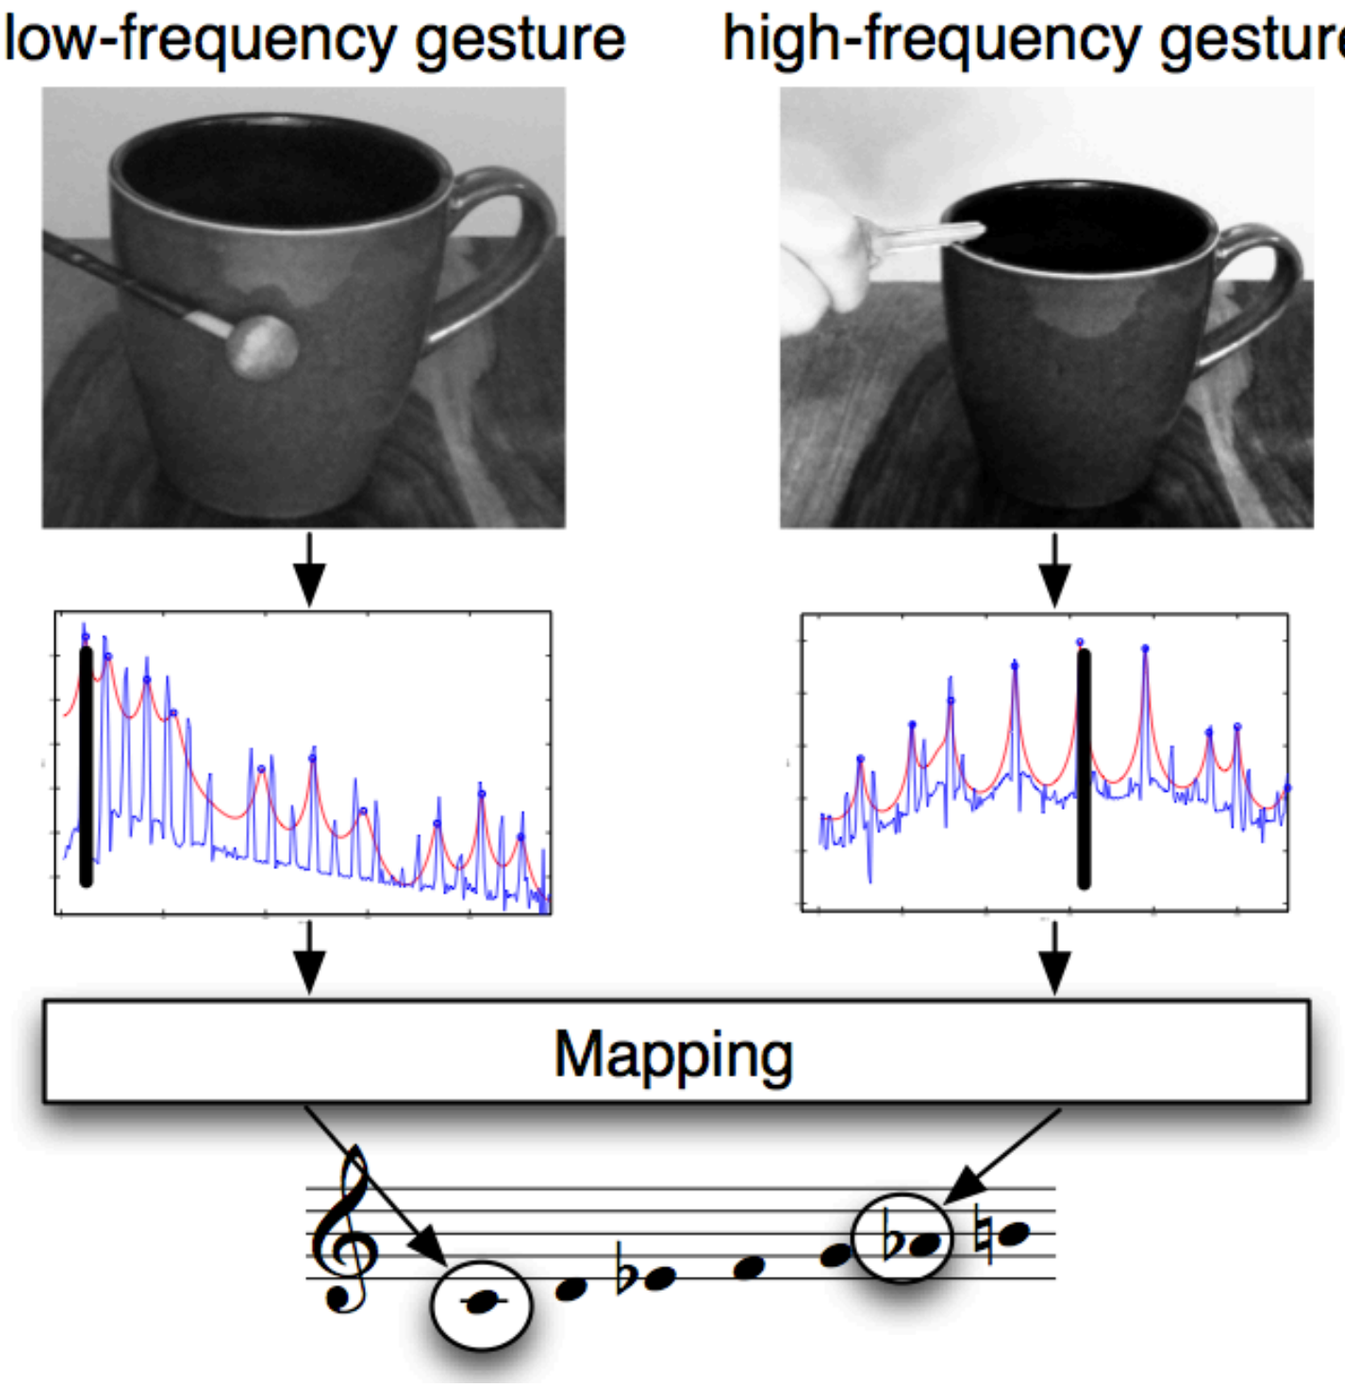

LOW-LEVEL FEATURES FOR GESTURES

Numerical values describing the contents of a signal according to different kinds of inspection: *temporal*, *spectral*, *perceptual*, etc.

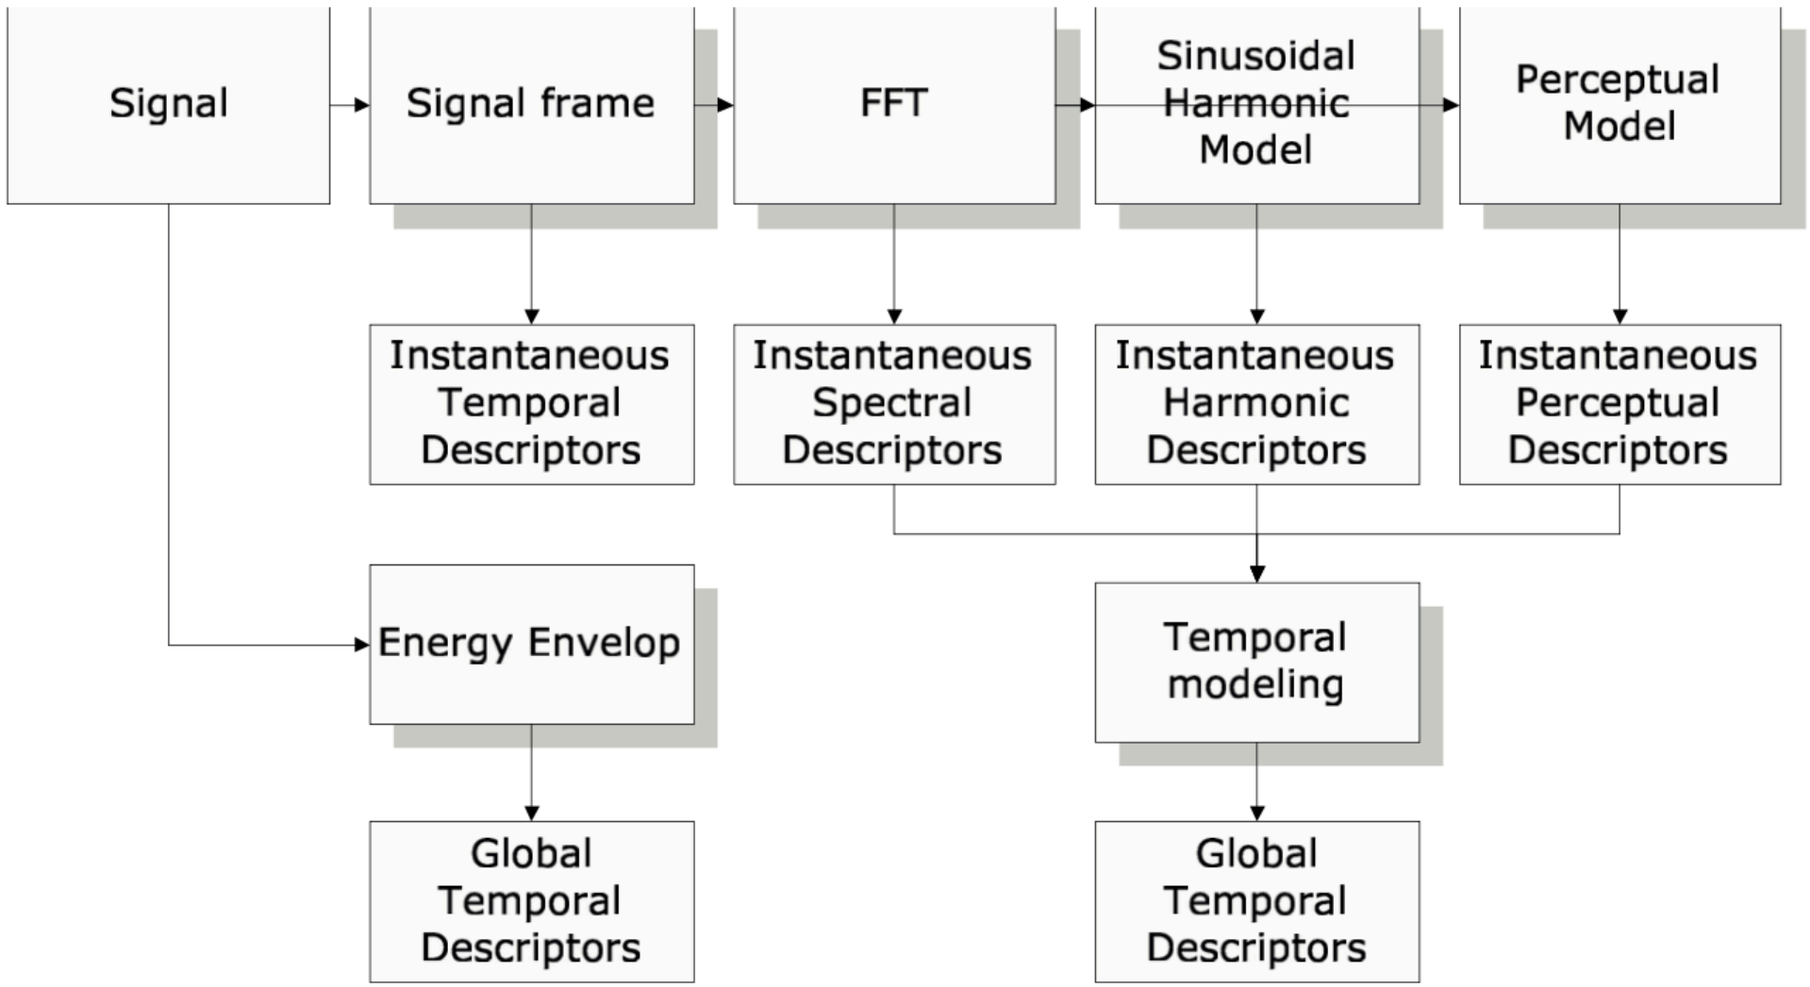

SPECTRAL FEATURES

Spectral centroid (brightness) and spectral spread (bandwidth) are important features:

$$\mu = \int x \cdot p(x) dx.$$

$$\sigma^2 = \int (x - \mu)^2 \cdot p(x) dx.$$

Where *x* are the frequencies of the spectrum and *p(x)* are the respective amplitudes; the spectral centroid is the *weighted average*

LET'S GO LIVE AGAIN!

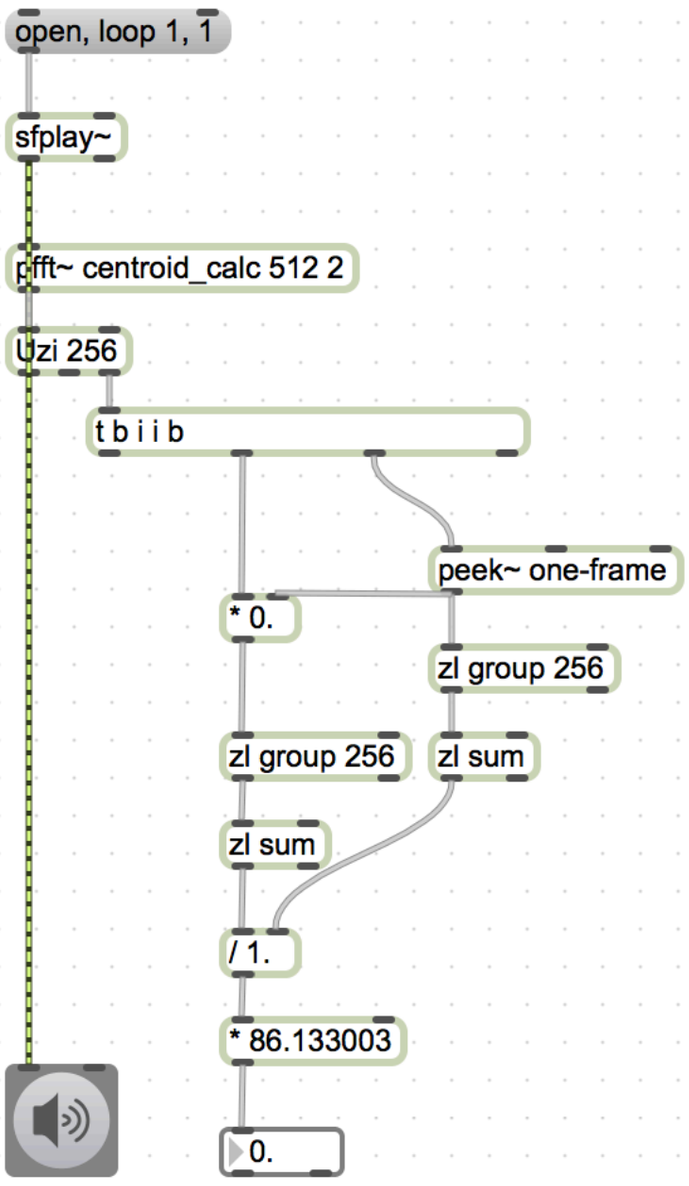

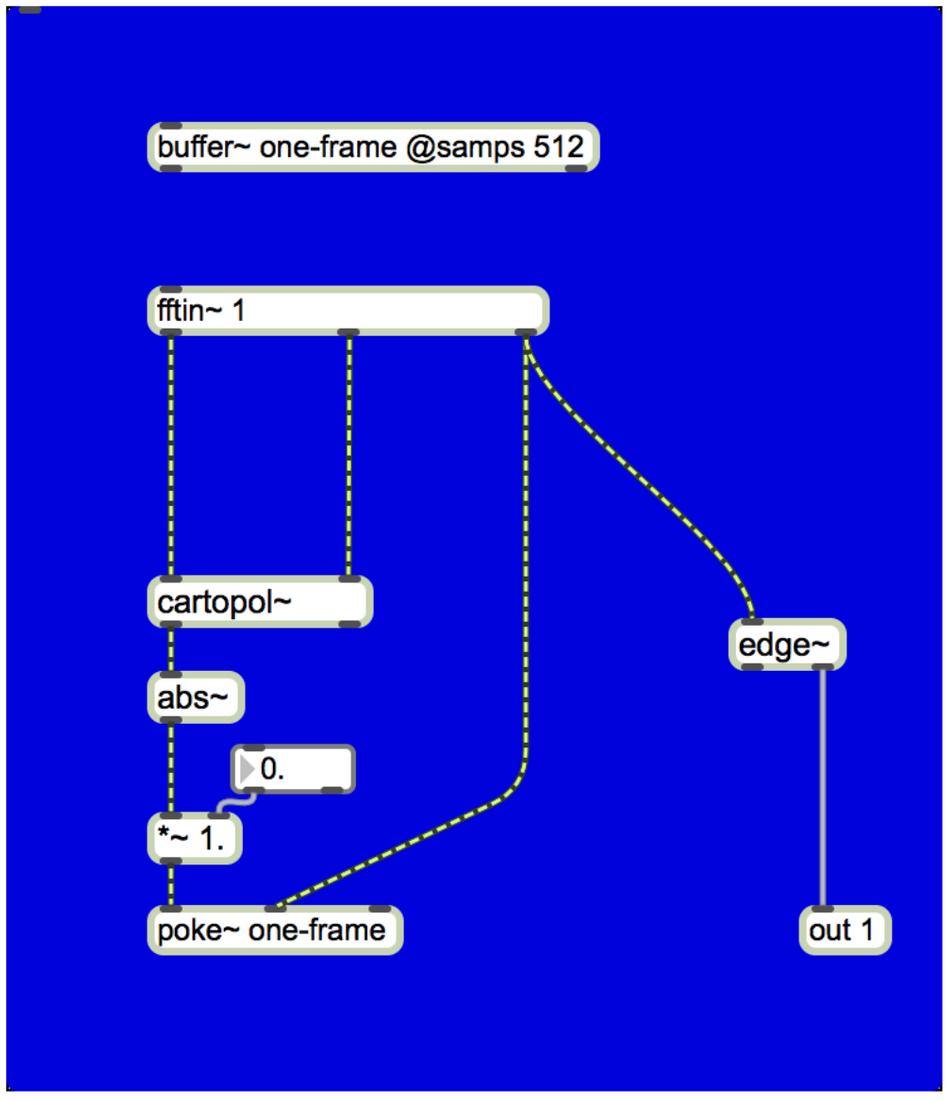

MOGEES


"Mogees' software makes music magic!"
USA TODAY
MOGEESPRO
Turn a tree into a harp.
Turn a table into a drumkit.
Turn a chair into a MIDI controller.
Mogees Pro gives you an entire world of new creative possibilities.
amazon
buy now
Visit Store
The Apps
MOGEES
Transform anything into a musical instrument
Quick start guide
Software download and registration codes
Flight case
Mogees vibration sensor
2 re-washable adhesive pads
3.5mm TRRS to 6.5mm TS jack adapter

MOGEES

INSIDE-OUT

for smart percussions (2017)

commissioned by Ircam and Percussions de Strasbourg

first performance: june 2017, Paris

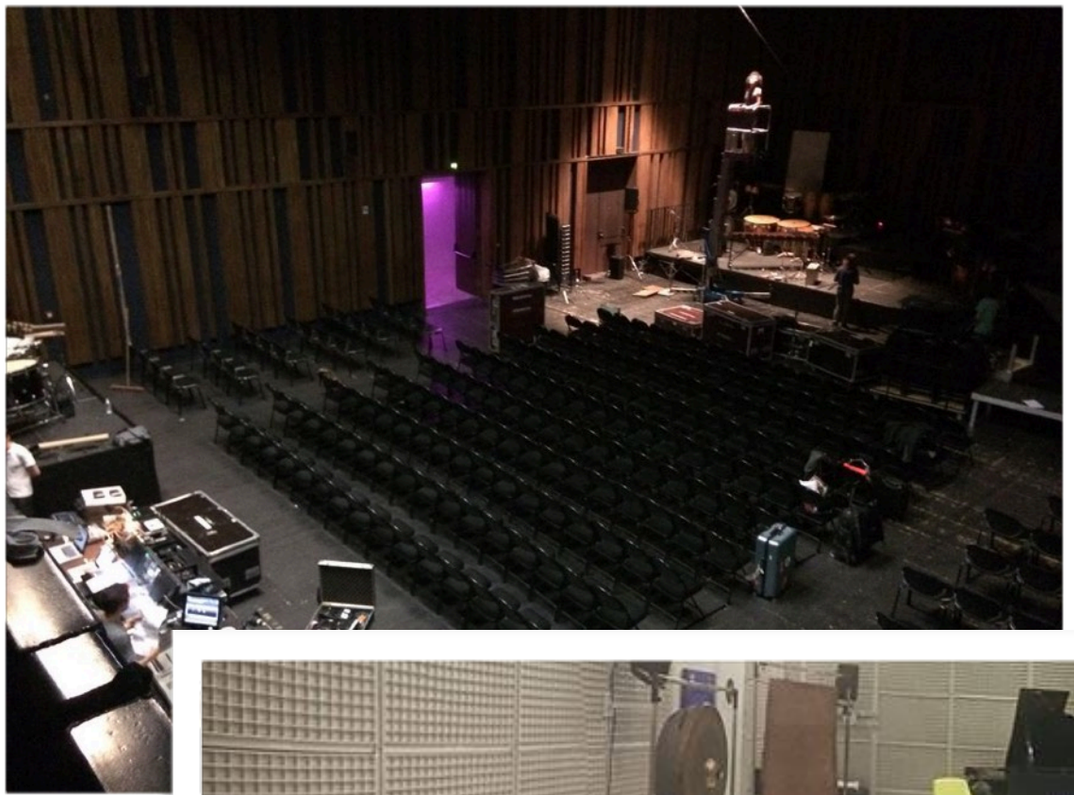

INSIDE-OUT

for smart percussions (2017)

SUMMARY

- Modelling reality means choosing an *abstraction* level (mimesis and katharsis)

SUMMARY

- Modelling reality means choosing an *abstraction* level (mimesis and katharsis)

- Physical modelling synthesis is a flexible framework to model the acoustic behaviours of physical objects

SUMMARY

- Modelling reality means choosing an *abstraction* level (mimesis and katharsis)

- Physical modelling synthesis is a flexible framework to model the acoustic behaviours of physical objects

- Physically inspired synthesis expands this possibility by creating *plausible sounds* by means of sensors and parameter models

SUMMARY

- Modelling reality means choosing an *abstraction* level (mimesis and katharsis)

- Physical modelling synthesis is a flexible framework to model the acoustic behaviours of physical objects

- Physically inspired synthesis expands this possibility by creating *plausible sounds* by means of sensors and parameter models

- Gesture recognition, by means of low-level features, is the key step to create a system for **augmented reality**

GITHUB REPOSITORY OF THIS LECTURE

https://github.com/CarmineCella/Berkeley2018

SELECTED REFERENCES

- C. E. Cella, Generalized series for spectral design, 2013
- C. E. Cella, On physically inspired synthesis of sound, 2012
- Rossing - Fletcher, The physics of musical instruments, 2002
- J. Smith, Physical audio signal processing, 2006
- M. Puckette, The theory and techniques of electronic music, 2006

ANY QUESTIONS?

carmine.emanuele.cella@gmail.com