

## 武汉今仙电机有限公司


노ፄ **ያ**ሌ ታጽ **ለዩህ** ሴት ችኤ WHTG-QR--8. 2. 7-03 **检查成绩表** 

WHIG-QK-8, 2, 7-03 5 5 5 7 19 19 19 19 19 19 19 19 19 19 19 19 19												
□认定车	□ 段确	口品	确 口 🛭	量确 □ 量产		制品颜色						
机种	顾客	北欧佑	1 田 田 仝 山	·汽车零部件有	加入司	零件编号	81270-T9A4-Y010-M1-0001					
2GW/2BK		风仪》	<b>ビ及心主</b> ア	771十零即17代	] bk.\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\		(2311-397-810)					
供应商	顾客	松杏口期	交货日期	生产批号	数量(pcs)	零件名称						
检验员 审核	审核						SLIDE ADJR INN R,FR SEAT (NOR)					
3/4%				17612A	5		(1.011)					

大路



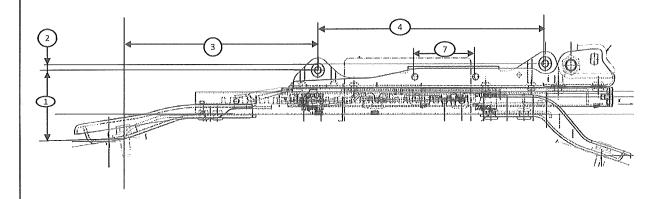



综合判定: □合格 □不合格 □参考

## 武汉今仙电机有限公司 检查成绩表

<del></del>								页码	: 2/4
N O	检查	规格值	检查工具	检查结果					
·	项目	720111 15.	立旦エバ	1	2	3	4	5	判定
1	尺寸1	75±1.5mm	高度尺	70.15	6.13	2017	0.15	014	ok
2	尺寸2	6.7±0.5mm	高度尺	O	+0.04	tooz	to.Ot	202	oK
3	尺寸3	240.6±1mm	高度尺	-0.0 }	2.08	-0.1	7208	-210	ok
4	尺寸4	261.7 $\pm$ 0.5mm	高度尺	-0.15	B14	-0.08	0.14	a16	ok
5	尺寸5	12.6 $\pm$ 0.5mm	高度尺	ta20	40,18	10.19	tazl	ta18	ok
6	尺寸6	17.7±1mm	高度尺	-0.12	0.1	214	All	-013	ok
7	尺寸7	70±0.5mm	游标卡尺	10.04	10.04	1204	tao4	taole	ok
8	安全带螺母焊接状况	不可有焊接位置 偏移、部品浮起	目视	olc	olc	υlc	ok	ok<	ا داد
9	安全带螺母剥离扭力	42, 2N*m以上	扭力扳手	£7.7	62.4	58.)	54.4	64.5	0/<
	1910								
						очуровые			
	NAME OF THE PROPERTY OF THE PR				2 2000 200				
<u> </u> 备注	<b>:</b> :	<u> </u>							