

Table 2-1. OPT3001 Pinout

| BoosterPack Plug-in Module Header Connection | Pin Function |
|----------------------------------------------|----------------------|
| J1.8 | OPT3001 interrupt |
| J1.9 ⁽¹⁾ | I ² C SCL |
| J1.10 ⁽¹⁾ | I ² C SDA |

(1) Pin is multiplexed with the I²C communication lines of the TMP006.

Pinout Diagram for your BoosterPack

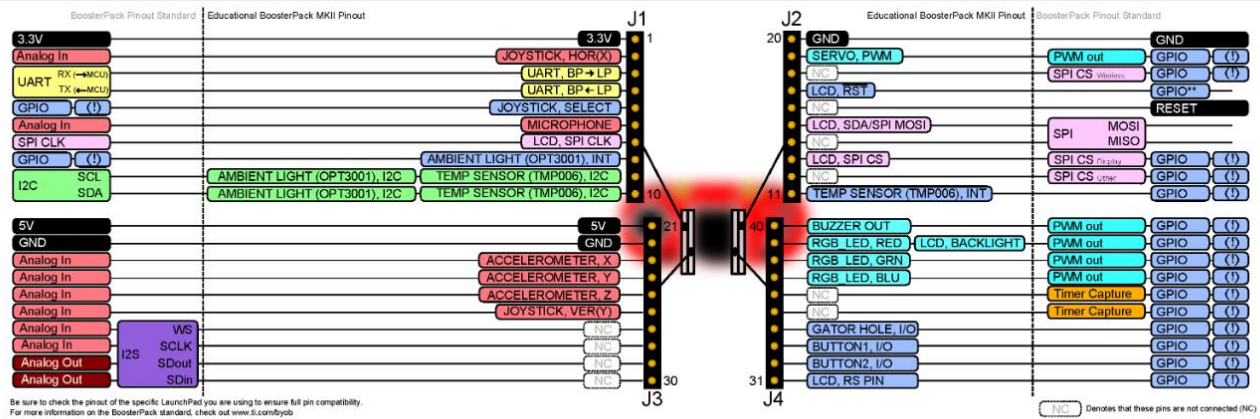


Figure 2-2. BoosterPack Plug-in Module Pinout