

Control Systems

G V V Sharma*

CONTENTS

Abstract—This manual is an introduction to control systems based on GATE problems. Links to sample Python codes are available in the text.

Download python codes using

```
svn co https://github.com/gadepall/school/trunk/
control/codes
```

1 STABILITY

1.1 Second order System

1.1. Consider the following second order system with the transfer function

$$G(s) = \frac{1}{1 + 2s + s^2} \quad (1.1.1)$$

Is the system stable?

Solution: The poles of

$$G(s) = \frac{1}{1 + 2s + s^2} \quad (1.1.2)$$

are at

$$s = -1 \quad (1.1.3)$$

i.e., the left half of s-plane. Hence the system is stable.

1.2. Find and sketch the step response $c(t)$ of the system.

Solution: For step-response, we take input as unit-step function $u(t)$

$$C(s) = U(s).G(s) = \left[\frac{1}{s} \right] \left[\frac{1}{1 + 2s + s^2} \right] \quad (1.2.1)$$

$$= \frac{1}{s(1 + s)^2} \quad (1.2.2)$$

$$= \frac{1}{s} - \frac{1}{(1 + s)} - \frac{1}{(1 + s)^2} \quad (1.2.3)$$

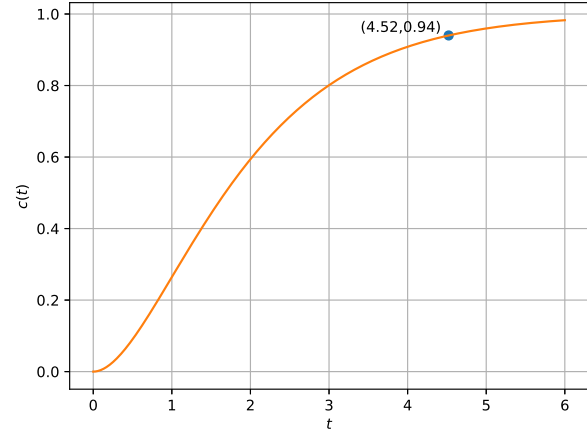


Fig. 1.2

Taking the inverse Laplace transform,

$$c(t) = L^{-1} \left[\frac{1}{s} \right] - L^{-1} \left[\frac{1}{1 + s} \right] - L^{-1} \left[\frac{1}{(1 + s)^2} \right] \quad (1.2.4)$$

$$= (1 - e^{-t} - te^{-t})u(t) \quad (1.2.5)$$

The following code plots $c(t)$ in Fig. 1.2

```
codes/ee18btech11002/plot.py
```

1.3. Find the steady state response of the system using the final value theorem. Verify using 1.2.5

Solution: To know the steady response value of $c(t)$, using final value theorem,

$$\lim_{t \rightarrow \infty} c(t) = \lim_{s \rightarrow 0} sC(s) \quad (1.3.1)$$

We get

$$\lim_{s \rightarrow 0} s \left(\frac{1}{s} \right) \left(\frac{1}{1 + s + s^2} \right) = \frac{1}{1 + 0 + 0} = 1 \quad (1.3.2)$$

Using 1.2.5,

$$\lim_{t \rightarrow \infty} c(t) = \lim_{t \rightarrow \infty} (1 - e^{-t} - te^{-t})u(t) \quad (1.3.3)$$

$$= (1 - 0 - 0) = 1 \quad (1.3.4)$$

*The author is with the Department of Electrical Engineering, Indian Institute of Technology, Hyderabad 502285 India e-mail: gadepall@iith.ac.in. All content in this manual is released under GNU GPL. Free and open source.

- 1.4. Find the time taken for the system output $c(t)$ to reach 94% of its steady state value.

Solution: Now, 94% of 1 is 0.94, so we should now solve for a positive t such that

$$1 - e^{-t} - te^{-t} = 0.94 \quad (1.4.1)$$

The following code

```
codes/ee18btech11002/solution.py
```

provides the necessary solution as

$$t = 4.5228 \quad (1.4.2)$$

2 ROUTH HURWITZ CRITERION

- 2.1. Consider a unity feedback system as shown in Fig. 2.1, with an integral compensator $\frac{k}{s}$ and open-loop transfer function

$$G(s) = \frac{1}{s^2 + 3s + 2} \quad (2.1.1)$$

where k greater than 0. Find its closed loop transfer function.

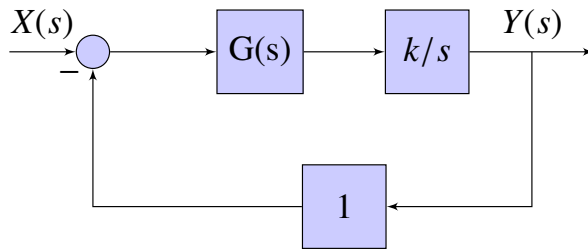


Fig. 2.1

Solution: $\because H(s) = 1$ in Fig. 2.1, due to unity feedback, the transfer function is given by

$$\frac{Y(s)}{X(s)} = \frac{G(s)}{1 + G(s)H(s)} \quad (2.1.2)$$

$$\Rightarrow T(s) = \frac{k}{s^3 + 3s^2 + 2s} \quad (2.1.3)$$

- 2.2. Find the characteristic equation for $G(s)$.

Solution: The characteristic equation is

$$1 + G(s)H(s) = 0 \quad (2.2.1)$$

$$\Rightarrow 1 + \left[\frac{k}{s^3 + 3s^2 + 2s} \right] = 0 \quad (2.2.2)$$

$$\text{or, } s^3 + 3s^2 + 2s + k = 0 \quad (2.2.3)$$

- 2.3. Using the tabular method for the Routh hurwitz criterion, find $k > 0$ for which there are two poles of unity feedback system on $j\omega$ axis.

Solution: This criterion is based on arranging the coefficients of characteristic equation into an array called Routh array. For any characteristic equation

$$q(s) = a_0s^n + a_1s^{n-1} + \dots + a_{n-1}s + a_n = 0 \quad (2.3.1)$$

the Routh array can be constructed as

$$\begin{array}{c|cccc} s^n & a_0 & a_2 & a_4 & \dots \\ s^{n-1} & a_1 & a_3 & a_5 & \dots \\ s^{n-2} & b_1 & b_2 & b_3 & \dots \\ \vdots & \vdots & \vdots & \vdots & \ddots \end{array} \quad (2.3.2)$$

where

$$b_1 = \frac{a_1a_2 - a_0a_3}{a_1} \quad (2.3.3)$$

$$b_2 = \frac{a_1a_4 - a_0a_5}{a_1} \quad (2.3.4)$$

$$c_1 = \frac{b_1a_3 - a_1b_2}{b_1} \quad (2.3.5)$$

$$c_2 = \frac{b_1a_5 - a_1b_3}{b_1} \quad (2.3.6)$$

For poles to lie on imaginary axis any one entire row of hurwitz matrix should be zero. Constructing the routh array for the characteristic equation obtained in 2.2.1,

$$s^3 + 3s^2 + 2s + k = 0 \quad (2.3.7)$$

$$\begin{array}{c|cc} s^3 & 1 & 2 \\ s^2 & 3 & k \\ s^1 & \frac{6-k}{3} & 0 \\ s^0 & k & 0 \end{array} \quad (2.3.8)$$

For poles on $j\omega$ axis any one of the row should be zero.

$$\therefore \frac{6-k}{3} = 0 \text{ or } k = 0 \quad (2.3.9)$$

$$\Rightarrow k = 6 \quad \because k > 0 \quad (2.3.10)$$

- 2.4. Repeat the above using the determinant method.

Solution: The Routh matrix can be expressed

as

$$\mathbf{R} = \begin{pmatrix} a_0 & a_2 & a_4 & \cdots \\ a_1 & a_3 & a_5 & \cdots \\ 0 & a_0 & a_2 & \cdots \\ 0 & a_1 & a_3 & \cdots \\ \vdots & \vdots & \vdots & \ddots & \ddots \end{pmatrix} \quad (2.4.1)$$

and the corresponding Routh determinants are

$$D_1 = |a_0| \quad (2.4.2)$$

$$D_2 = \begin{vmatrix} a_0 & a_2 \\ a_1 & a_3 \end{vmatrix} \quad (2.4.3)$$

$$D_3 = \begin{vmatrix} a_0 & a_2 & a_4 \\ a_1 & a_3 & a_5 \\ 0 & a_0 & a_2 \end{vmatrix} \quad (2.4.4)$$

$$\dots \quad (2.4.5)$$

If at least any one of the Determinants are zero then the poles lie on imaginary axes. From (2.2.1),

$$D_1 = 1 \neq 0 \quad (2.4.6)$$

$$D_2 = \begin{vmatrix} 1 & 2 \\ 3 & k \end{vmatrix} = k - 6 = 0 \implies k = 6 \quad (2.4.7)$$

2.5. Verify your answer using a python code for both the determinant method as well as the tabular method.

Solution: The following code

```
codes/ee18btech11005/ee18btech11005.py
```

provides the necessary solution.

- For the system to be stable all coefficients should lie on left half of s-plane. Because if any pole is in right half of s-plane then there will be a component in output that increases without bound, causing system to be unstable. All the coefficients in the characteristic equation should be positive. This is necessary condition but not sufficient. Because it may have poles on right half of s plane. Poles are the roots of the characteristic equation.
- A system is stable if all of its characteristic modes go to finite value as t goes to infinity. It is possible only if all the poles are on the left half of s plane. The characteristic equation should have negative roots only. So the first column should always be greater than zero. That means no sign changes.
- A system is unstable if its characteristic

modes are not bounded. Then the characteristic equation will also have roots in the right side of s-plane. That means it has sign changes.

3 STATE-SPACE MODEL

3.1. State the general model of a state space system specifying the dimensions of the matrices and vectors.

Solution:

$$\dot{\mathbf{x}}(t) = \mathbf{A}\mathbf{x}(t) + \mathbf{B}\mathbf{u}(t) \quad (3.1.1)$$

$$\mathbf{y}(t) = \mathbf{C}\mathbf{x}(t) + \mathbf{D}\mathbf{u}(t) \quad (3.1.2)$$

where \mathbf{A} , \mathbf{B} , \mathbf{C} are matrices, \mathbf{D} is scalar, $\mathbf{u}(t)$ is input to the system and $\mathbf{y}(t)$ is the output of the system.

3.2. Find the transfer function $\mathbf{H}(s)$ for the general system. Taking Laplace transform on both sides we have the following equations

$$sIX(s) = AX(s) + BU(s) \quad (3.2.1)$$

$$(sI - A)X(s) = BU(s) \quad (3.2.2)$$

$$X(s) = (sI - A)^{-1}BU(s) \quad (3.2.3)$$

and

$$Y(s) = CX(s) + DIU(s) \quad (3.2.4)$$

substituting 0.1.1 in this equation gives

$$Y(s) = (C(sI - A)^{-1}B + DI)U(s) \quad (3.2.5)$$

For a SISO (single input single output) system,

$$H(s) = \frac{Y(s)}{U(s)} = C(sI - A)^{-1}B + DI \quad (3.2.6)$$

3.3. Given

$$H(s) = \frac{1}{s^3 + 3s^2 + 2s + 1} \quad (3.3.1)$$

$$b1 = \begin{vmatrix} 0 & 0 & 1 \end{vmatrix} \quad (3.3.2)$$

$$b1^T = B \quad (3.3.3)$$

and $D=0$, find A and C . **Solution:** In the above question $D=0$, so our transfer function becomes

$$C(sI - A)^{-1}B = \frac{1}{s^3 + 3s^2 + 2s + 1} \quad (3.3.4)$$

FINDING TRANSFER FUNCTION

so

$$\dot{X}(t) = AX(t) + BU(t) \quad (3.3.5)$$

$$Y(t) = CX(t) + DU(t) \quad (3.3.6)$$

by applying laplace transforms on both sides of equation 1 we get

$$s.X(s) - X(0) = A.X(s) + B.U(s)$$

$$s.X(s) - A.X(s) = B.U(s) + X(0)$$

$$(sI - A)X(s) = X(0) + B.U(s)$$

$$X(s) = X(0)([sI - A])^{-1} + (([sI - A])^{-1}B)U(s)$$

Laplace transform of equation 2 and sub X(s)

$$Y(s) = C.X(s) + D.U(s)$$

$$Y(s) = C.[X(0)([sI - A])^{-1} + (([sI - A])^{-1}B)U(s)] + DU(s)$$

$$\text{If } X(0)=0$$

$$\text{then } Y(s) = C[([sI - A])^{-1}B)U(s)] + DU(s)$$

$$\frac{Y(s)}{U(s)} = C[([sI - A])^{-1}B) + D = H(s)$$

As we know that

$$Y(s) = H(s) \times U(s) = \left(\frac{1}{s^3 + 3s^2 + 2s + 1} \right) \times U(s)$$

$$H(s) = \frac{Y(s)}{U(s)} = \left(\frac{\frac{Y(s)}{x_1(s)}}{\frac{U(s)}{x_1(s)}} \right) = \frac{1}{s^3 + 3s^2 + 2s + 1}$$

$$\text{let } x_1(s) = \frac{U(s)}{s^3 + 3s^2 + 2s + 1}$$

$$Y(s) = x_1(s) \times 1$$

$$s^3 x_1(s) + 3s^2 x_1(s) + 2s x_1(s) + x_1(s) = U(s) \quad (3.3.7)$$

Taking inverse laplace transform we get

$$\ddot{x}_1(t) + \dot{x}_1(t) + x_1(t) = U(t)$$

$$\dot{x}_1 = x_2$$

$$\ddot{x}_1 = \dot{x}_2 = x_3$$

$$\ddot{x}_1 = \ddot{x}_2 = \dot{x}_3$$

so equation 1.1.4 can be written as

$$\begin{bmatrix} s x_1(s) \\ s^2 x_1(s) \\ s^3 x_1(s) \end{bmatrix} = \begin{bmatrix} 0 & 1 & 0 \\ 0 & 0 & 1 \\ -1 & -2 & -3 \end{bmatrix} \times \begin{bmatrix} x_1(s) \\ s x_1(s) \\ s^2 x_1(s) \end{bmatrix} + \begin{bmatrix} 0 \\ 0 \\ 1 \end{bmatrix} \times U \quad (3.3.8)$$

taking inverse laplace transform

$$\begin{bmatrix} \dot{x}_1 \\ \dot{x}_2 \\ \dot{x}_3 \end{bmatrix} = \begin{bmatrix} 0 & 1 & 0 \\ 0 & 0 & 1 \\ -1 & -2 & -3 \end{bmatrix} \times \begin{bmatrix} x_1 \\ x_2 \\ x_3 \end{bmatrix} + \begin{bmatrix} 0 \\ 0 \\ 1 \end{bmatrix} \times U \quad (3.3.9)$$

therefore

$$A = \begin{bmatrix} 0 & 1 & 0 \\ 0 & 0 & 1 \\ -1 & -2 & -3 \end{bmatrix} \quad (3.3.10)$$

Since $Y(s) = x_1(s) \times \text{numerator}$
therefore $Y(s) = x_1(s)$

$$(3.3.11)$$

$$Y = \begin{bmatrix} 1 & 0 & 0 \end{bmatrix} \times \begin{bmatrix} x_1(s) \\ s x_1(s) \\ s^2 x_1(s) \end{bmatrix} \quad (3.3.12)$$

taking inverse laplace transform

$$(3.3.13)$$

$$Y = \begin{bmatrix} 1 & 0 & 0 \end{bmatrix} \times \begin{bmatrix} x_1 \\ x_2 \\ x_3 \end{bmatrix} \quad (3.3.14)$$

$$C = \begin{bmatrix} 1 & 0 & 0 \end{bmatrix} \quad (3.3.15)$$

4 COMPENSATORS

5 NYQUIST PLOT