Speaker

Hsi-Pin Ma

http://lms.nthu.edu.tw/course/38127
Department of Electrical Engineering
National Tsing Hua University

Pmod I2S: Stereo Audio Output

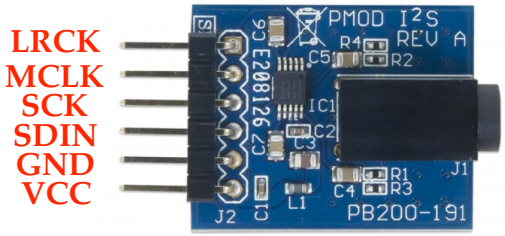

Basys3: Pmod Pin-Out Diagram

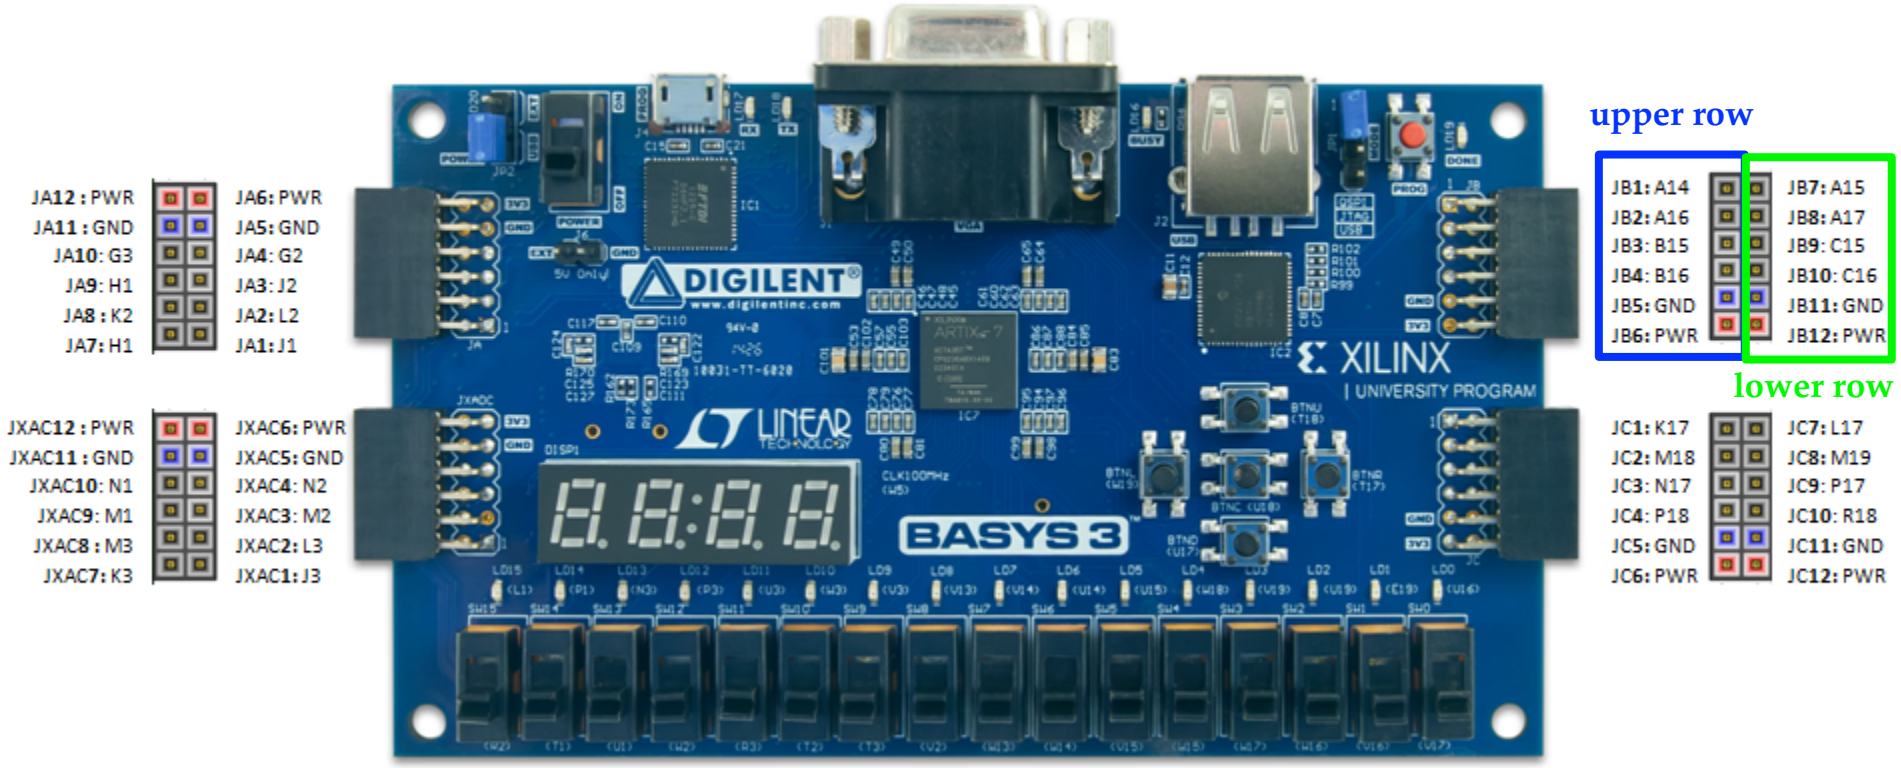

Speaker

- Control the DAC (digital to analog converter) CS4344

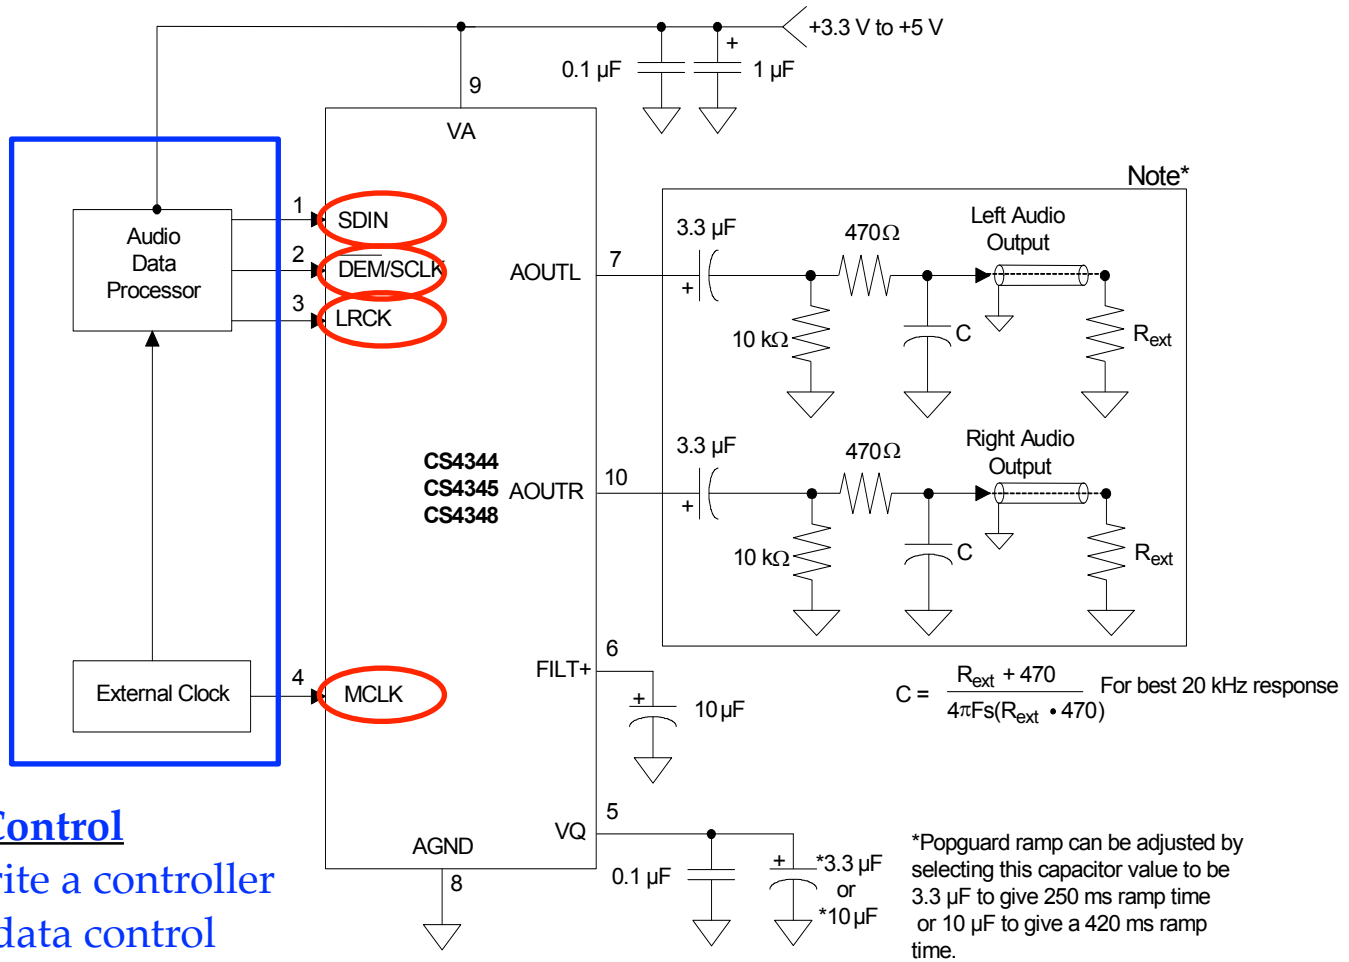

Speaker Control

Should write a controller for audio data control (output SDIN, LRCK, MCLK, SCK)

Speaker

- Control the DAC (digital to analog converter) CS4344
  - LRCK (Left-Right Clock, or Word Select (WS) Clock, or Sample Rate (Fs) Clock) controls the sequence (left or right) of the serial stereo output 25MHz/128 (~192kHz)
  - MCLK (Master Clock) synchronizes the audio data transmission 25MHz (~24.5760MHz)
  - MCLK/LRCK must be an integer ratio 128
  - Serial Clock (SCK) controls the shifting of data into the input data buffers (32*Fs) 25MHz/128*32 = 25MHz/4

LRCK (kHz)	MCLK (MHz)									
	64x	96x	128x	192x	256x	384x	512x	768x	1024x	1152x
32	-	-	-	-	8.1920	12.2880	-	-	32.7680	36.8640
44.1	-	-	-	-	11.2896	16.9344	22.5792	33.8680	45.1580	-
48	-	-	-	-	12.2880	18.4320	24.5760	36.8640	49.1520	-
64	-	-	8.1920	12.2880	-	-	32.7680	49.1520	-	-
88.2	-	-	11.2896	16.9344	22.5792	33.8680	-	-	-	-
96	-	-	12.2880	18.4320	24.5760	36.8640	-	-	-	-
128	8.1920	12.2880	-	-	32.7680	49.1520	-	-	-	-
176.4	11.2896	16.9344	22.5792	33.8680	-	-	-	-	-	-
192	12.2880	18.4320	24.5760	36.8640	-	-	-	-	-	-
Mode	QSM				DSM		SSM			

Speaker

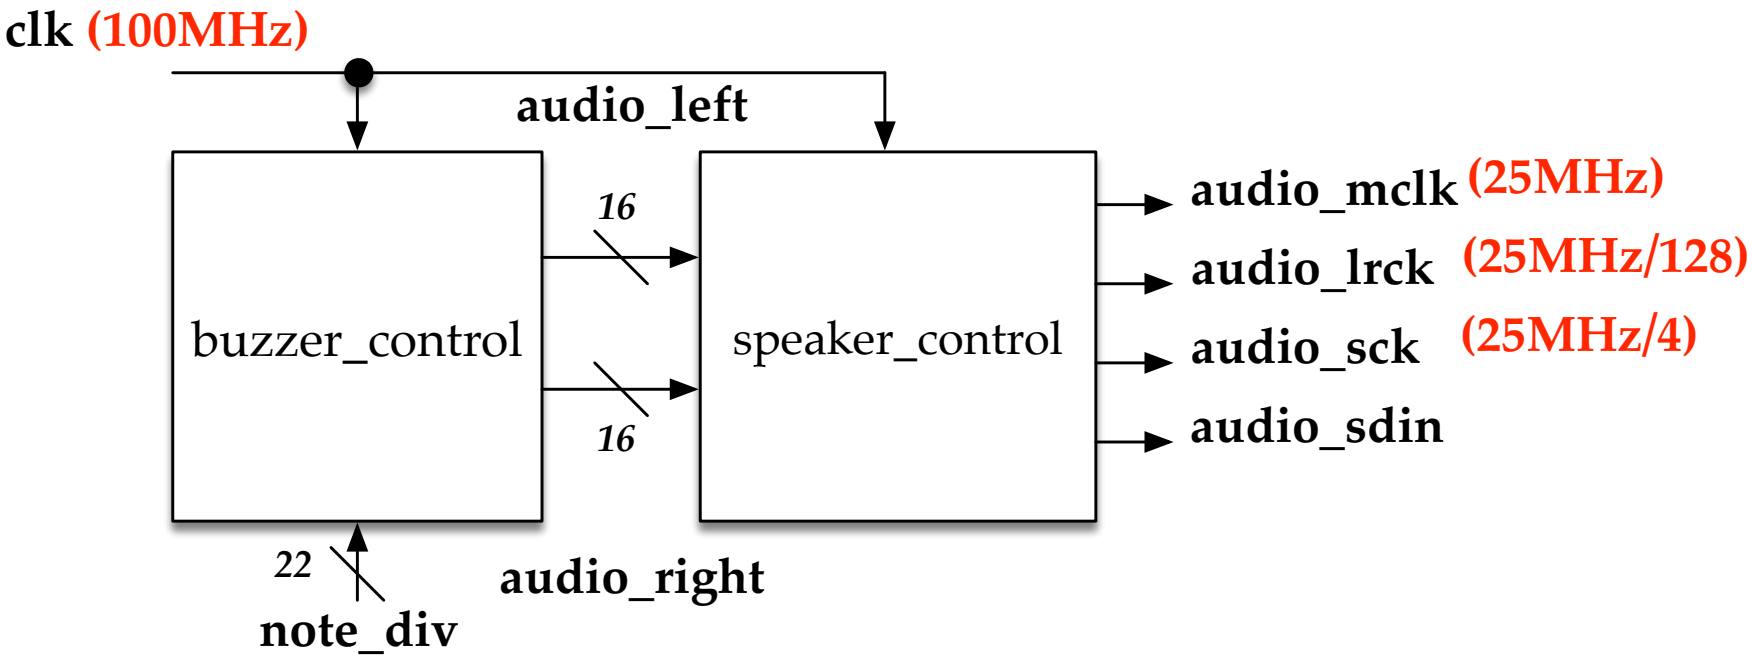
clk (100MHz)
audio_left
buzzer_control
16
16
speaker_control
audio_mclk (25MHz)
audio_lrck (25MHz/128)
audio_sck (25MHz/4)
audio_sdin
22
note_div
audio_right

Speaker Control

- Input (stereo audio ***parallel input***)
  - audio_left [15:0] / audio_right[15:0]
  - 16'h8000(min) ~ 16'h7FFF (max) (2's complement)

Operation Frequency different
25MHz/128 vs. 25MHz/4
Data rate the same: 6.25Mbps

- Output (stereo audio ***serial output***)
  - audio_mclk = 25MHz (divided by 4 from external crystal 100MHz)
  - audio_lrck = 25MHz / 128 (sample rate clock of parallel input audio)
  - audio_sck = 25MHz / 4 (serial clock)
  - audio_sdin (1 bit serial audio data output)

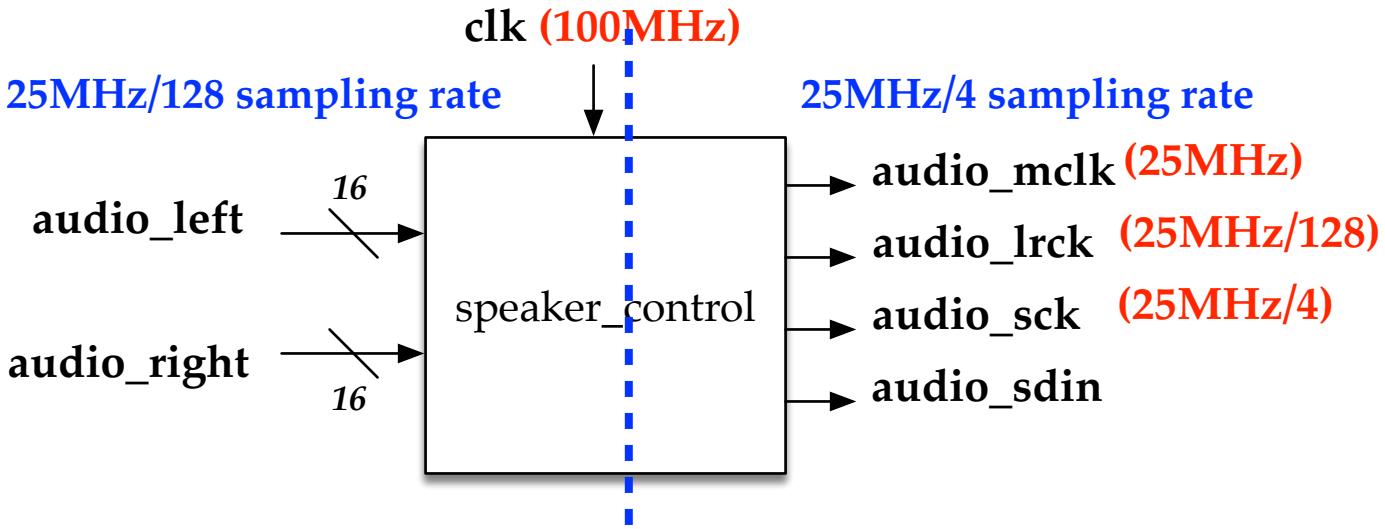

Speaker Control

- Frequency dividers
  - audio_mclk
  - audio_lrck
  - audio_sck
- Parallel to serial module
  - To re-formulate the audio sequence
    - Left first, then right
    - MSB first
    - one SCK cycle delayed

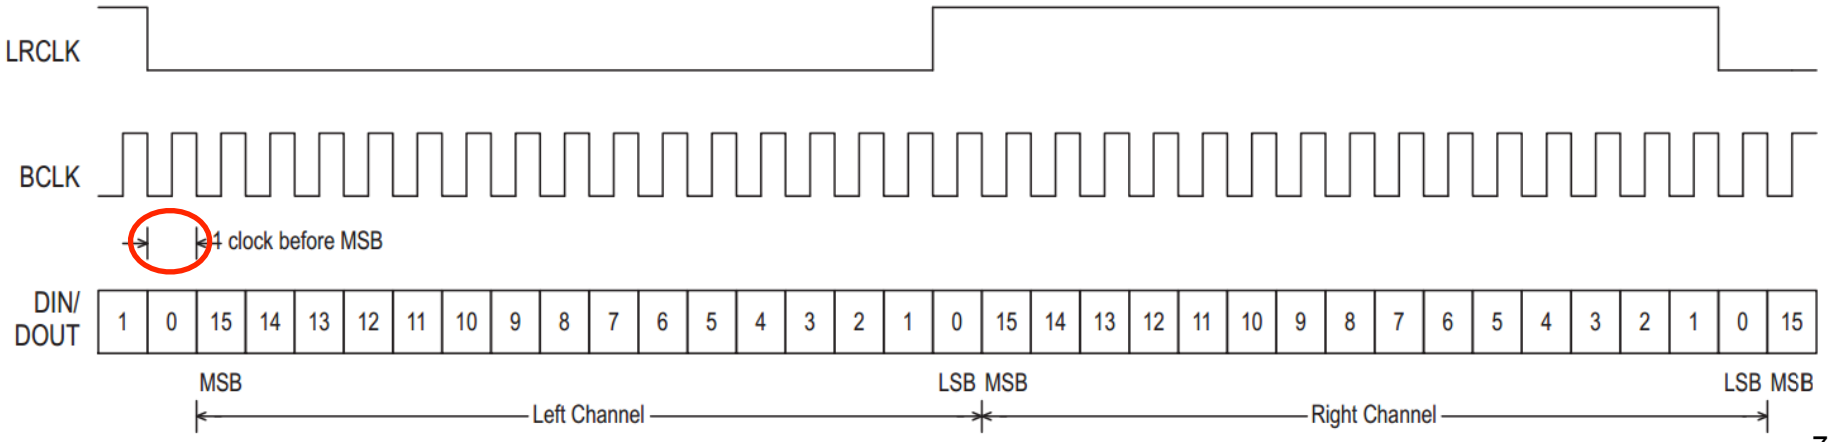

Buzzer Control

- The buzzer frequency is obtained by dividing crystal frequency 100MHz by N.
- The buzzer clock (b_clk) is periodically inverted for every N/2 clock cycles. (***determine the sound***)
- Note frequency
  - Mid Do: 261 Hz
  - Mid Re: 293 Hz
  - Mid Mi: 330 Hz

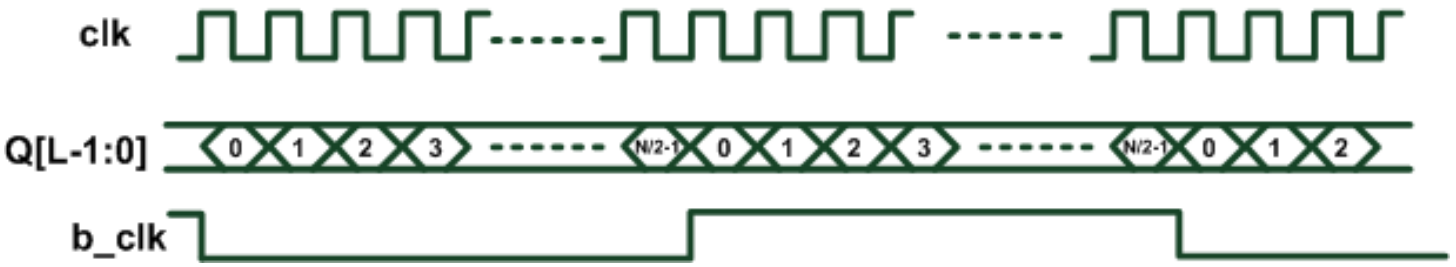

Buzzer Control

```
module note_gen(
  clk, // clock from crystal
  rst_n, // active low reset
  note_div, // div for note generation
  audio_left, // left sound audio
  audio_right // right sound audio
);

// I/O declaration
input clk; // clock from crystal
input rst_n; // active low reset
input [21:0] note_div; // div for note generation
output [15:0] audio_left; // left sound audio
output [15:0] audio_right; // right sound audio

// Declare internal signals
reg [21:0] clk_cnt_next, clk_cnt;
reg b_clk, b_clk_next;
```

```
// Note frequency generation
always @(posedge clk or negedge rst_n)
  if (~rst_n)
  begin
    clk_cnt <= 22'd0;
    b_clk <= 1'b0;
  end
  else
  begin
    clk_cnt <= clk_cnt_next;
    b_clk <= b_clk_next;
  end
always @*
  if (clk_cnt == note_div)
  begin
    clk_cnt_next = 22'd0;
    b_clk_next = ~b_clk;
  end
  else
  begin
    clk_cnt_next = clk_cnt + 1'b1;
    b_clk_next = b_clk;
  end

// Assign the amplitude of the note
assign audio_left = (b_clk == 1'b0) ? 16'hB000 : 16'h5FFF;
assign audio_right = (b_clk == 1'b0) ? 16'hB000 : 16'h5FFF;


endmodule
```

speaker.v

```
module speaker(
  clk, // clock from crystal
  rst_n, // active low reset
  audio_mclk, // master clock
  audio_lrck, // left-right clock
  audio_sck, // serial clock
  audio_sdin // serial audio data input
);

// I/O declaration
input clk;  // clock from the crystal
input rst_n;  // active low reset
output audio_mclk; // master clock
output audio_lrck; // left-right clock
output audio_sck; // serial clock
output audio_sdin; // serial audio data input
// Declare internal nodes
wire [15:0] audio_in_left, audio_in_right;

// Note generation
buzzer_control Ung(
  .clk(clk), // clock from crystal
  .rst_n(rst_n), // active low reset
  .note_div(22'd191571), // div for note generation
  .audio_left(audio_in_left), // left sound audio
  .audio_right(audio_in_right) // right sound audio
);
```

speaker.v

```
// Speaker controllor
speaker_control Usc(
  .clk(clk),  // clock from the crystal
  .rst_n(rst_n),  // active low reset
  .audio_in_left(audio_in_left), // left channel audio data input
  .audio_in_right(audio_in_right), // right channel audio data input
  .audio_mclk(audio_mclk), // master clock
  .audio_lrck(audio_lrck), // left-right clock
  .audio_sck(audio_sck), // serial clock
  .audio_sdin(audio_sdin) // serial audio data input
);

endmodule
```

speaker.xdc

```
# Clock
set_property PACKAGE_PIN W5 [get_ports {clk}]
set_property IOSTANDARD LVCMOS33 [get_ports {clk}]

# active low reset
set_property PACKAGE_PIN V17 [get_ports {rst_n}]
set_property IOSTANDARD LVCMOS33 [get_ports {rst_n}]

# Pmod I2S      Use upper row of JB
set_property PACKAGE_PIN A14 [get_ports {audio_mclk}]
set_property IOSTANDARD LVCMOS33 [get_ports {audio_mclk}]
set_property PACKAGE_PIN A16 [get_ports {audio_lrck}]
set_property IOSTANDARD LVCMOS33 [get_ports {audio_lrck}]
set_property PACKAGE_PIN B15 [get_ports {audio_sck}]
set_property IOSTANDARD LVCMOS33 [get_ports {audio_sck}]
set_property PACKAGE_PIN B16 [get_ports {audio_sdin}]
set_property IOSTANDARD LVCMOS33 [get_ports {audio_sdin}]
```