Chipsee

Industrial PC

# PPC-A76-070




PN: CS10600-RK3588-070P

Content can change at anytime, check our website for latest information of this product.
www.chipsee.com

# Contents


**1 Product Overview** 3

**2 Product Changes** 4

**3 Ordering Options** 4

3.1 Operating System 4

3.2 Optional Features 5

**4 Hardware Features** 5

**5 Power Input** 6

5.1 Default Connector 7

5.2 DC Jack 7

5.3 Ignition Signal 8

**6 Touch Screen** 9

**7 Connectivity** 9

7.1 RS232/RS485 9

7.2 GPIO 11

7.3 USB Connectors 12

7.4 LAN Connectors 14

7.5 WiFi & BT Module 14

7.6 4G/LTE Module 15

**8 TF Card Slot** 17

**9 Audio Connectors** 18

**10 HDMI Connector** 20

**11 PROG Button** 20

**12 Mounting Procedure** 21

**13 Mechanical Specifications** 21

**14 3D Model** 22

**15 Disclaimer** 22

**16 Technical Support** 22

# PPC-A76-070




Front View




Rear View




Side View 1




Side View 2

## 1 Product Overview

The Cortex®-A76 series PPC-A76-070 (PN: CS10600-RK3588-070P) is a high-quality IP65-compliant industrial panel PC. This single board computer features a 7.0” 5-point capacitive touch screen with 1.0mm tempered glass, a resolution of 1024 x 600 pixels and a brightness of 400 cd/$m^2$.

Key Applications

- Human Machine Interface  HMI
- Mobile Applications
- Video Processing
- Machine Learning
- Video Gaming
- Process Control
- Process Monitoring
- ATM...

It is available as a device hosed in an aluminum casing with bezels, thus facilitating different installation options:

- Installation on an industrial cabinet
- Integration with the existing equipment

The PPC-A76-070 Industrial Panel PC is based around the powerful RK3588J System on Chip (SoC), powered by the Rockchip RK3588J low-power processor which integrates a Quad(4)-core Cortex®-A76 (2.0GHz) and Quad(4)-core Cortex®-A55 (1.8GHz) processor.

The RK3588J supports multi-format video decoders and has a high-performance 8GB LPDDR4 RAM capable of sustaining demanding memory bandwidths. It also provides a complete set of peripheral interfaces.

# 2 Product Changes

Ver 1.3

- Released on Oct 29, 2026
- Changes on CAN

> **Note**
>
> **Old**: CAN FD supported
>
> **New**: CAN is no longer supported; the former CAN pins are not connected (NC)

- The manual of the previous version, with CAN: `Download Archived Manual: PPC-A76-070-ver1.2.pdf`

# 3 Ordering Options

Chipsee products can be customized during the ordering process. The product will be shipped with the pre-installed factory defaults if no extra requirements are specified. The table in the Hardware Features section provides information about the default options bundled with the product.

> **Note**
>
> You can order the PPC-A76-070 from the official Chipsee Store or from your nearest distributor.

## 3.1 Operating System

This product comes with a pre-installed OS of your choice. Please see the list below for the supported OSes, which can also be obtained from the Software Documentation section, along with the detailed installation instructions.

- Debian 11
- Buildroot Linux Qt 5.15

> **Warning**
>
> The Software Documentation section provides a detailed instruction on how to install different OSes on your own. However, bear in mind that Chipsee can't take the responsibility of inadequate installation procedure. If you "brick" your device, please contact Chipsee Technical Support at **support@chipsee.com** for further assistance

## 3.2 Optional Features

The PPC-A76-070 Industrial Panel PC does not include 4G/LTE module by default. The module is optional and can be selected at the Chipsee store during the ordering process.

This product doesn't have M.2 PCIe socket.

> **Warning**
>
> Installation, repair, and maintenance tasks should be performed by trained personnel only. Chipsee does not bear any responsibility for damage caused by inadequate handling of the product.

# 4 Hardware Features

The PPC-A76-070 Industrial Panel PC offers a broad range of performance and connectivity options for scalable integration, providing expandability according to future needs. Some of the key features are listed in the table below.

**Key Features**

| | PPC-A76-070 |
|---|---|
| **CPU** | Rockchip RK3588J, Quad(4)-core Cortex-A76 (2.0GHz) and Quad(4)-core Cortex-A55 (1.8GHz) |
| **GPU** | ARM Mali-G610 MC4. Up to 8K60 FPS video decoding, up to 8K30 FPS video encoding. |
| **NPU** | Neural network acceleration engine with 6Tops int8, support Int4/8/16/FP16/BF16/TF32. |
| **RAM** | 8GB LPDDR4 |
| **eMMC** | 64GB |
| **PCIe** | N/A |
| **Storage** | TF Card, Supports up to 128GB SDHC |
| **Display Size** | 7.0" |
| **Display Type** | LCD |
| **Display Resolution** | 1024 x 600 |
| **Brightness** | 400 cd/$m^2$ |
| **HDMI** | 1 x HDMI-D (Micro-HDMI) Out |
| **Touch Technology** | Capacitive |
| **Touch Point** | 5 |
| **Glass** | 1.0mm Tempered Glass |
| **USB** | 2 x USB 3.0 HOST, 1 x USB Type-C[1] |
| **LAN** | 2 x RJ45, GbE |
| **POE** | N/A |
| **Audio** | 3.5mm Audio In/Out Connector, 2W Internal Speaker |
| **Buzzer** | Yes |

| PPC-A76-070 | |
|---|---|
| **RTC** | High accuracy RTC with farad capacitor, can work 1 week after power off **(default)**. High accuracy RTC with lithium coin battery, can work 3 years after power off **(optional)**. |
| **RS232** | default 2 x RS232 **(Optional 6 x RS232 at most, include 1 debug port)**[2] |
| **RS485** | default 3 x RS485 at most[2] |
| **CAN** | N/A |
| **GPIO** | 8 Channels Isolated IO, 4 x Input and 4 x Output |
| **WiFi/BT** | Integrated WiFi/BT Module |
| **4G/LTE** | Supported, Optional |
| **Power Input** | From 9V to 30V (supports optional 24V ignition signal) |
| **Current** | 533mA (max) at 15V |
| **Power Consumption** | 8W (max) |
| **Working Temperature** | From -10°C to +60°C |
| **OS** | Debian11, Buildroot Linux Qt 5.15 |
| **Dimensions** | PPC-A76-070 (PN: CS10600-RK3588-070P): 188.05 x 123.11 x 33.20mm |
| **Weight** | PPC-A76-070 (PN: CS10600-RK3588-070P): 700g |
| **Mounting** | PPC-A76-070 (PN: CS10600-RK3588-070P): Panel, VESA |


[1] The USB-A host (near RJ45) and USB-C **can't be used** at the same time. Before boot into OS, USB-C is enabled for install OS image; after boot into OS, USB-A is enabled but USB-C is disabled. In Android, these can be configured; in Linux, these can't be configured.

[2] (1,2)
This product has 6 x UART channels in total. The default configuration is 2 x RS232 and 3 x RS485, including 1 debug port. Pin 13 and Pin 14, not connected by default, can be configured to RS232. UART can be swapped between RS232 and RS485 modes easily, if you need a different RS232/RS485 configuration, please get in touch with the Chipsee Technical Support at **support@chipsee.com**

# 5 Power Input

The PPC-A76-070 Industrial Panel PC can be powered by a wide range of input voltages: From 9V to 30V (supports optional 24V ignition signal) DC.

There are two DC input interfaces on this device: a **3-pin, 3.81mm terminal**, and a **2.1mm I.D x 5.5mm O.D x 9.5mm DC connector**.

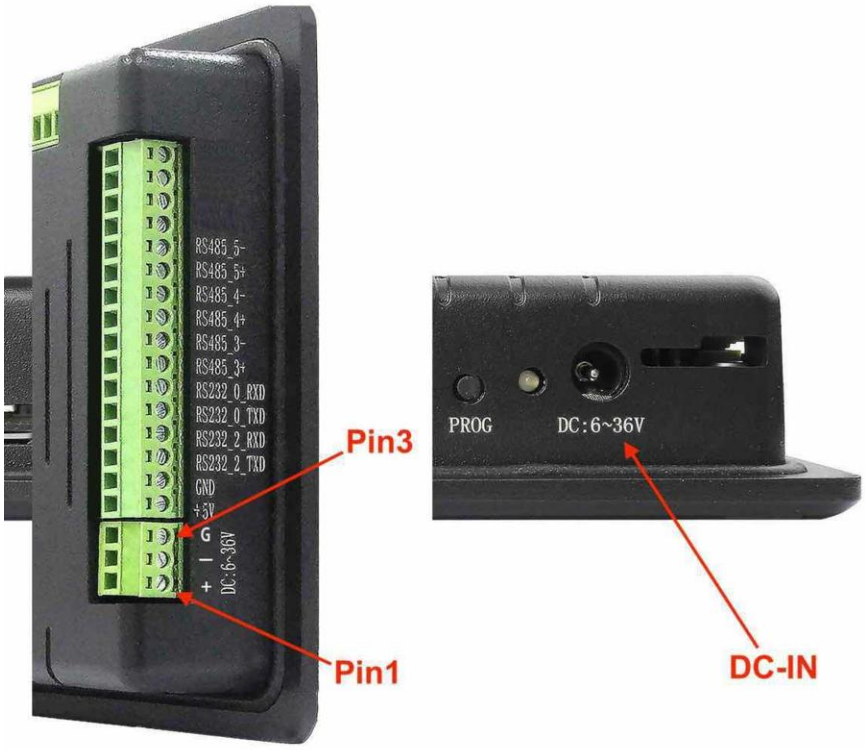


Power Input

Note that the "**+**" sign represents the positive power input. The "**-**" terminal is shorted to the ground.

## 5.1 Default Connector

By default, the 3 pins are +, - and ground.

**Power Connector**

| **Power Input Definition** | | |
|---|---|---|
| **Pin Number** | **Definition** | **Description** |
| Pin 1 | Positive Input | DC Power **Positive Terminal** |
| Pin 2 | Negative Input | DC Power **Negative Terminal** |
| Pin 3 | Ground | **Power System Ground** |

> **Note**
>
> The system ground "**G**" is connected to power negative "**-**" on board.

## 5.2 DC Jack

For a proper 2.1mm x 5.5mm x 9.5mm DC power connector, refer to the figure below:.





DC Jack

## 5.3 Ignition Signal

The product has a “ignition signal” **optional** feature. By default the ignition signal is not installed. If you need this feature you can contact us when placing an order. In this setup, Pin 3 is the ignition signal pin.

To use this feature, apply a 24V DC input (relative to -) to Pin 3. If Pin 3 detects a low input voltage, the product will be shutdown. If Pin 3 detects a high input voltage, the product will be boot and running.

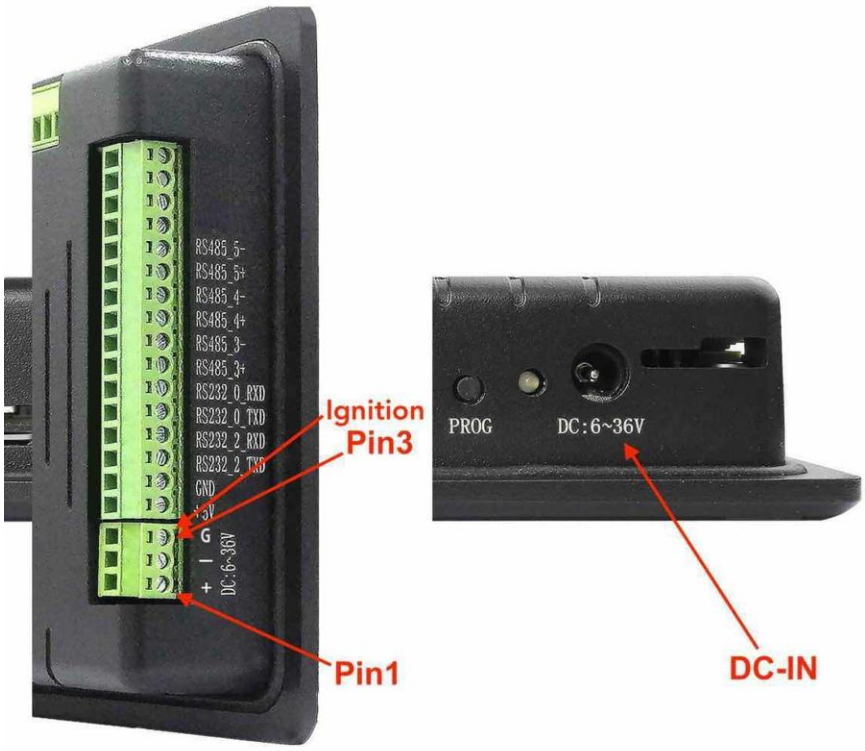


Power Input (with Ignition Signal)

**Power Connector with Ignition Signal**

| Power Input Definition | | |
|---|---|---|
| **Pin Number** | **Definition** | **Description** |
| Pin 1 | Positive Input | DC Power **Positive Terminal** |
| Pin 2 | Negative Input | DC Power **Negative Terminal** |
| Pin 3 | Ignition | **Ignition Signal** |

# 6 Touch Screen

The PPC-A76-070 Industrial Panel PC uses a 5-point capacitive touch screen with 1.0mm tempered glass.



*Capacitive Touch Screen Connector*

> **Attention**
>
> A capacitive touch screen is susceptible to power noise and Electromagnetic Radiation (EMR). It may cause LCD ripples or even capacitive touch malfunction. If using a capacitive multi-touch test application, you might notice the touch points float erratically across the display. There are several solutions to this problem:
>
> 1. Use a high-quality Power Adapter Unit (PSU) with low EMR. You can also provide power from a battery.
> 2. Make sure that the PPC-A76-070 Power Input connector (pin 3) is properly connected to the Power System Ground to provide sufficient EMI shielding and eliminate the problem entirely.
> 3. Bad GND problems can also be confirmed by touching pin 3 of the Power Input connector with one hand while operating the capacitive touch screen with the other hand. In this case, the operator's body acts as the Power System Ground.

# 7 Connectivity

There are many connectivity options available on the PPC-A76-070 industrial PC. It has 2 x USB 3.0 HOST, 1 x USB Type-C, 2 x RJ45, GbE (RJ45) Ethernet connector supporting up to 1 Gbps, and 5 x UART terminals (RS232/RS485).


## 7.1 RS232/RS485

The serial communication interfaces (RS485 and RS232) are routed to a **16-pin 3.81mm terminal**, as illustrated on the figure below.

Serial communication on both RS485 and RS232 interfaces can reach up to 115200 kbps.

**Attention**

1. Pin 13 to Pin 16 are not connected (NC). Pin 13 and Pin 14 can be configured to RS232 **(optional)**.
2. The 120Ω match resistor for the RS485 is mounted by default.
3. RS485_3, RS485_4 and RS485_5 can control the input and output direction automatically. There's no need to control it from within the software.

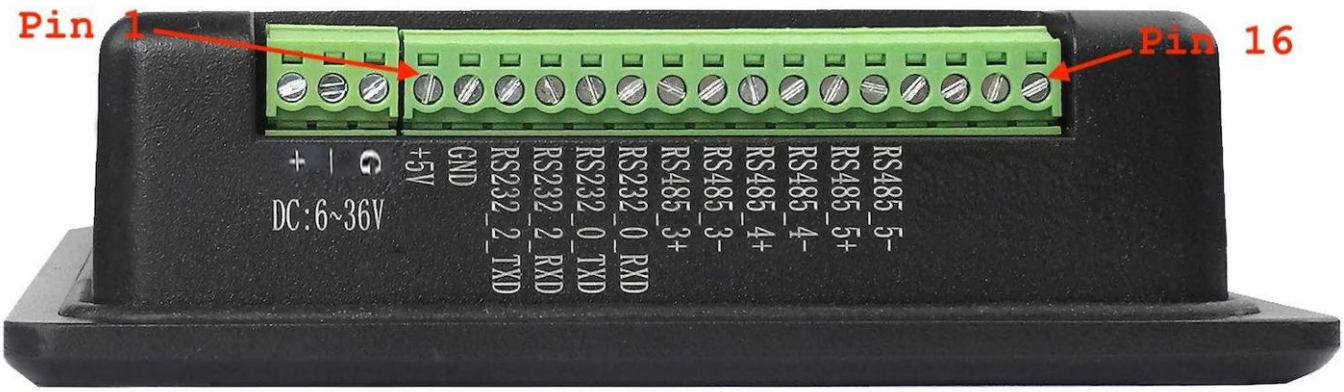


RS232 RS485 Pins

The table below offers more detailed description of every pin and its definition:

**RS232 / RS485 Pin Definition**

| Pin Number | Definition | Description | OS Node |
|---|---|---|---|
| Pin 16 | NC | Not connected | |
| Pin 15 | NC | Not connected | |
| Pin 14 | NC | Not connected | |
| Pin 13 | NC | Not connected | |
| Pin 12 | RS485_5- | CPU UART1, RS485 –(B) signal | |
| Pin 11 | RS485_5+ | CPU UART1, RS485 +(A) signal | /dev/ttyS1 |
| Pin 10 | RS485_4- | CPU UART0, RS485 –(B) signal | |
| Pin 9 | RS485_4+ | CPU UART0, RS485 +(A) signal | /dev/ttyS0 |
| Pin 8 | RS485_3- | CPU UART4, RS485 –(B) signal | |
| Pin 7 | RS485_3+ | CPU UART4, RS485 +(A) signal | /dev/ttyS4 |
| Pin 6 | RS232_0_RXD | CPU UART6, RS232 RXD signal | |
| Pin 5 | RS232_0_TXD | CPU UART6, RS232 TXD signal | /dev/ttyS6 |
| Pin 4 | RS232_2_RXD | CPU UART2, RS232 RXD signal, Debug Port | |
| Pin 3 | RS232_2_TXD | CPU UART2, RS232 TXD signal, Debug Port | /dev/ttyFIQ |
| Pin 2 | GND | System Ground | |
| Pin 1 | +5V | System +5V Power Output, No more than 1A Current output | |

## 7.2 GPIO


The PPC-A76-070 Industrial Panel PC features a **10-pin 3.81 mm terminal** that provides 8 x opto-isolated GPIO pins, of which 4 x are output, and 4 x are input pins.

The GPIO **HIGH** output level corresponds to the voltage connected at the isolated Power Input, while the GPIO **LOW** output level corresponds to the isolated Ground Input.


The GPIO uses the 24V logic by default. You can use an external isolated power input but the power input range should be from 5V to 24V DC.

**Attention**

1. In order to use the Isolated Output, you need to add an external Isolated Power to the VDD_ISO and GND_ISO. The power voltage should not exceed 24V.
2. The output current can supply 500mA for every channel, but it also depends on the isolated power that is connected.
3. In order to use the Isolated Input, you need to add a signal to the InputX and GND_ISO. A 2.4KΩ resistor has been added to limit the input current, as shown in the figure below. This resistor should work well for the 5-24V input signal. If your input signal is less than 5V, please change this input resistor. The reduced schematic is for reference purpose, if you need the precise resistor schematic, please contact us.
4. If the isolation is not a requirement, it is possible to use a non-isolated PSU instead. It is also possible to use the onboard 5V power supply: it can be re-routed to the *Isolated Power Input* pin by populating two PCB resistor footprints with 0Ω resistors. In this case, the *Isolated Power Input* pin will become an output for the onboard 5V power supply.

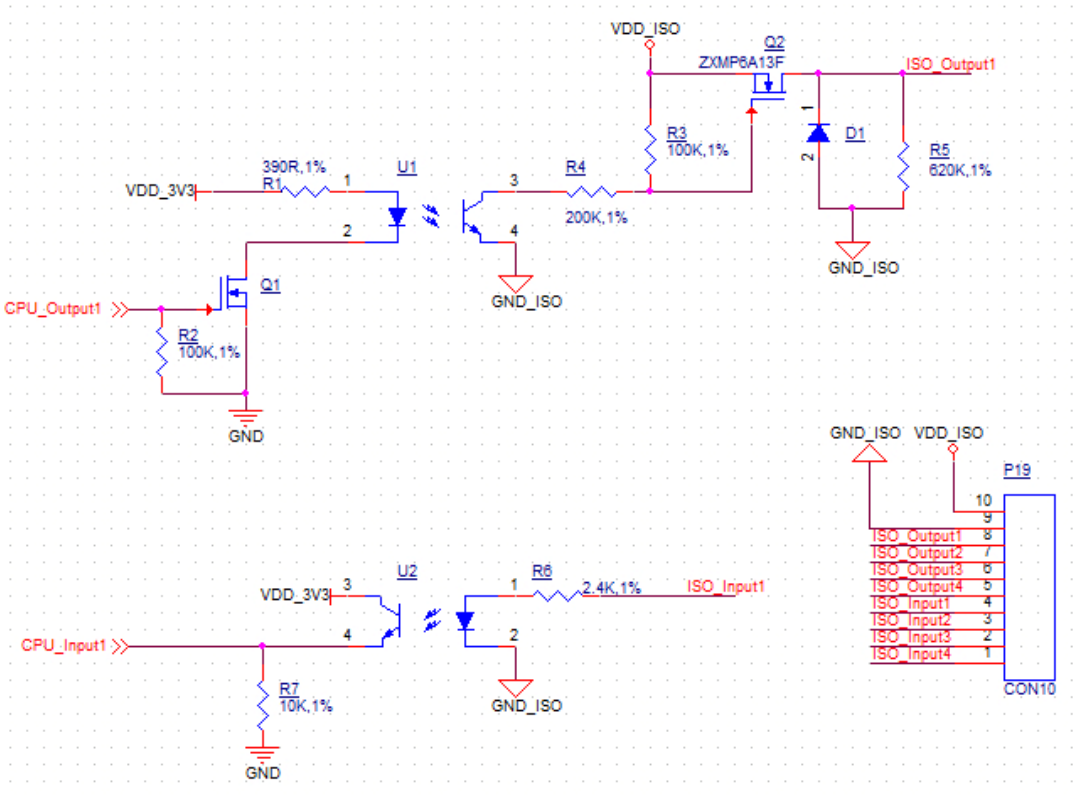


Isolated GPIO reduced schematic

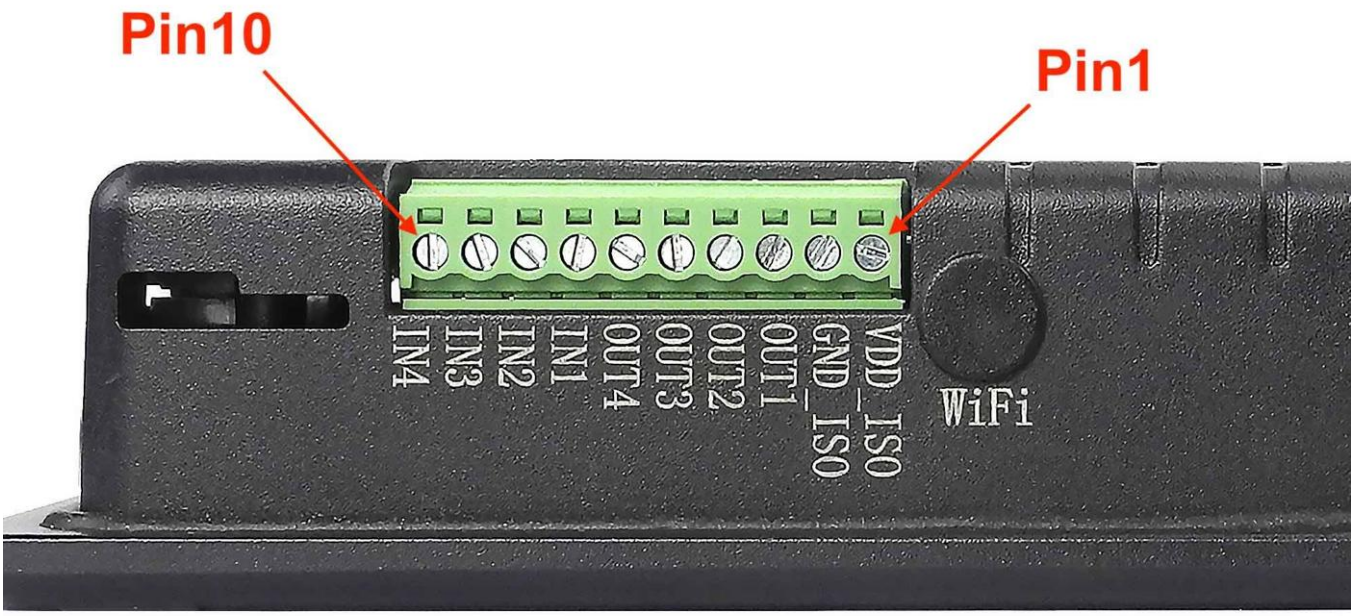


GPIO Terminal

**GPIO Pinout**


| Pin Number | Definition | GPIOD Chip | GPIOD Line |
|---|---|---|---|
| Pin 1 | Isolated Power Input | | |
| Pin 2 | Isolated Ground Input | | |
| Pin 3 | OUT1 | 4 | 14 |
| Pin 4 | OUT2 | 4 | 13 |
| Pin 5 | OUT3 | 4 | 8 |
| Pin 6 | OUT4 | 4 | 7 |
| Pin 7 | IN1 | 4 | 6 |
| Pin 8 | IN2 | 1 | 9 |
| Pin 9 | IN3 | 1 | 8 |
| Pin 10 | IN4 | 1 | 6 |

## 7.3 USB Connectors

There are 2 x **USB HOST** and 1 x **USB DEVICE** (for flashing OS) ports onboard: 2 x USB 3.0 HOST, 1 x USB Type-C, as shown in the figures below.

> ⚠ **Warning**
>
> **Please unplug USB mouse/keyboard** near RJ45 when flashing OS.

The USB-A host (near RJ45) and USB-C **can't be used** at the same time. Before boot into OS, USB-C is enabled for install OS image; after boot into OS, USB-A is enabled but USB-C is disabled. In Android, these can be configured; in Linux, these can't be configured.

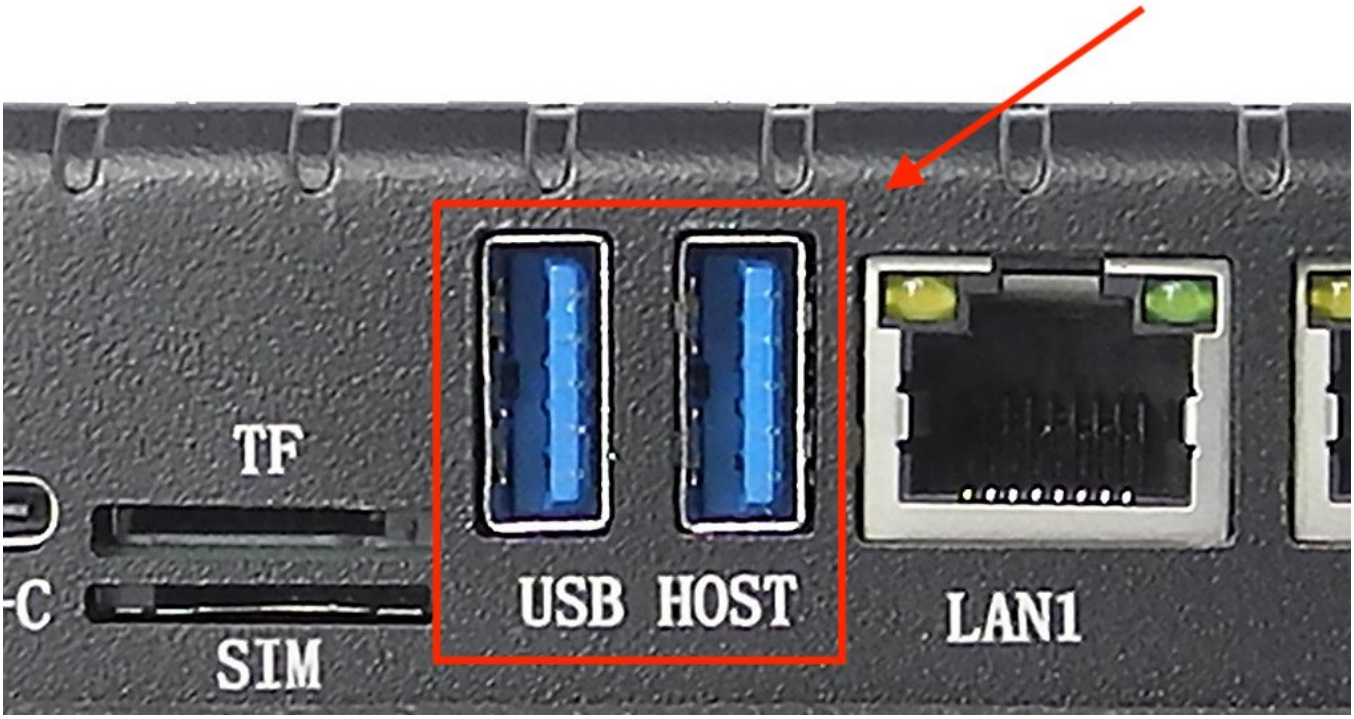


USB 3.0 HOST Port





USB Type-C Port

**Warning**

Be careful not to touch surrounding electronic components accidentally while plugging USB devices into the embedded IPC version.

## 7.4 LAN Connectors

**LAN (RJ45) connector** provides 2 x RJ45 Ethernet connectivity over standardized Ethernet cables as shown in the figure below. The integrated Ethernet interface supports up to 1 Gbps data throughput.

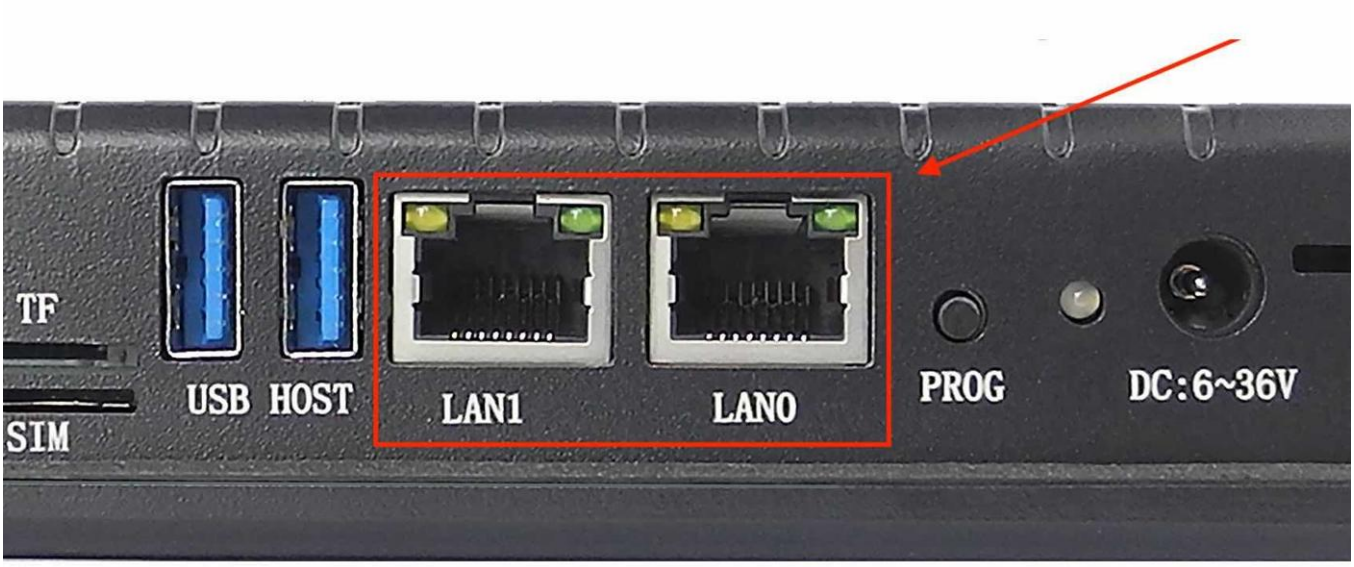



RJ45 LAN Connector

> **Note**
>
> Use CAT5 or better cables to achieve full data throughput over maximum distance defined by the 1000BASE-T standard (100m).

## 7.5 WiFi & BT Module

The PPC-A76-070 Industrial Panel PC is equipped with the WiFi-6 **Realtek RTL8852BE WiFi/BT** chip (through CPU PCIe lane) which supports Bluetooth V2.1+EDR/4.2/5.2, as well as IEEE802.11a/b/g/n/ac/ax 2.4/5 GHz Wireless LAN (WLAN).

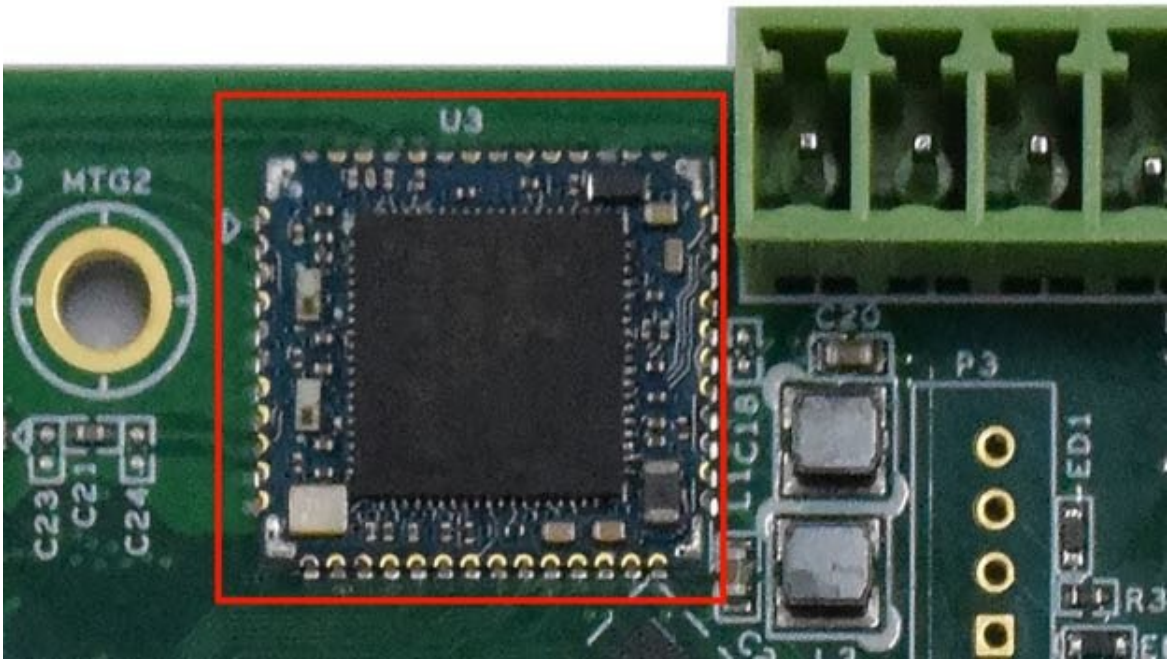


Realtek RTL8852BE Chip


The PPC-A76-070 includes an SMA connector for an external WiFi/BT antenna, as illustrated in the figure below.




WiFi+BT Antenna SMA

## 7.6 4G/LTE Module

The PPC-A76-070 Industrial Panel PC is equipped with a **mini-PCIe connector** (through USB CPU lane) that can connect an **optional** 4G/LTE module. The customer will also need a SIM Card Holder and a 4G/LTE antenna connector to ensure 4G/LTE works on the PPC-A76-070. SIM card does **NOT** support hot plug. **Power off** before inserting or removing SIM card.

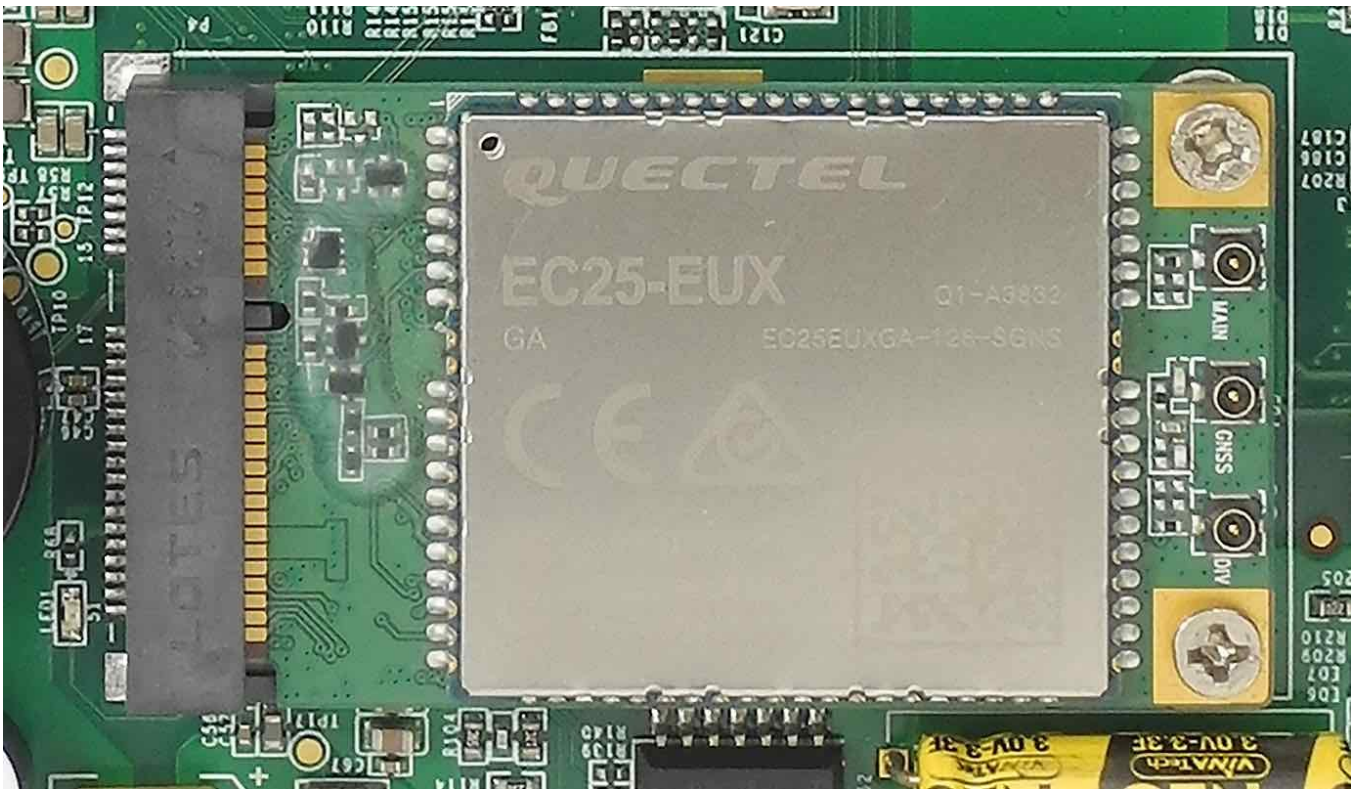


Mini PCI-e and 4G/LTE Module



4G/LTE Antenna




SIM Card Direction

> **Attention**
>
> The product does not come shipped with the 4G/LTE module by default. The customer can choose the 4G/LTE module option when placing an order, we will install all the necessary components.

## 8 TF Card Slot

The PPC-A76-070 Industrial Panel PC features 1 x **TF Card (micro SD) slot**. TF Card can address up to 128GB of storage.




TF (micro SD) Card Slot

> **Note**
>
> The product does not come shipped with the TF Card by default.


## 9 Audio Connectors

The PPC-A76-070 Industrial Panel PC features some audio peripherals. It has a **3.5mm audio input/output jack**, an **internal speaker**, as well as a small **buzzer**.




Audio Connector

The miniature 2W embedded speaker is handy for audio reproduction, the small buzzer can play alarm/ notification sounds.

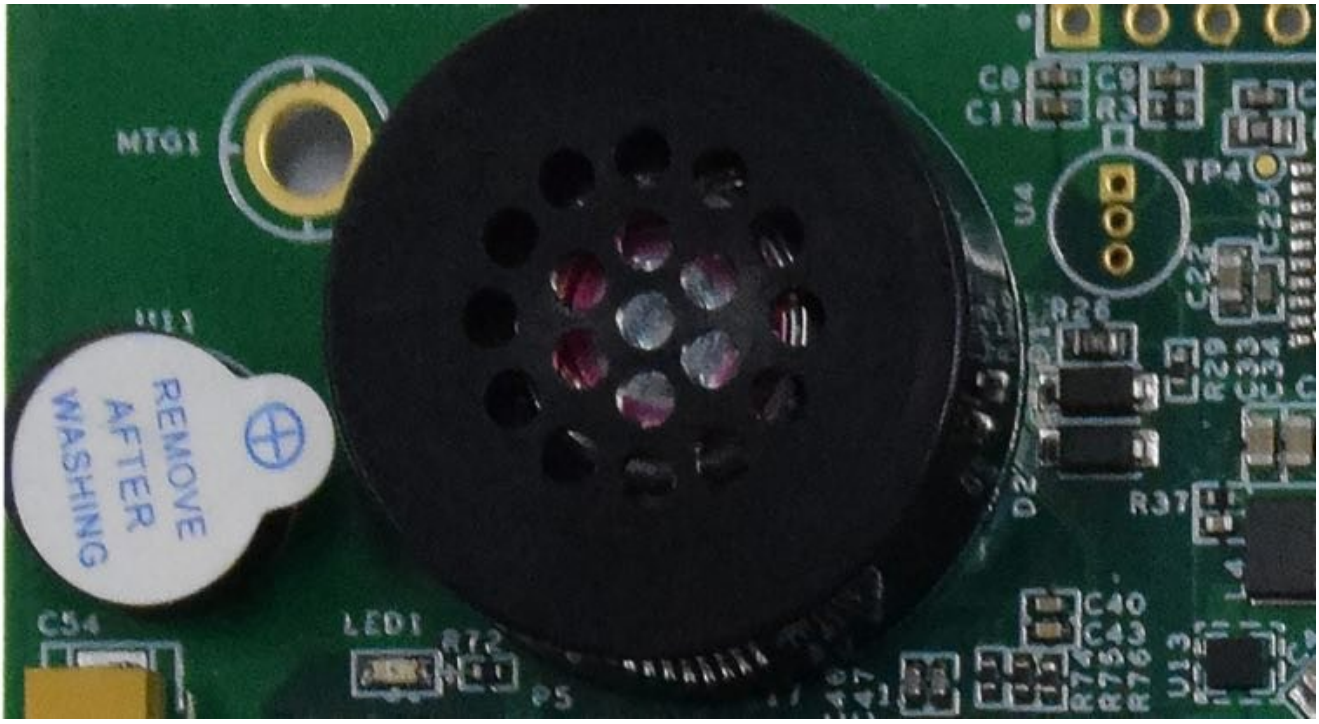


2W Micro Speaker and Buzzer

**Attention**

By plugging in the headphone cable, the internal speaker will be disabled automatically.

# 10 HDMI Connector

The PPC-A76-070 Industrial Panel PC is equipped with 1 x HDMI-D (Micro-HDMI) Out port. The HDMI connector allows connecting an additional (external) monitor. HDMI output resolution can be configured by the software.




HDMI Connector

# 11 PROG Button

The PPC-A76-070 Industrial Panel PC has one button on the board marked as PROG, as shown in the figure below.

When the button is pressed before powering up, the PPC-A76-070 will enter MASKROM mode. In this mode you can use a USB Type-C cable to upgrade its operating system. You can use this feature to flash another OS to the internal eMMC.

When the button is not pressed before and during power up, the PPC-A76-070 will boot normally.

There is no need to press the button during regular operation. However, if you need to flash the OS in MASKROM mode, the button will be used. Please refer to the software documents for more information.




PROG Button

## 12 Mounting Procedure

You can mount PPC-A76-070 with VESA mounting (guide): **75 x 75** mm, 4 x **M4** (6mm) screws.


You can also mount PPC-A76-070 with panel mounting method (guide).

> **Attention**
>
> Please make sure the display is not exposed to high pressure when mounting into an enclosure.

## 13 Mechanical Specifications

For PPC-A76-070, the outer mechanical dimensions are 188.05 x 123.11 x 33.20mm (W x L x H).

Please refer to the technical drawing in the figure below for details related to the specific product measurements.

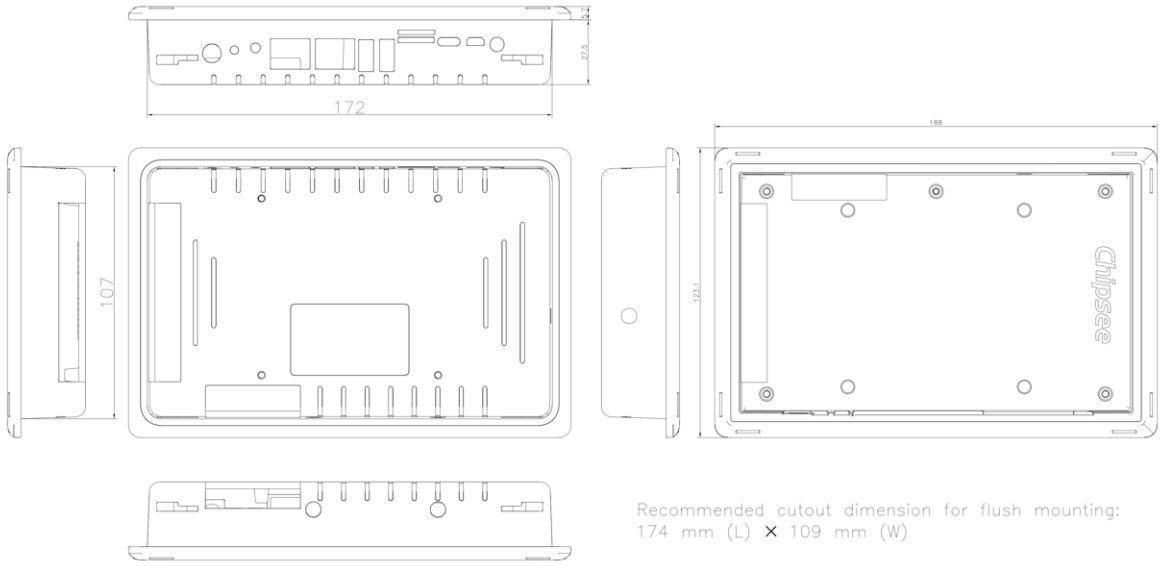


PPC-A76-070 *Technical Drawing*

## 14 3D Model

PPC-A76-070 3D model can be viewed in the online doc in a web browser, **if you are reading from the PDF** version, please visit the online doc PPC-A76-070, select hardware documentation, drag the navigation bar to the 3D Model section.

## 15 Disclaimer

**This document is provided strictly for informational purposes. Its contents are subject to change without notice. Chipsee assumes no responsibility for any errors that may occur in this document. Furthermore, Chipsee reserves the right to alter the hardware, software, and/or specifications set forth herein at any time without prior notice and undertakes no obligation to update the information contained in this document.**

**While every effort has been made to ensure the accuracy of the information contained herein, this document is not guaranteed to be error-free. Further, it does not offer any warranties or conditions, whether expressed orally or implied in law, including implied warranties and conditions of merchantability or fitness for a particular purpose. We specifically disclaim any liability with respect to this document, and no contractual obligations are formed either directly or indirectly by this document.**

**Despite our best efforts to maintain the accuracy of the information in this document, we assume no responsibility for errors or omissions, nor for damages resulting from the use of the information herein. Please note that Chipsee products are not authorized for use as critical components in life support devices or systems.**

## 16 Technical Support

If you encounter any difficulties or have questions related to this document, we encourage you to refer to our other documentation for potential solutions. If you cannot find the solution you're looking for, feel free to contact us. Please email Chipsee Technical Support at **support@chipsee.com**, providing all relevant information. We value your queries and suggestions and are committed to providing you with the assistance you require.