




3.7v -> 6v Voltage Booster

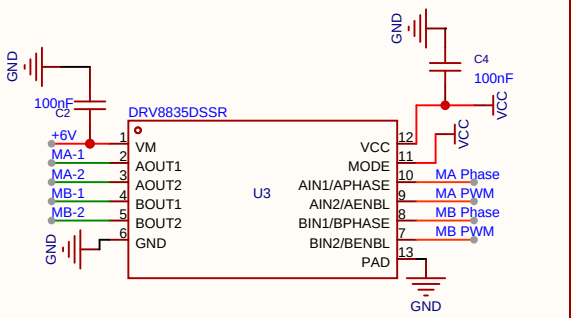


Motor Driver




N20 Motors

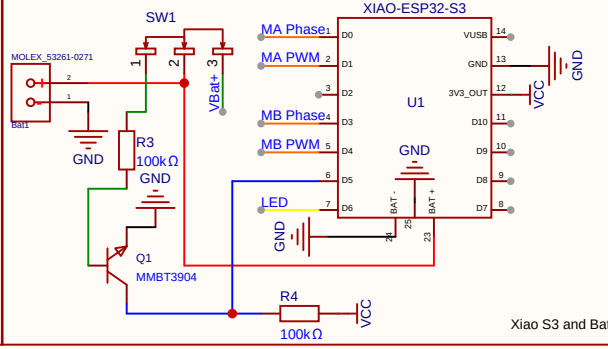



Xiao S3 and Battery

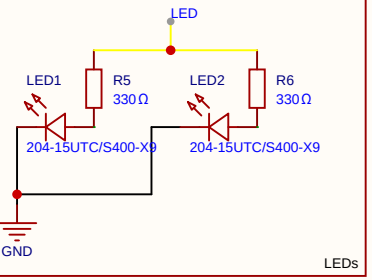

LEDs

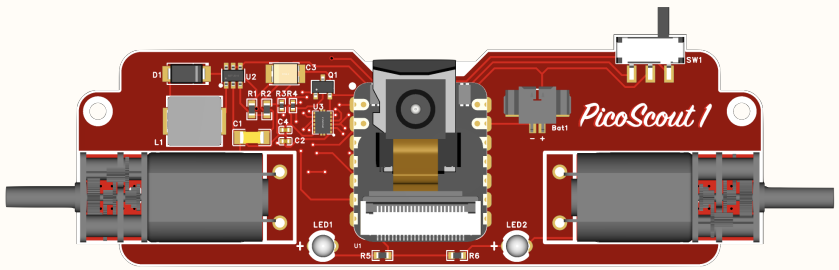

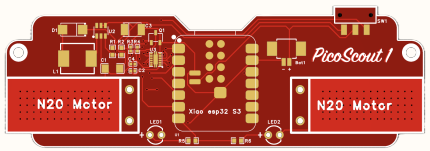

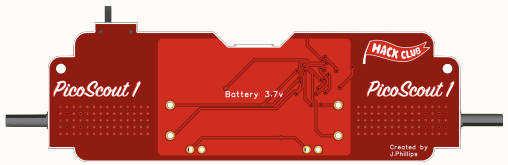

No.	Quantity	Designator	Name (Generalized)	Manufacturer	Manufacturer Part Number (MPN)	Specific Notes
1	1	Bat1	Battery connector	Molex	53261-0271	
2	1	C1	22uF Capacitor	SAMSUNG	CL31A226KAHNNNE	
3	2	C2,C4	100nF Capacitor	YAGEO	CC0402KRX7R7BB104	
4	1	C3	100uF Capacitor	KEMET	T491B107K010AT	
5	1	D1	Diode	Hangyu	SS34	
6	1	L1	Inductor	FAUKU	GSM0630-220-M	
7	2	LED1,LED2	LED light	EVERLIGHT	204-15UTC/S400-X9	
8	2	M-A,M-B	N20 6v motor 1000rpm	-	-	Buy seperately (Without encoder)
9	1	Q1	Transistor	ALJ	MMBT3904	
10	1	R1	90.9kΩ Resistor	Tyohm	RMC060390.9K1%N	
11	1	R2	10kΩ Resistor	UNI-ROYAL	0603WAF1002T5E	
12	2	R3,R4	100kΩ Resistor	RALEC	RTT021003FTH	
13	2	R5,R6	330Ω Resistor	YAGEO	RC0603FR-07330RL	
14	1	SW1	Switch	SHOU HAN	MST-12D18G4	
15	1	U1	Xiao Esp32-S3 Sense	Seeed Studio	113991115	
16	1	U2	Voltage booster	西安航天民芯	MT3608	
17	1	U3	Motor Driver	TI(德州仪器)	DRV8835DSSR	
18	1	-	3.7v Battery	-	-	Buy Separately (950mAh)

Notes

Schematic	Schematic1	Create at	2026-10-07
		Update at	2026-10-09
Board	Board1	Page	PicoScout1 Schematic
Drawn	J.B.P		
Reviewed			
		PicoScout1	
		Version	1

EasyEDA