




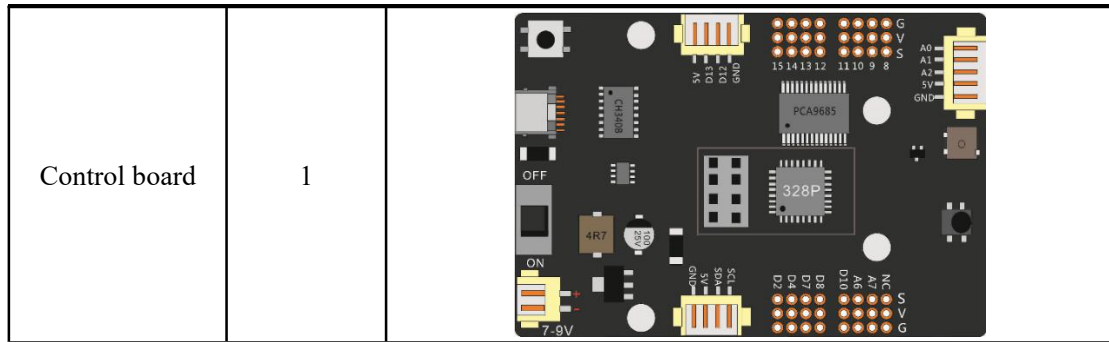
Lesson 5 Test the green led module

Table

1.What do you need to prepare.....	1
2.Knowledge and principle.....	2
3.Wiring.....	3
4.Upload the code and test.....	4
5.Any questions and suggestions are welcome.....	8

1.What do you need to prepare

Components	Quantity	Picture
USB cable	1	
Green LED module	2	
3 pin wire	2	



2.Knowledge and principle


An LED is a type of diode. All diodes only work if current is flowing in the correct direction and have two Poles. An LED will only work (light up) if the longer pin (+) of LED is connected to the positive output from a power source and the shorter pin is connected to the negative (-). Negative output is also referred to as Ground (GND). This type of component is known as “Polar” (think One-Way Street).

All common 2 lead diodes are the same in this respect. Diodes work only if the voltage of its positive electrode is higher than its negative electrode and there is a narrow range of operating voltage for most all common diodes of 1.9 and 3.4V. If you use much more than 3.3V the LED will be damaged and burn out.

LED	Voltage	Maximum Current	Recommended current
Red	1.9~2.2V	20mA	10mA
Green	2.9~3.4V	10mA	5mA
Blue	2.9~3.4V	10mA	5mA

Volt ampere characteristics conform to diode


The green LED module schematic diagram as below:

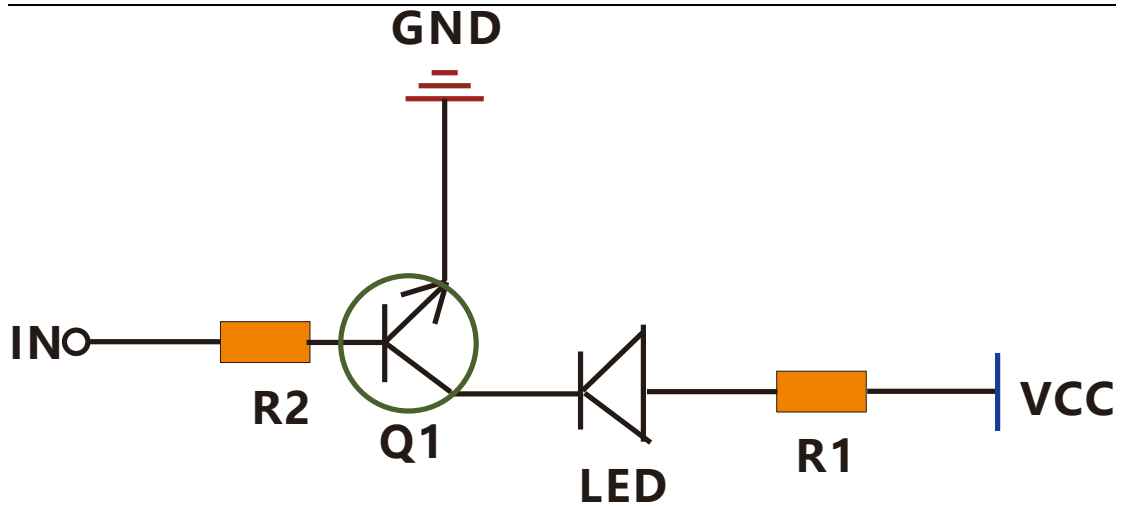


Q1 is a NPN type triode. When a high level signal input to the IN pin, Q1 is switched on and the LED is lit. When the NPN type triode is used in the switching state, most of the emitter is grounded, the collector is connected to a high level, and the base is connected to the control signal. The key point is the voltage between the b pole (base) and the e stage (emitter), for NPN triode, as long as the b pole voltage is higher than 0.7V above the e stage, the triode can be smoothly switched on between the e stage and the c stage.

3.Wiring

Using the 3 pin wires to connect the two green led modules with the X6 and X8 connectors on the control board. As the power is relatively small when the LED is working, only the USB cable power supply can be connected, and the external 18650 battery power supply is not required. Wiring connections are as follows:

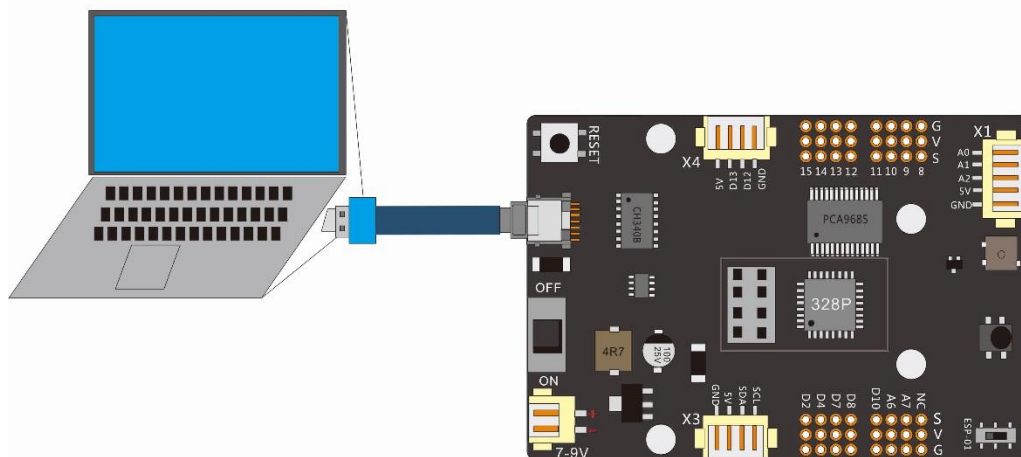

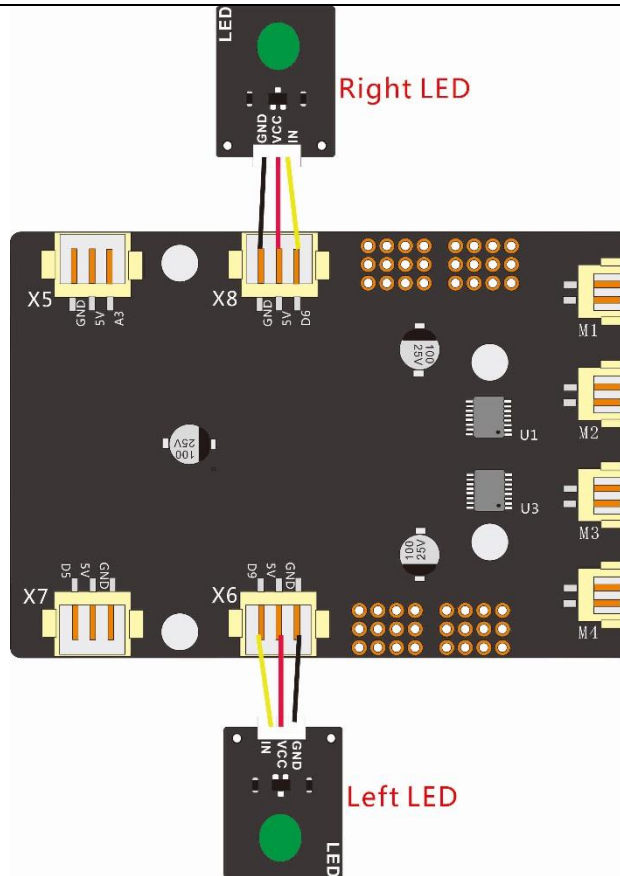

Connect the Green LED module to the control board	
Left LED module	X6 Connector of Control board
IN	D9
VCC	5V
GND	GND
Right LED module	X8 Connector of Control board
IN	D6
VCC	5V
GND	GND

4.Upload the code and test

The code used in this lesson is placed in the folder:


<E:\CKK0014-main\Tutorial\sketches>

Double-click the Arduino IDE shortcut on the desktop to open it.



3_1_light_led


Click “File”---“open”

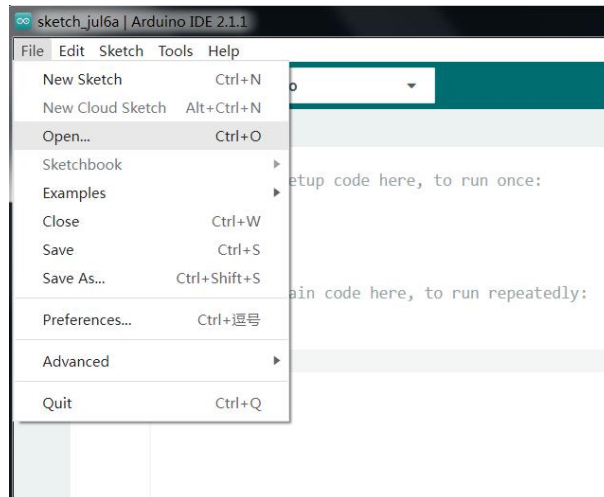


Select the code named 3_1_light_led in the folder:


[E:\CKK0014-main\Tutorial\sketches\3_1_light_led](#)

Click“open”, Open the program interface as follows

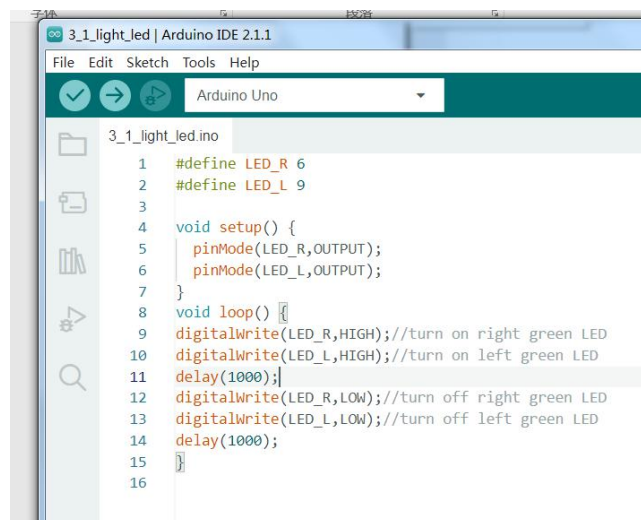

Click the compile button , "Done compiling" appears after the code compiling successfully.

Before uploading the code, turn the ESP-01 switch on the control board to the side away from the "ESP-01" silk screen.

Click the upload button , "Done uploading" appears after the code uploading successfully.

After the code is uploaded successfully, You can see that the two green modules turn on and off the green light in one second cycle.

Code **3_1_light_led.ino**

```
#define LED_R 6
#define LED_L 9

void setup() {
    pinMode(LED_R,OUTPUT);
    pinMode(LED_L,OUTPUT);
}

void loop() {
    digitalWrite(LED_R,HIGH);//turn on right green LED
    digitalWrite(LED_L,HIGH);//turn on left green LED
    delay(1000);
    digitalWrite(LED_R,LOW);//turn off right green LED
    digitalWrite(LED_L,LOW);//turn off left green LED
    delay(1000);
}
```


3_2_breathing_light

Select the code named 3_2_breathing_light in the folder:


[E:\CKK0014-main\Tutorial\sketches\3_2_breathing_light](#)


Click“open”,

Open the program interface as follows:

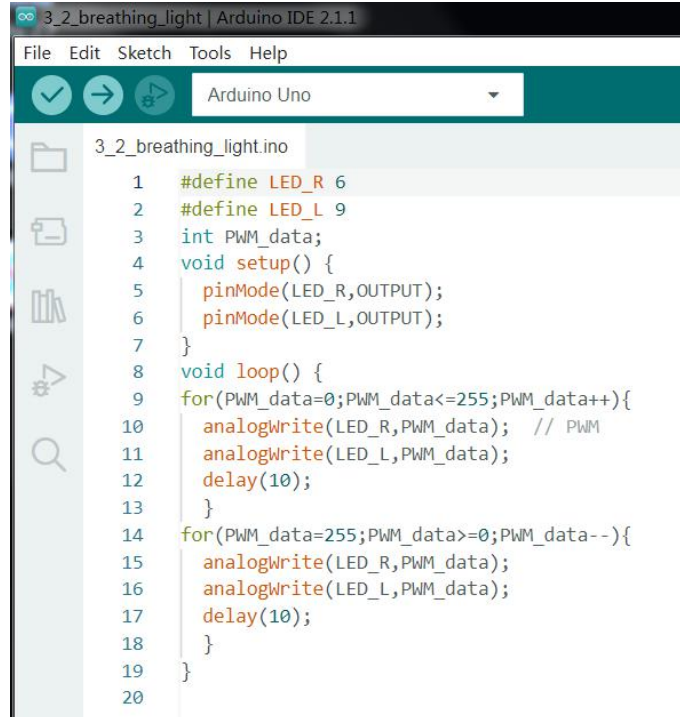

```
1  #define LED_R 6
2  #define LED_L 9
3  int PWM_data;
4  void setup() {
5      pinMode(LED_R,OUTPUT);
6      pinMode(LED_L,OUTPUT);
7  }
8  void loop() {
9      for(PWM_data=0;PWM_data<=255;PWM_data++){
10         analogWrite(LED_R,PWM_data); // PWM
11         analogWrite(LED_L,PWM_data);
12         delay(10);
13     }
14     for(PWM_data=255;PWM_data>=0;PWM_data--){
15         analogWrite(LED_R,PWM_data);
16         analogWrite(LED_L,PWM_data);
17         delay(10);
18     }
19 }
20
```

Click the compile button , "Done compiling" appears after the code compiling successfully

Click the upload button , "Done uploading" appears after the code uploading successfully.

After the code is uploaded successfully, You can see that the green light of both modules gradually brightens and then gradually darkens again, in a sequence of cycles.

Code 3_2_breathing_light.ino

```
#define LED_R 6
#define LED_L 9
```

```
int PWM_data;
void setup() {
  pinMode(LED_R,OUTPUT);
  pinMode(LED_L,OUTPUT);
}
void loop() {
  for(PWM_data=0;PWM_data<=255;PWM_data++){
    analogWrite(LED_R,PWM_data);  // PWM
    analogWrite(LED_L,PWM_data);
    delay(10);
  }
  for(PWM_data=255;PWM_data>=0;PWM_data--){
    analogWrite(LED_R,PWM_data);
    analogWrite(LED_L,PWM_data);
    delay(10);
  }
}
```

5.Any questions and suggestions are welcome

Thank you for reading this document!

If you find any errors and omissions in the tutorial, or if you have any suggestions and questions, please feel free to contact us at:

cokoino@outlook.com

We will do our best to make changes and publish revisions as soon as possible.

If you want to learn more about Arduino, Raspberry Pi, Smart Cars, Robotics and other interesting products in science and technology, please continue to visit our Amazon Store by search for "**LK COKOINO**" on Amazon. We will continue to launch fun, cost-effective, innovative and exciting products.

Thank you again for choosing Cokoino products.

LK COKOINO