

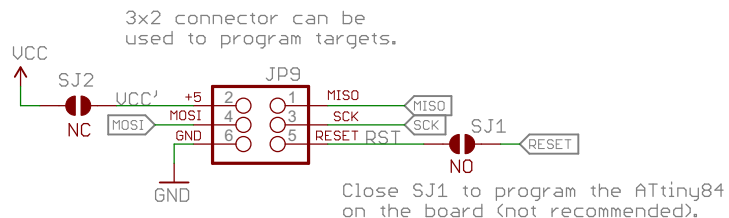
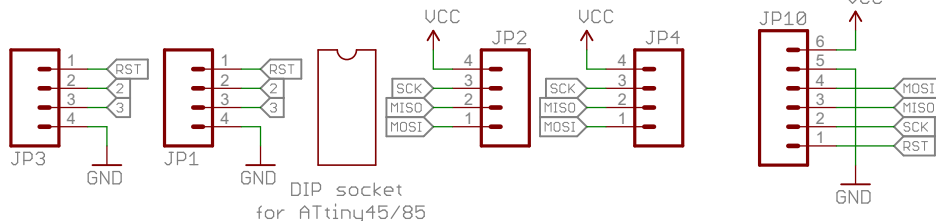



SJ2:
Closed: Target is powered from 5V USB
Open: Target must have external VCC provided



Changes on v1.2:
Capitalized on silk indicators
Squished PCB layout
Added 6-pin SIP to end of board
Added comments to schematic

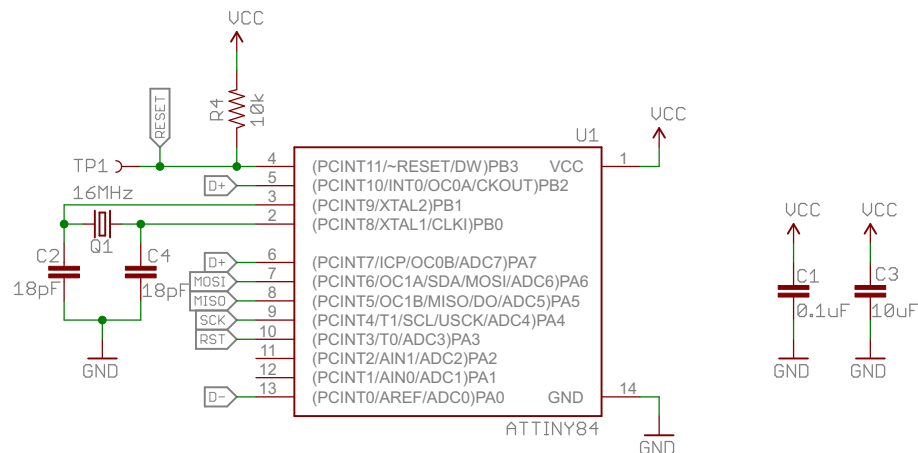

DIP socket for ATtiny45/85



open hardware

Released under the Creative Commons Attribution Share-Alike 3.0 License
<http://creativecommons.org/licenses/by-sa/3.0/>

TITLE: Tiny_Programmer_v12

Design by:
David A. Mellis, Jordan McConnell

REV:

Date: 4/3/2013 2:56:02 PM

Sheet: 1/1

SFE

SFE

SFE