

1

2

3

4

5

6

Review schematic: RGB888 / Bob / two line buffers

A

01 – RGB digitizer / TVP7002PZP

File: 01_adc.kicad_sch

A

02 – Line memory FPGA / GOWIN GW1N-4 QN88

File: 02_fpga.kicad_sch

B

03 – RGB DAC / ADV7125KSTZ140

File: 03_dac.kicad_sch

B

04 – DE-15 inputs/outputs and H/V level conversion

File: 04_connectors.kicad_sch

C

05 – USB 5V input and 3.3V / 1.9V / 1.2V supplies

File: 05_power.kicad_sch

C

06 – Reference clock, analog rail filtering and startup bias

File: 06_support.kicad_sch

D

DRAFT – NOT FOR FABRICATION

Sheet: /
File: amiga_scandoubler.kicad_sch

Title: **Amiga 1200 RGB line doubler**

Size: A4

Date: 2026-09-12

Rev: **0.13 REVIEW**

KiCad E.D.A. kicad-cli 7.0.6

Id: 1/7

1


2


3

4

5


6

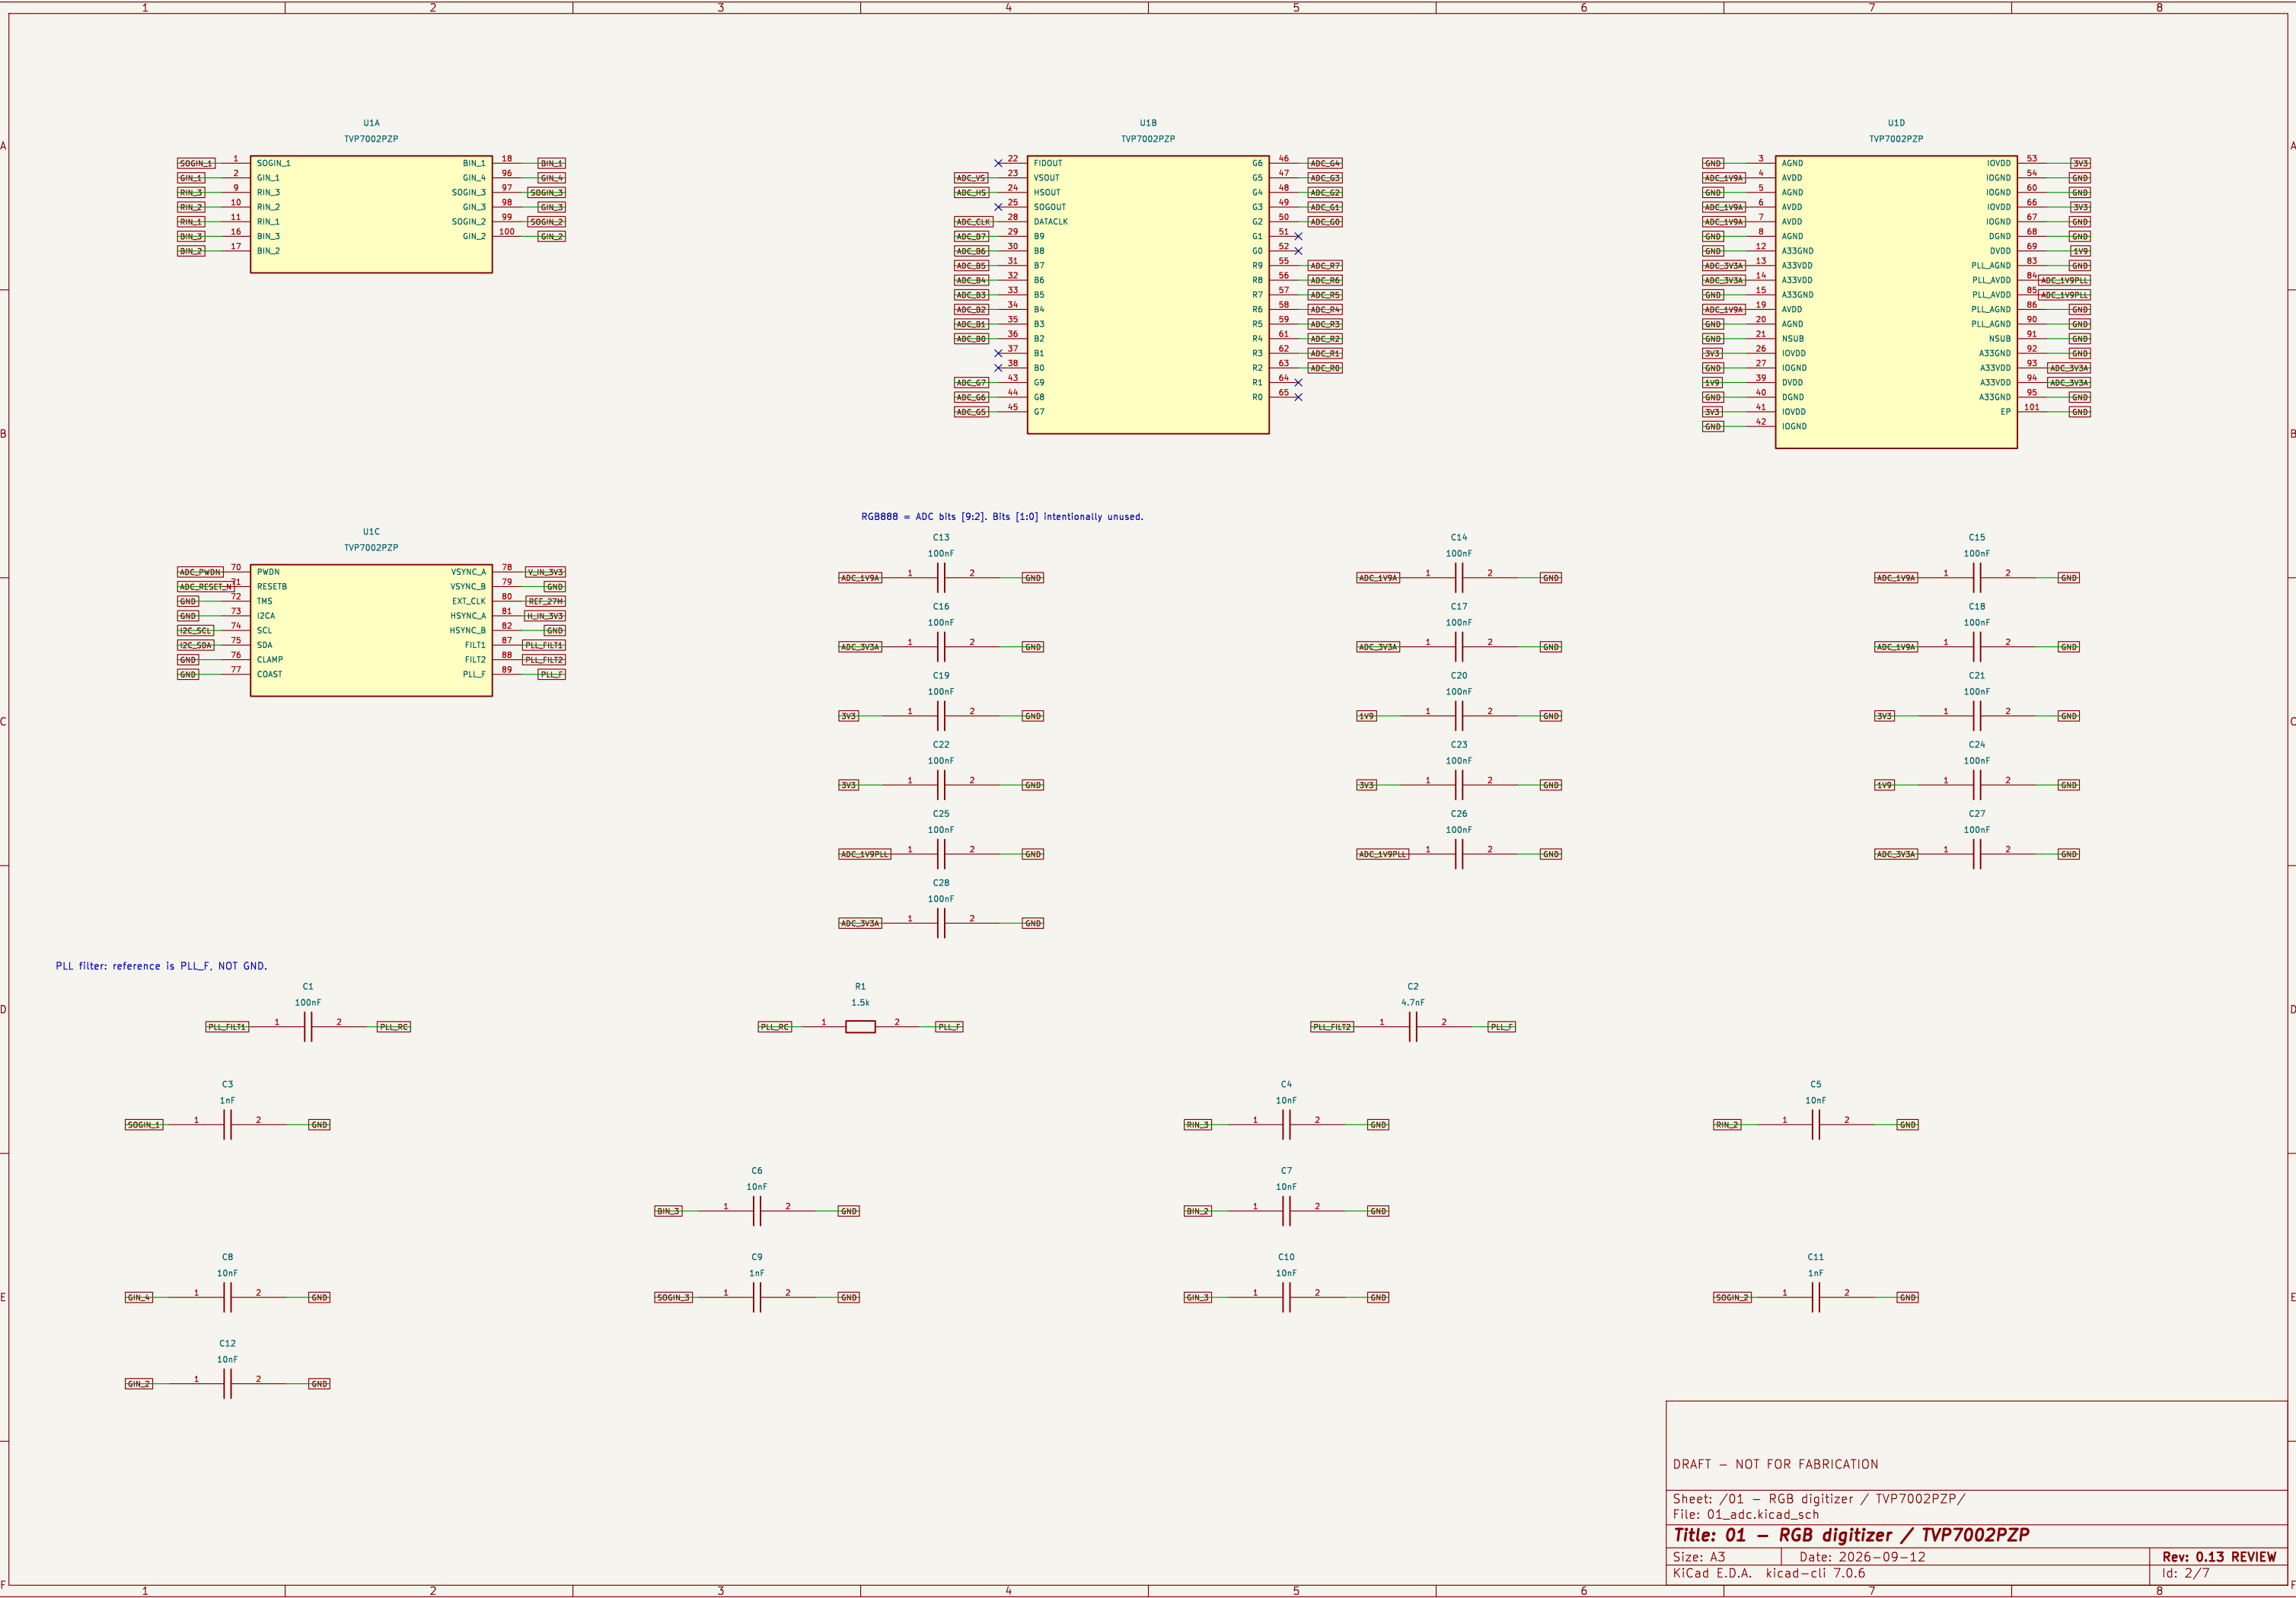

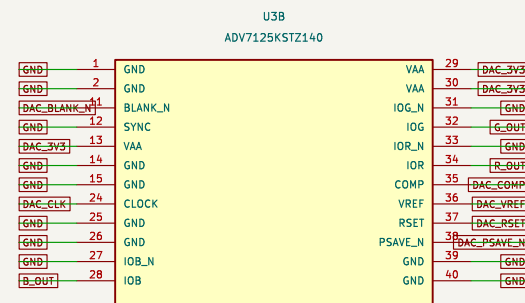

PSAVE_N: FPGA pin 56; LOW before configuration / clock loss.

Id: 3/7

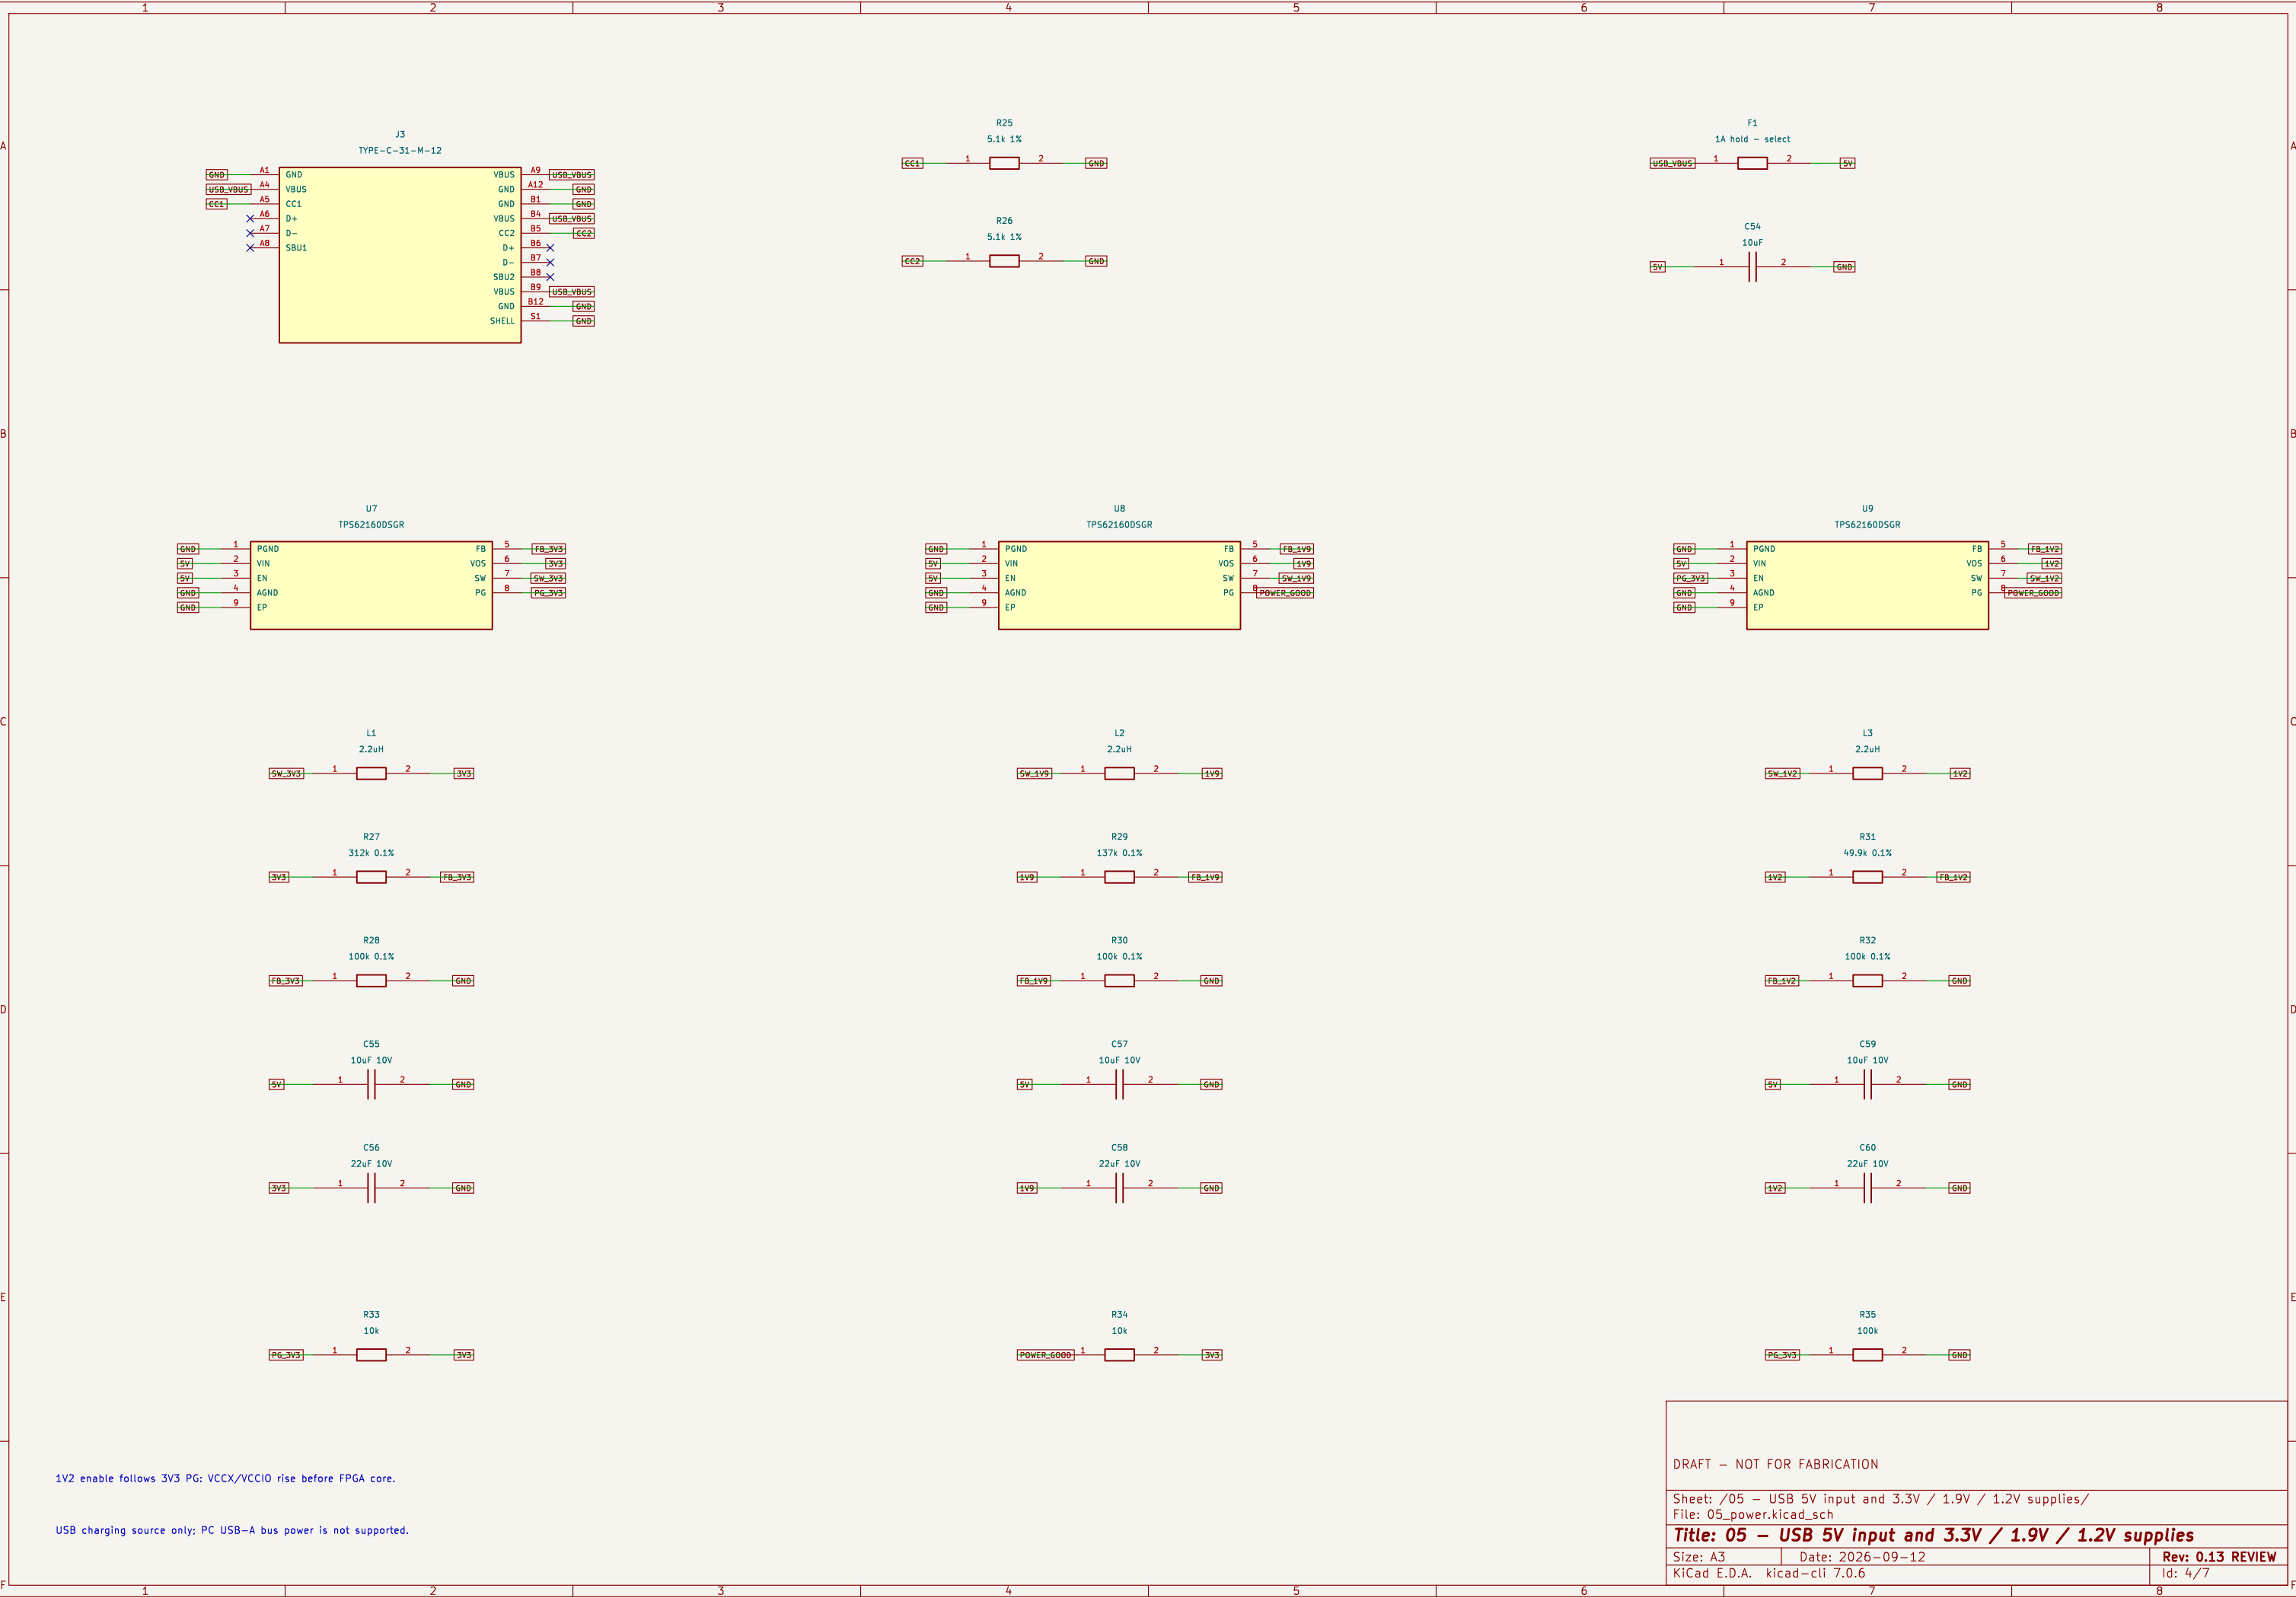

1V2 enable follows 3V3 PG: VCCX/VCCIO rise before FPGA core.

USB charging source only; PC USB-A bus power is not supported.

DRAFT – NOT FOR FABRICATION

Sheet: /05 – USB 5V input and 3.3V / 1.9V / 1.2V supplies/
File: 05_power.kicad_sch

Title: 05 – USB 5V input and 3.3V / 1.9V / 1.2V supplies

Size: A3 Date: 2026-09-12

Rev: 0.13 REVIEW

KiCad E.D.A. kicad-cli 7.0.6

Id: 4/7

