네트워크계층4

작성일시	@2022년 10월 25일 오전 1:24
강의날짜	@2022/10/25
편집일시	@2022년 10월 25일 오후 10:00
분야	네트워크
공부유형	스터디 그룹
복습	☐
태그	

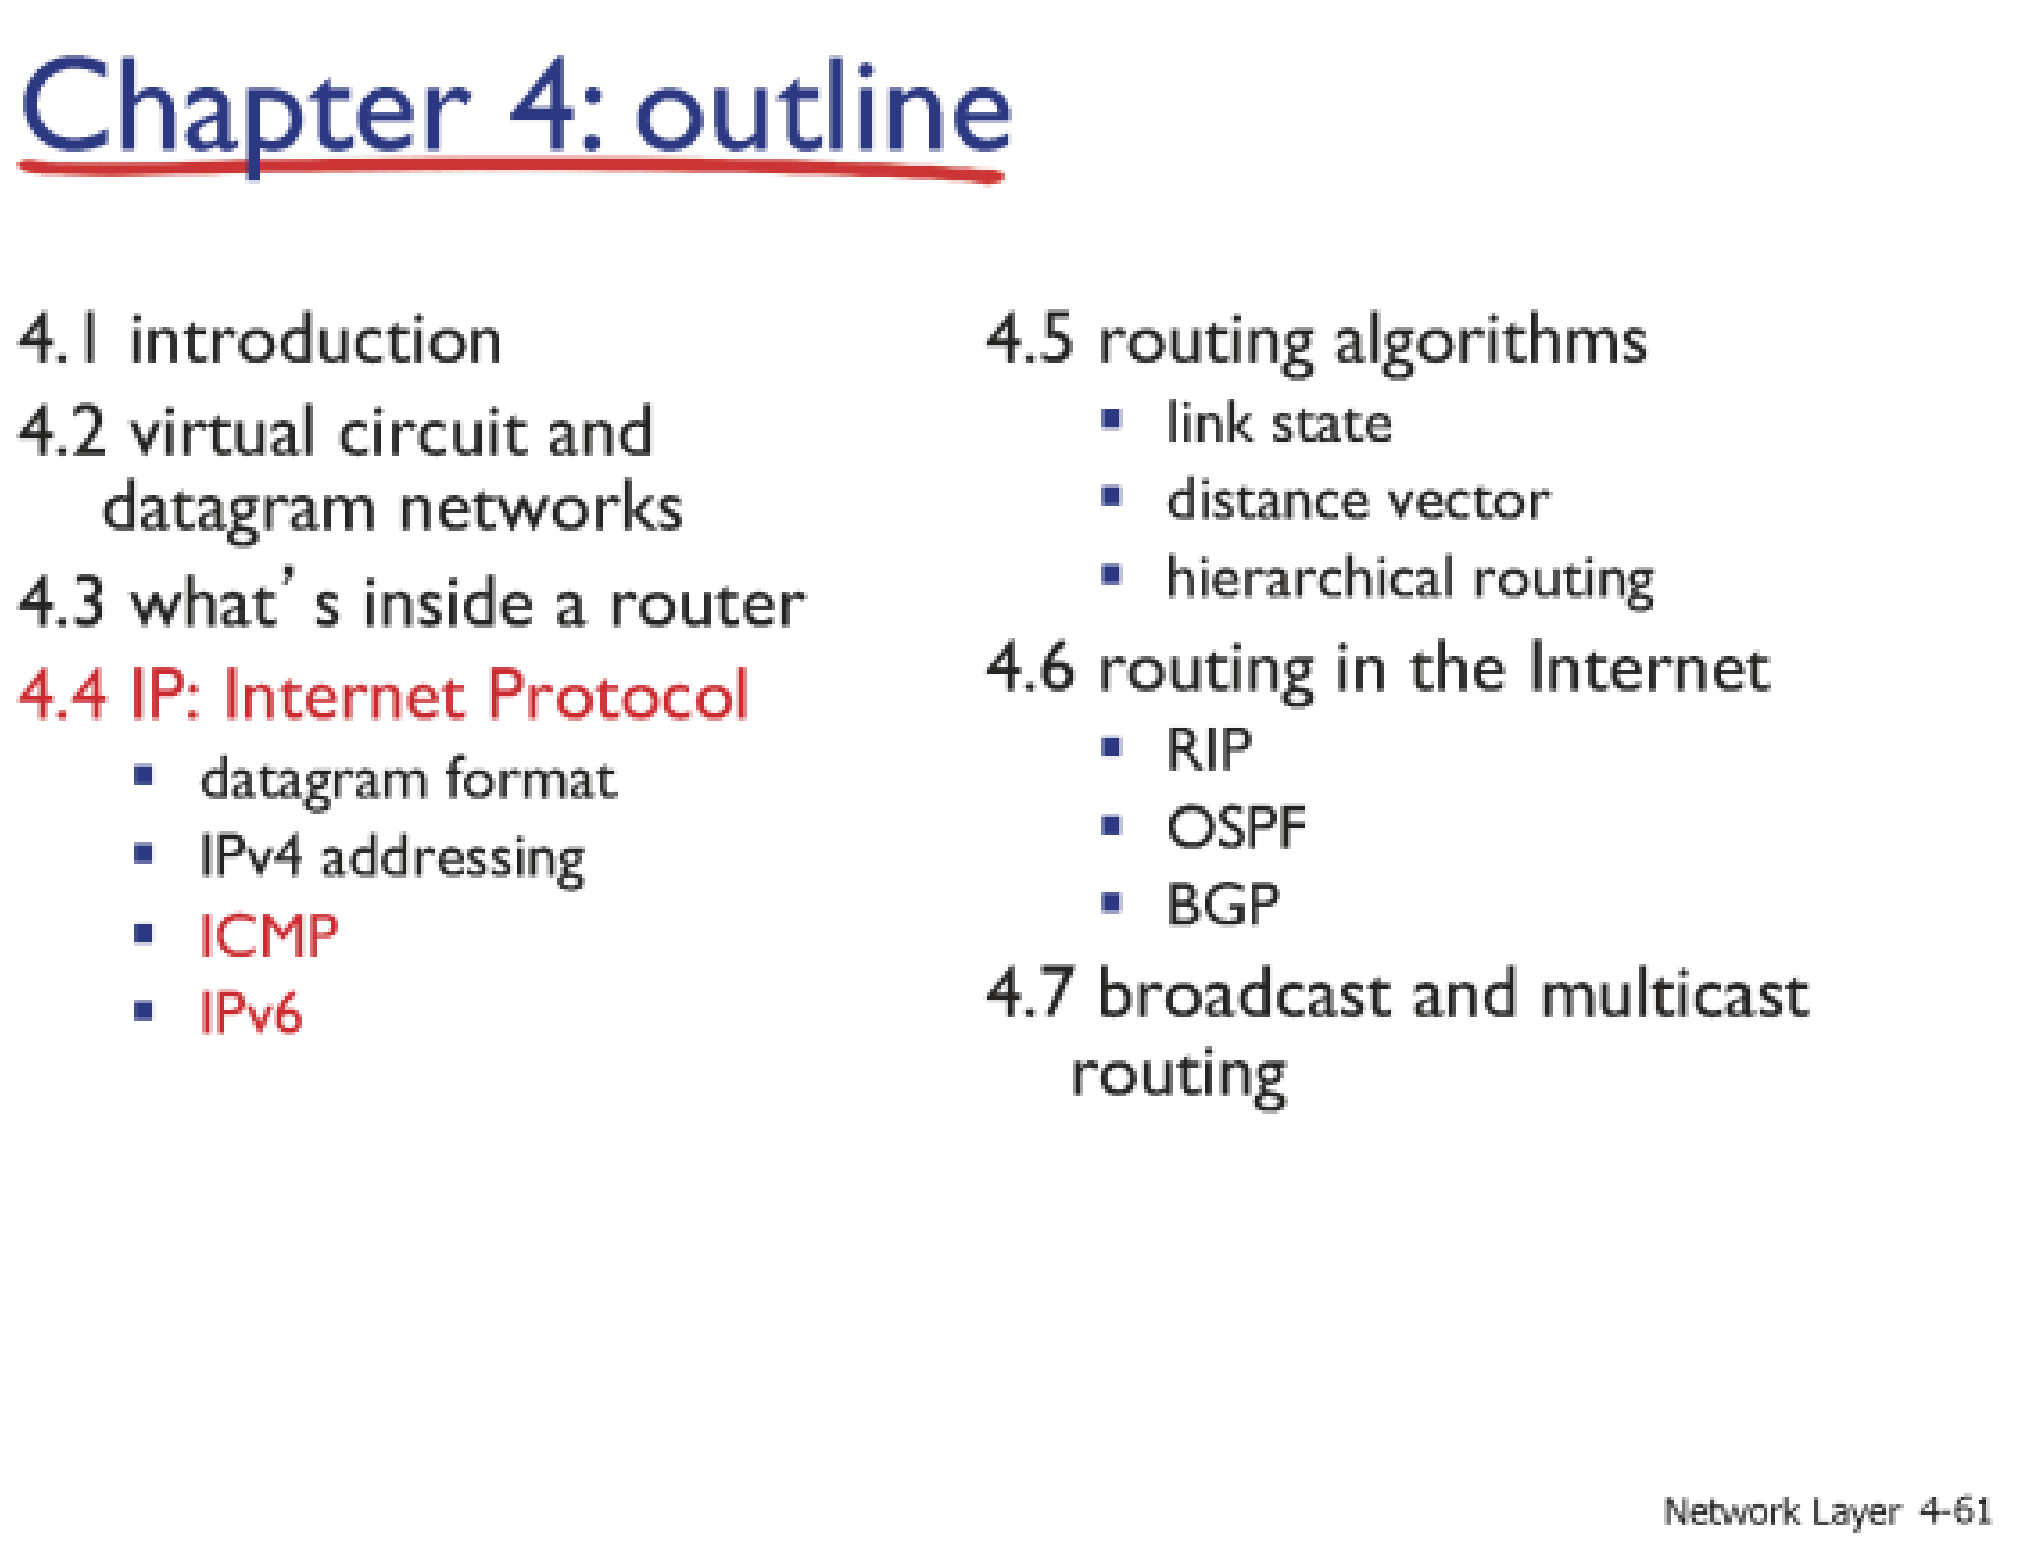

-

ICMP: internet control message protocol

- used by hosts & routers to communicate network-level information
  - error reporting: unreachable host, network, port, protocol
  - echo request/reply (used by ping)
- network-layer "above" IP:
  - ICMP msgs carried in IP datagrams
- ICMP message: type, code plus first 8 bytes of IP datagram causing error

Type	Code	description
0	0	echo reply (ping)
3	0	dest. network unreachable
3	1	dest host unreachable
3	2	dest protocol unreachable
3	3	dest port unreachable
3	6	dest network unknown
3	7	dest host unknown
4	0	source quench (congestion control - not used)
8	0	echo request (ping)
9	0	route advertisement
10	0	router discovery
11	0	TTL expired
12	0	bad IP header

Network Layer 4-62

- 컨트롤 메시지를 운반하기 위해 필요한것이 ICMP

Traceroute and ICMP

- source sends series of UDP segments to dest
  - first set has TTL =1
  - second set has TTL=2, etc.
  - unlikely port number
- when *n*th set of datagrams arrives to nth router:
  - router discards datagrams
  - and sends source ICMP messages (type 11, code 0)
  - ICMP messages includes name of router & IP address
- when ICMP messages arrives, source records RTTs

stopping criteria:

- UDP segment eventually arrives at destination host
- destination returns ICMP "port unreachable" message (type 3, code 3)
- source stops

IPv6: motivation

- *initial motivation:* 32-bit address space soon to be completely allocated.
- additional motivation:
  - header format helps speed processing/forwarding
  - header changes to facilitate QoS

IPv6 datagram format:

- fixed-length 40 byte header
- no fragmentation allowed

- 20년 전에 제안

IPv6 datagram format

priority: identify priority among datagrams in flow
flow Label: identify datagrams in same "flow."
(concept of "flow" not well defined).
next header: identify upper layer protocol for data

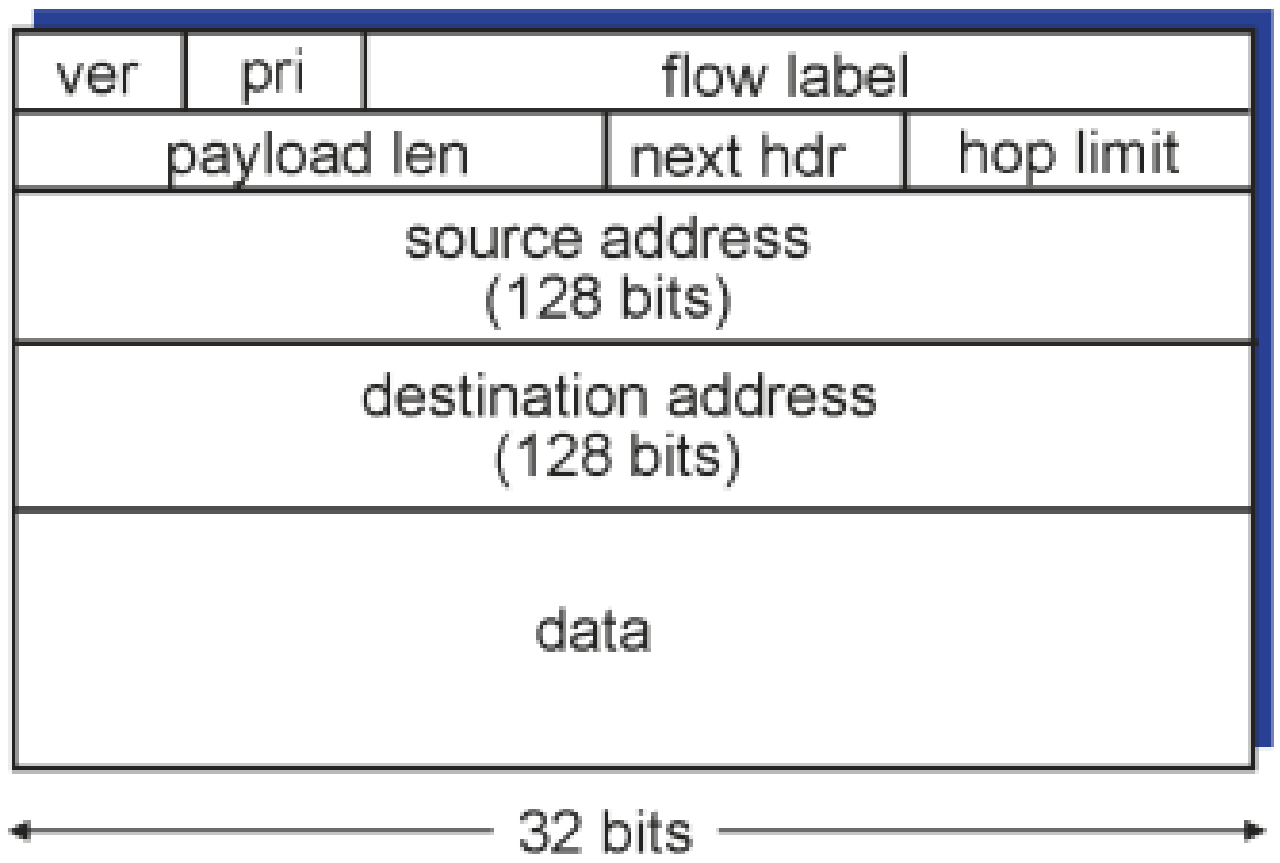

Network Layer 4-65

Other changes from IPv4

- *checksum:* removed entirely to reduce processing time at each hop
- *options:* allowed, but outside of header, indicated by "Next Header" field
- *ICMPv6:* new version of ICMP
  - additional message types, e.g. "Packet Too Big"
  - multicast group management functions

Network Layer 4-66

Transition from IPv4 to IPv6

- not all routers can be upgraded simultaneously
  - no "flag days"
  - how will network operate with mixed IPv4 and IPv6 routers?
- *tunneling:* IPv6 datagram carried as *payload* in IPv4 datagram among IPv4 routers

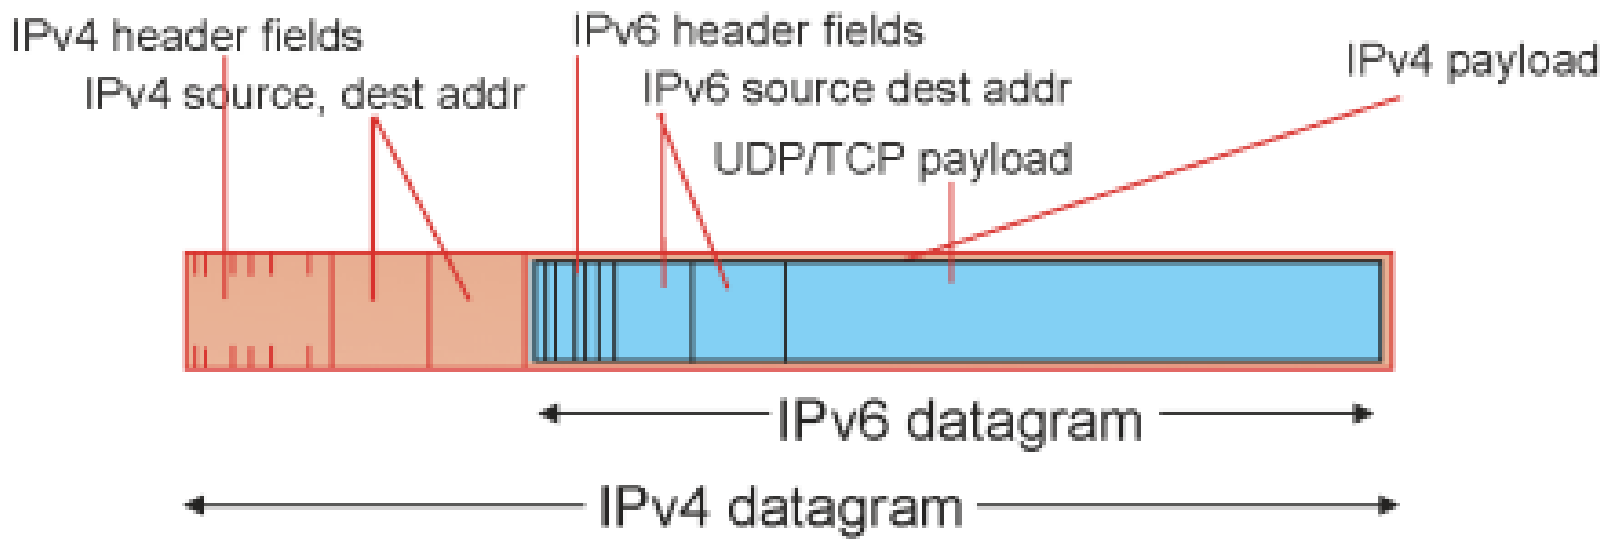

Network Layer 4-67

Tunneling

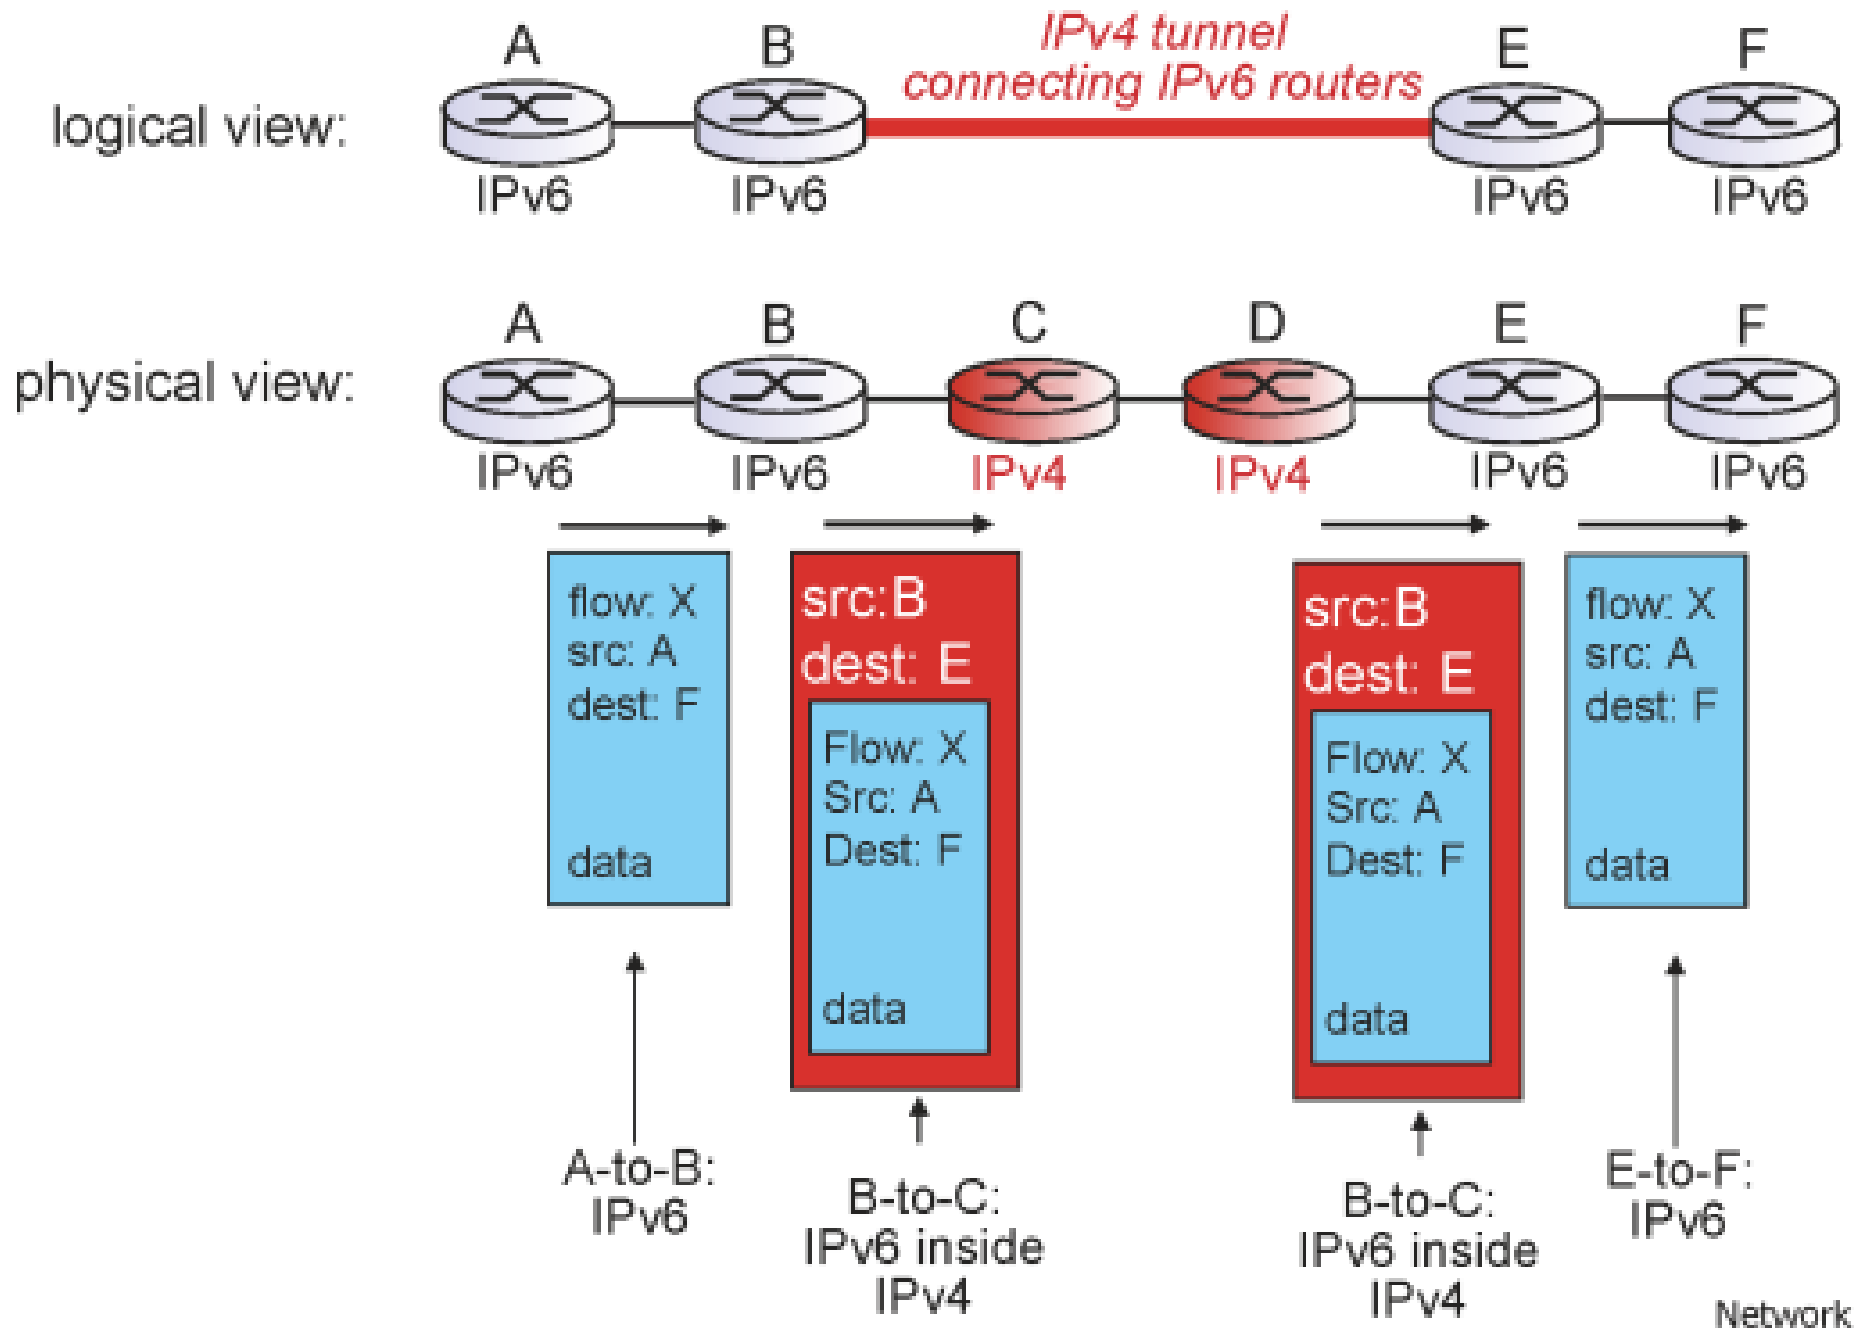

Network Layer 4-69

Chapter 4: outline

4.1 introduction

4.2 virtual circuit and datagram networks

4.3 what's inside a router

4.4 IP: Internet Protocol
- datagram format
- IPv4 addressing
- ICMP
- IPv6

4.5 routing algorithms
- link state
- distance vector
- hierarchical routing

4.6 routing in the Internet
- RIP
- OSPF
- BGP

4.7 broadcast and multicast routing

Network Layer 4-70

Interplay between routing, forwarding

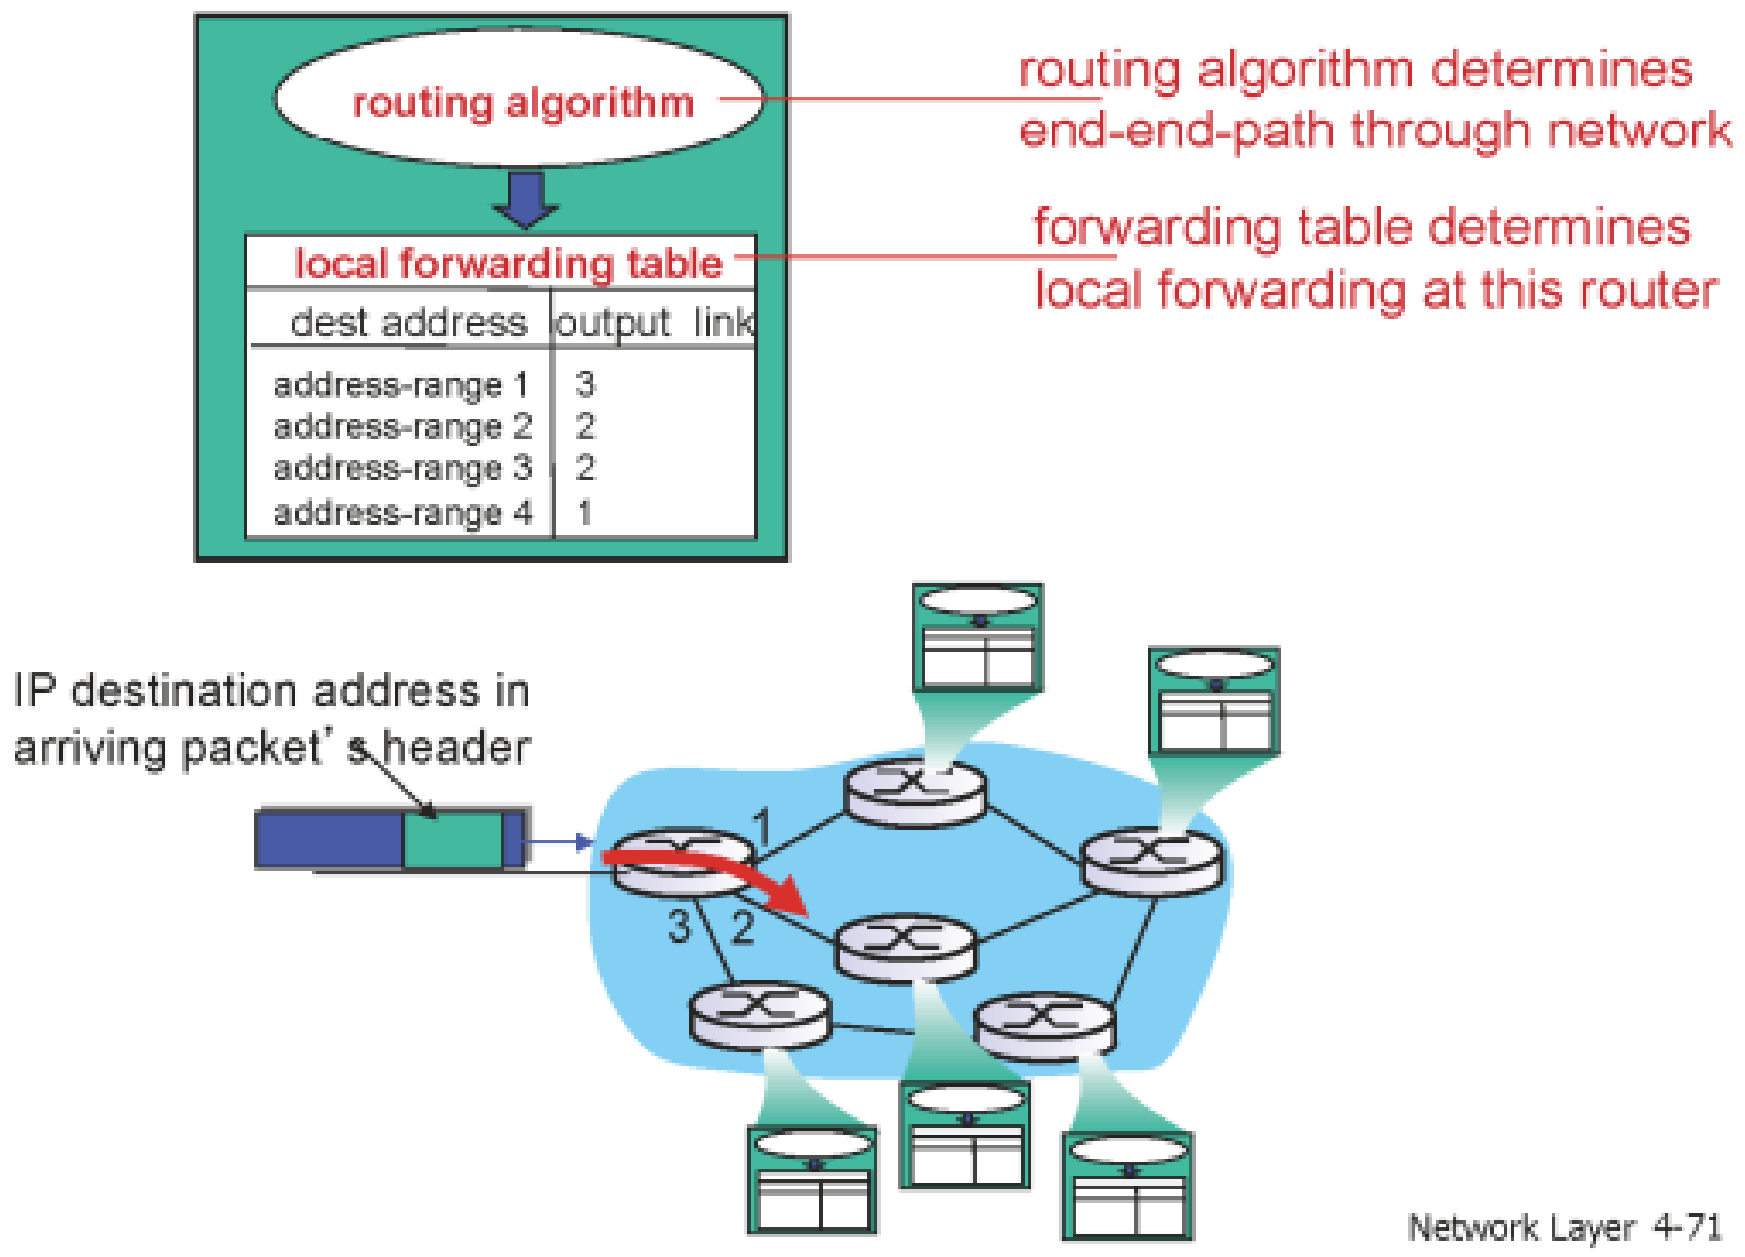

Network Layer 4-71

- 포워딩 : 라우터가 패킷을 받았을때패킷안에 들어있는 헤더의 데스티 아이피를 보고 포워딩 엔트리와 매칭 시켜서 보내는 것

- 포워딩 테이블 lookup 에 지나지 않음

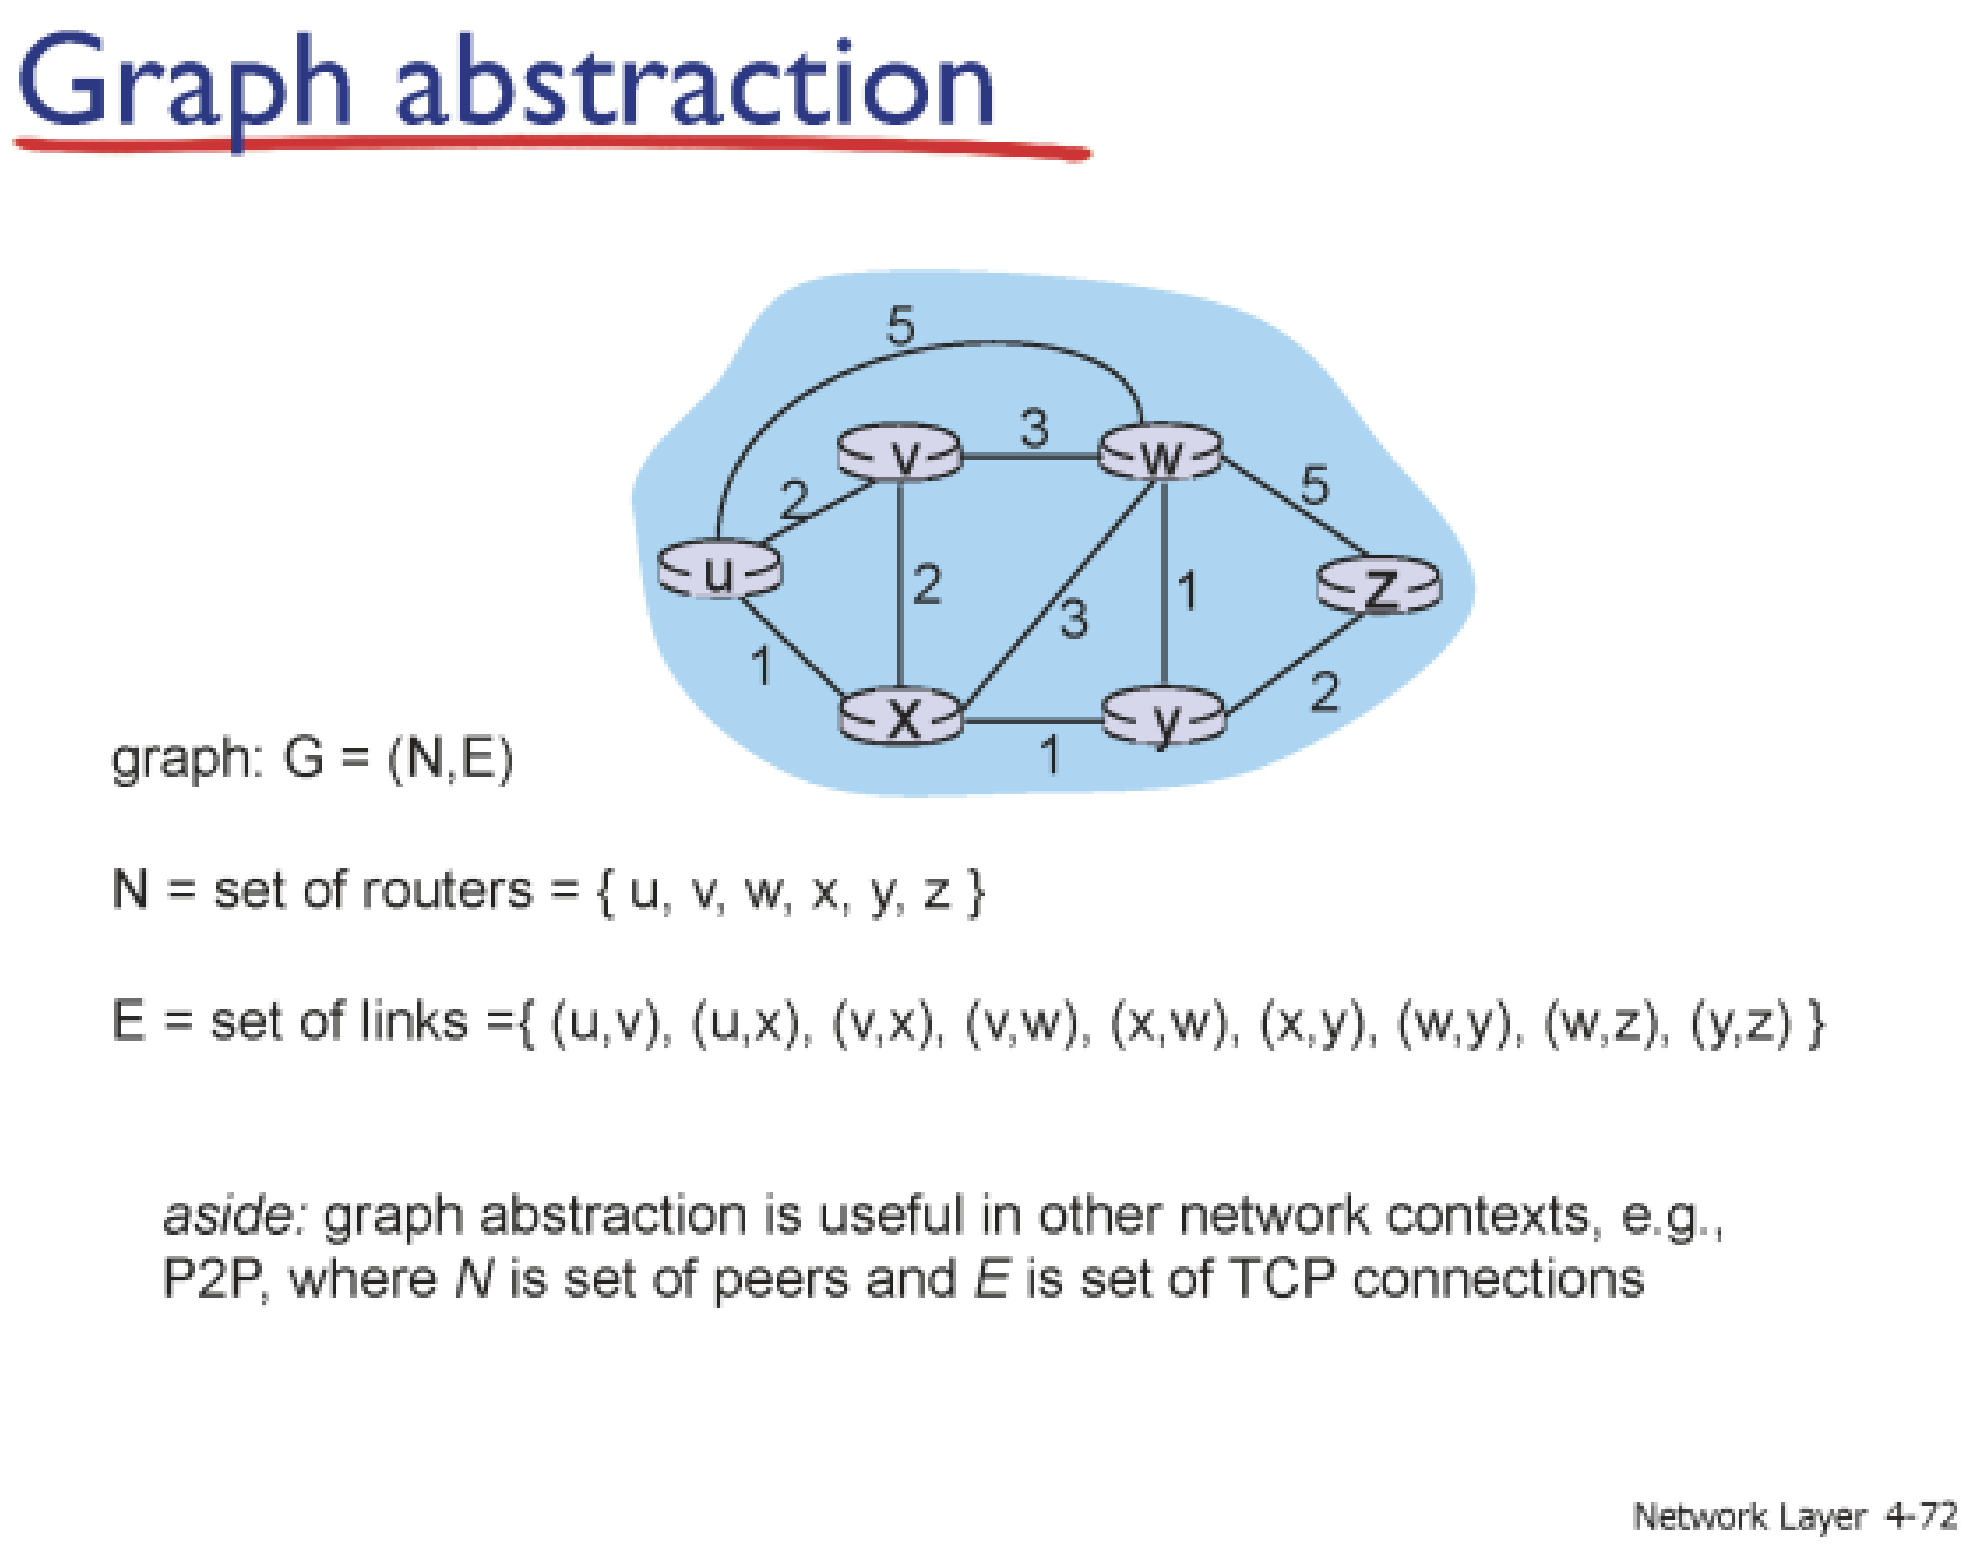

- 최단 경로 구하기
- 목적지까지 최소 cost의 경로를 구하기

Graph abstraction: costs

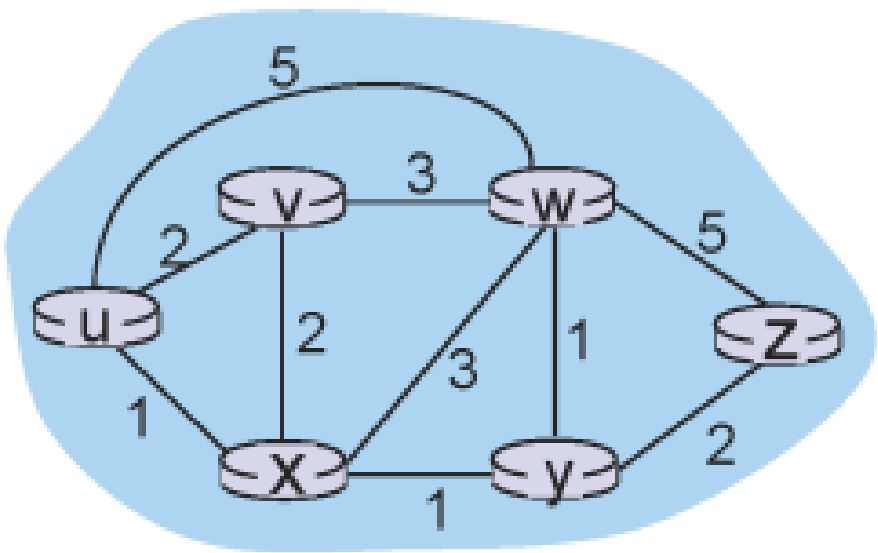

c(x,x') = cost of link (x,x')
e.g., c(w,z) = 5

cost could always be 1, or inversely related to bandwidth, or inversely related to congestion

cost of path $(x_1, x_2, x_3, \ldots, x_p) = c(x_1,x_2) + c(x_2,x_3) + \ldots + c(x_{p-1},x_p)$

key question: what is the least-cost path between u and z ?
routing algorithm: algorithm that finds that least cost path

Network Layer 4-73

- 두가지

1. link state : 네트워크를 다 알고 하는 경우
2. distance vector : 이웃과만 정보를 구하고 하는 경우

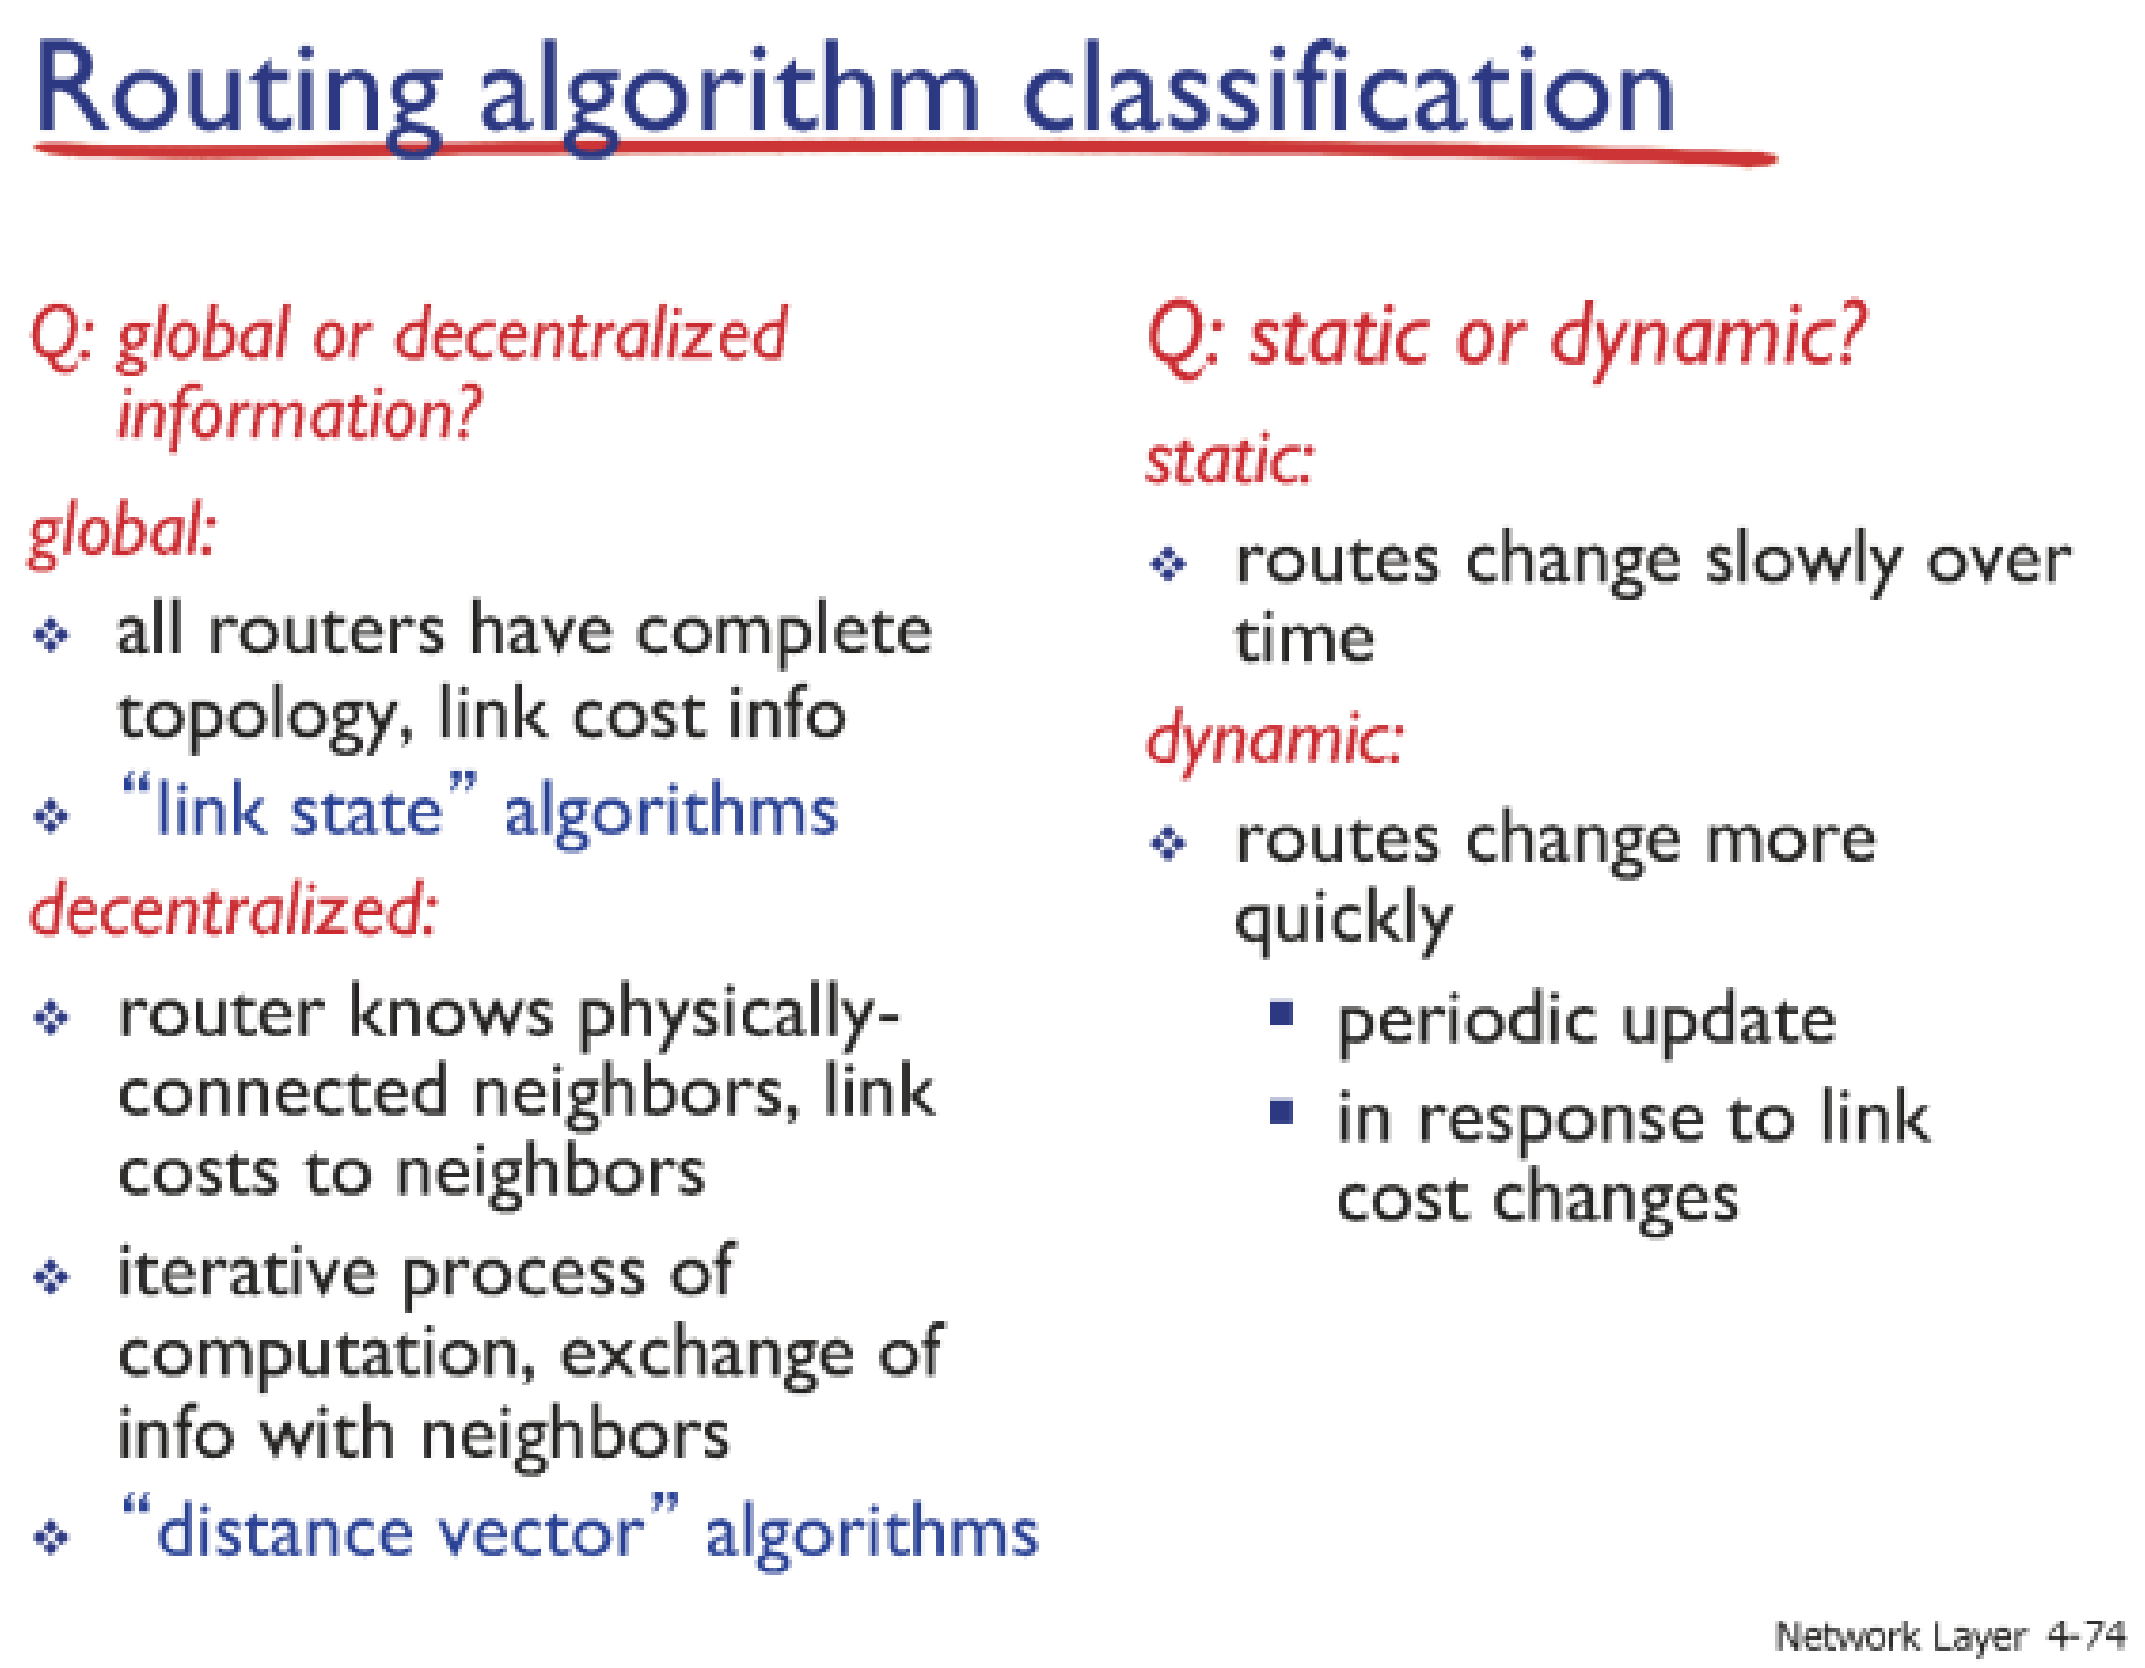

- link state
- 모든 노드들이 자신의 링크 정보를 브로드캐스트에 뿌려놔야함
- 다익스트라 알고리즘으로 포워딩 채우기

Chapter 4: outline

4.1 introduction

4.2 virtual circuit and datagram networks

4.3 what's inside a router

4.4 IP: Internet Protocol

- datagram format
- IPv4 addressing
- ICMP
- IPv6

4.5 routing algorithms

- link state
- distance vector
- hierarchical routing

4.6 routing in the Internet

- RIP
- OSPF
- BGP

4.7 broadcast and multicast routing

A Link-State Routing Algorithm

Dijkstra's algorithm

- net topology, link costs known to all nodes
  - accomplished via "link state broadcast"
  - all nodes have same info
- computes least cost paths from one node ('source") to all other nodes
  - gives *forwarding table* for that node
- iterative: after k iterations, know least cost path to k dest.'s

notation:

- c(x,y): link cost from node x to y; = ∞ if not direct neighbors
- D(v): current value of cost of path from source to dest. v
- p(v): predecessor node along path from source to v
- N': set of nodes whose least cost path definitively known

Dijsktra's Algorithm

```
Initialization:
  N' = {u}
  for all nodes v
    if v adjacent to u
       then D(v) = c(u,v)
    else D(v) = ∞

Loop
  find w not in N' such that D(w) is a minimum
  add w to N'
  update D(v) for all v adjacent to w and not in N' :
     D(v) = min( D(v), D(w) + c(w,v) )
  /* new cost to v is either old cost to v or known
   shortest path cost to w plus cost from w to v */
until all nodes in N'
```

Network Layer 4-77

-

Example

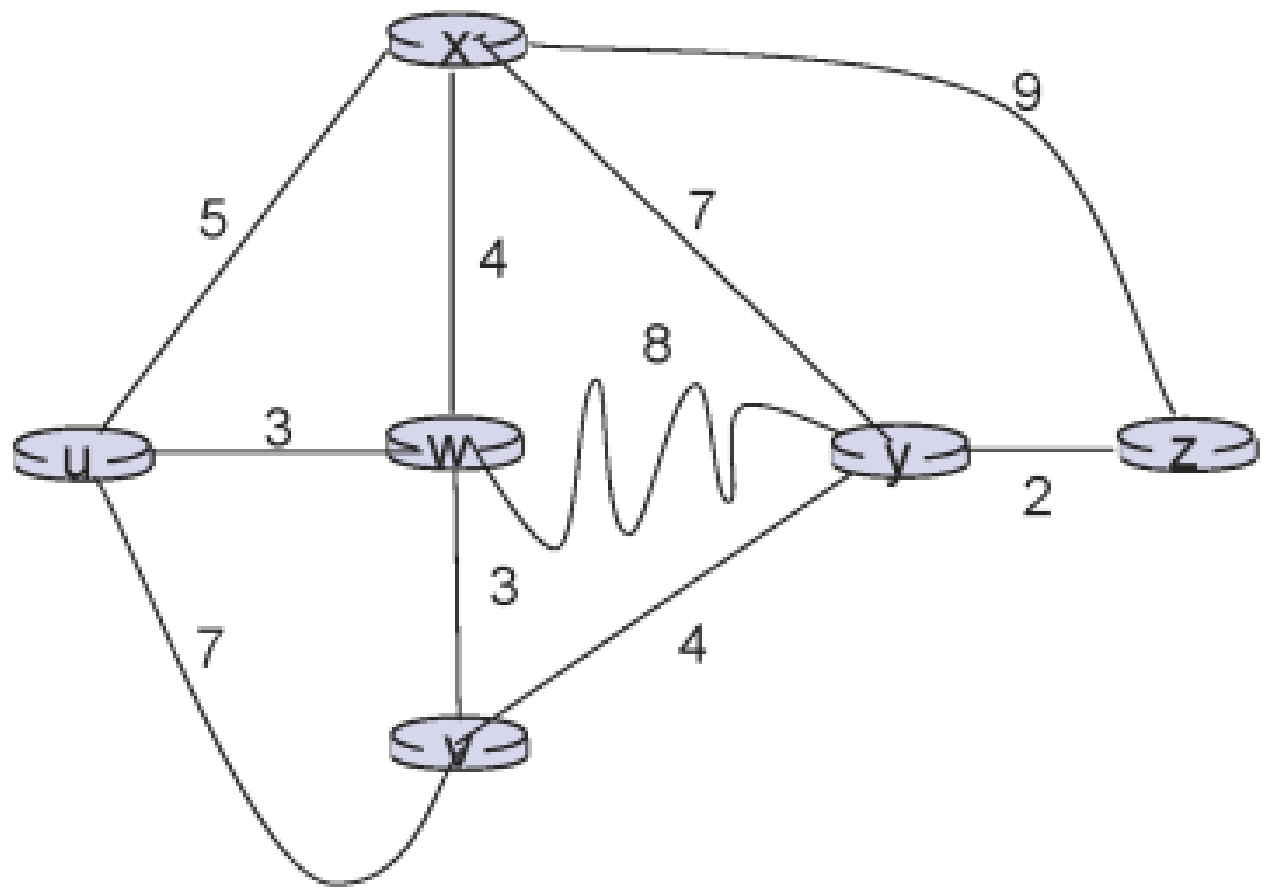

Initialization:
  N' = {u}
  for all nodes v
    if v adjacent to u
      then D(v) = c(u,v)
    else D(v) = ∞

Loop
  find w not in N' such that D(w) is a minimum
  add w to N'
  update D(v) for all v adjacent to w and not in N' :
    D(v) = min(D(v), D(w) + c(w,v))
  /* new cost to v is either old cost to v or known
   shortest path cost to w plus cost from w to v */
until all nodes in N'

Network Layer 4-78

Dijkstra's algorithm: example

Step	N'	D(v) p(v)	D(w) p(w)	D(x) p(x)	D(y) p(y)	D(z) p(z)
0	u	7,u	3,u	5,u	∞	∞
1	uw	6,w		5,u	11,w	∞
2	uwx	6,w			11,w	14,x
3	uwxv				10,v	14,x
4	uwxvy					12,y
5	uwxvyz					

notes:

- construct shortest path tree by tracing predecessor nodes
- ties can exist (can be broken arbitrarily)

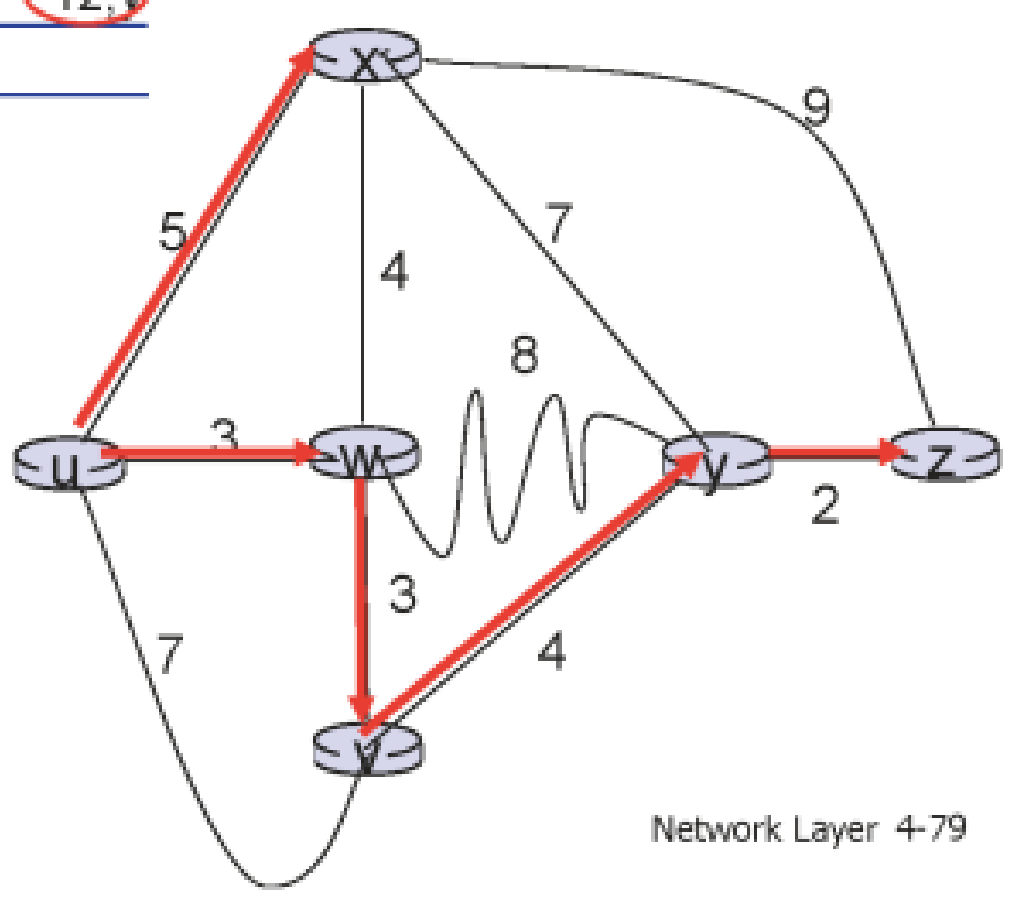

Network Layer 4-79

Dijkstra's algorithm, discussion

algorithm complexity: n nodes
- each iteration: need to check all nodes, w, not in N
- n(n+1)/2 comparisons: $O(n^2)$
- more efficient implementations possible: O(nlogn)

oscillations possible:
- e.g., support link cost equals amount of carried traffic:

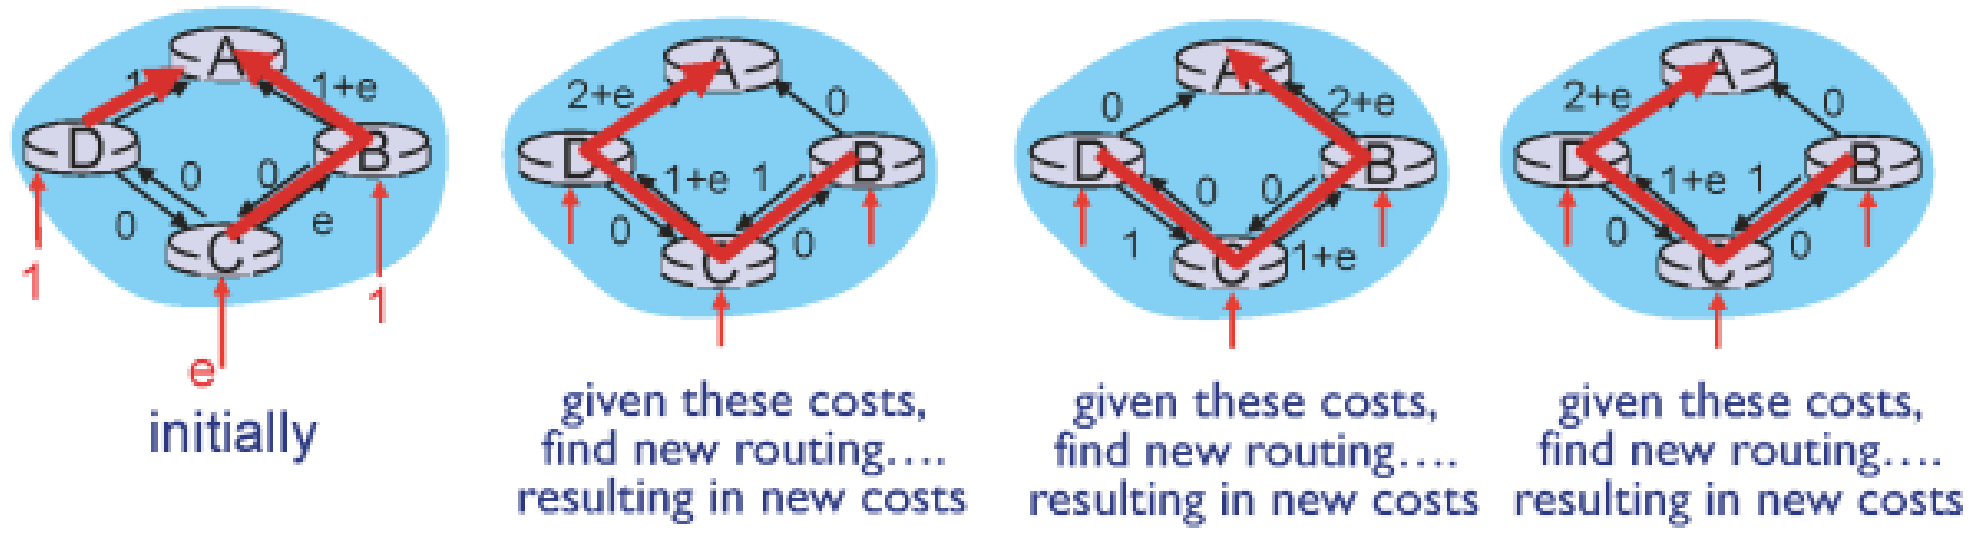

Chapter 4: outline

4.1 introduction
4.2 virtual circuit and datagram networks
4.3 what's inside a router
4.4 IP: Internet Protocol
- datagram format
- IPv4 addressing
- ICMP
- IPv6

4.5 routing algorithms
- link state
- distance vector
- hierarchical routing

4.6 routing in the Internet
- RIP
- OSPF
- BGP

4.7 broadcast and multicast routing

Distance vector algorithm

Bellman-Ford equation (dynamic programming)

let

$d_x(y)$:= cost of least-cost path from x to y

then

$$d_x(y) = \min_v \{c(x,v) + d_v(y)\}$$

cost from neighbor v to destination y

cost to neighbor v

min taken over all neighbors v of x

Network Layer 4-84

- link state 알고리즘은 직관적임
- distance vector는 이웃들과만 교류한 메시지로 테이블을 만들음 직관적이지 못함
- x에서 y까지 최소 경로는 무조건 x의 이웃 중에 하나를 거쳐서 감
- dv(y)는 recursion으로 구함 ⇒ 직관적이지 않음