네트워크계층4

작성일시	@2022년 10월 25일 오전 1:24
강의날짜	
편집일시	@2022년 10월 25일 오전 1:28
분야	
공부유형	
복습	☐
태그	

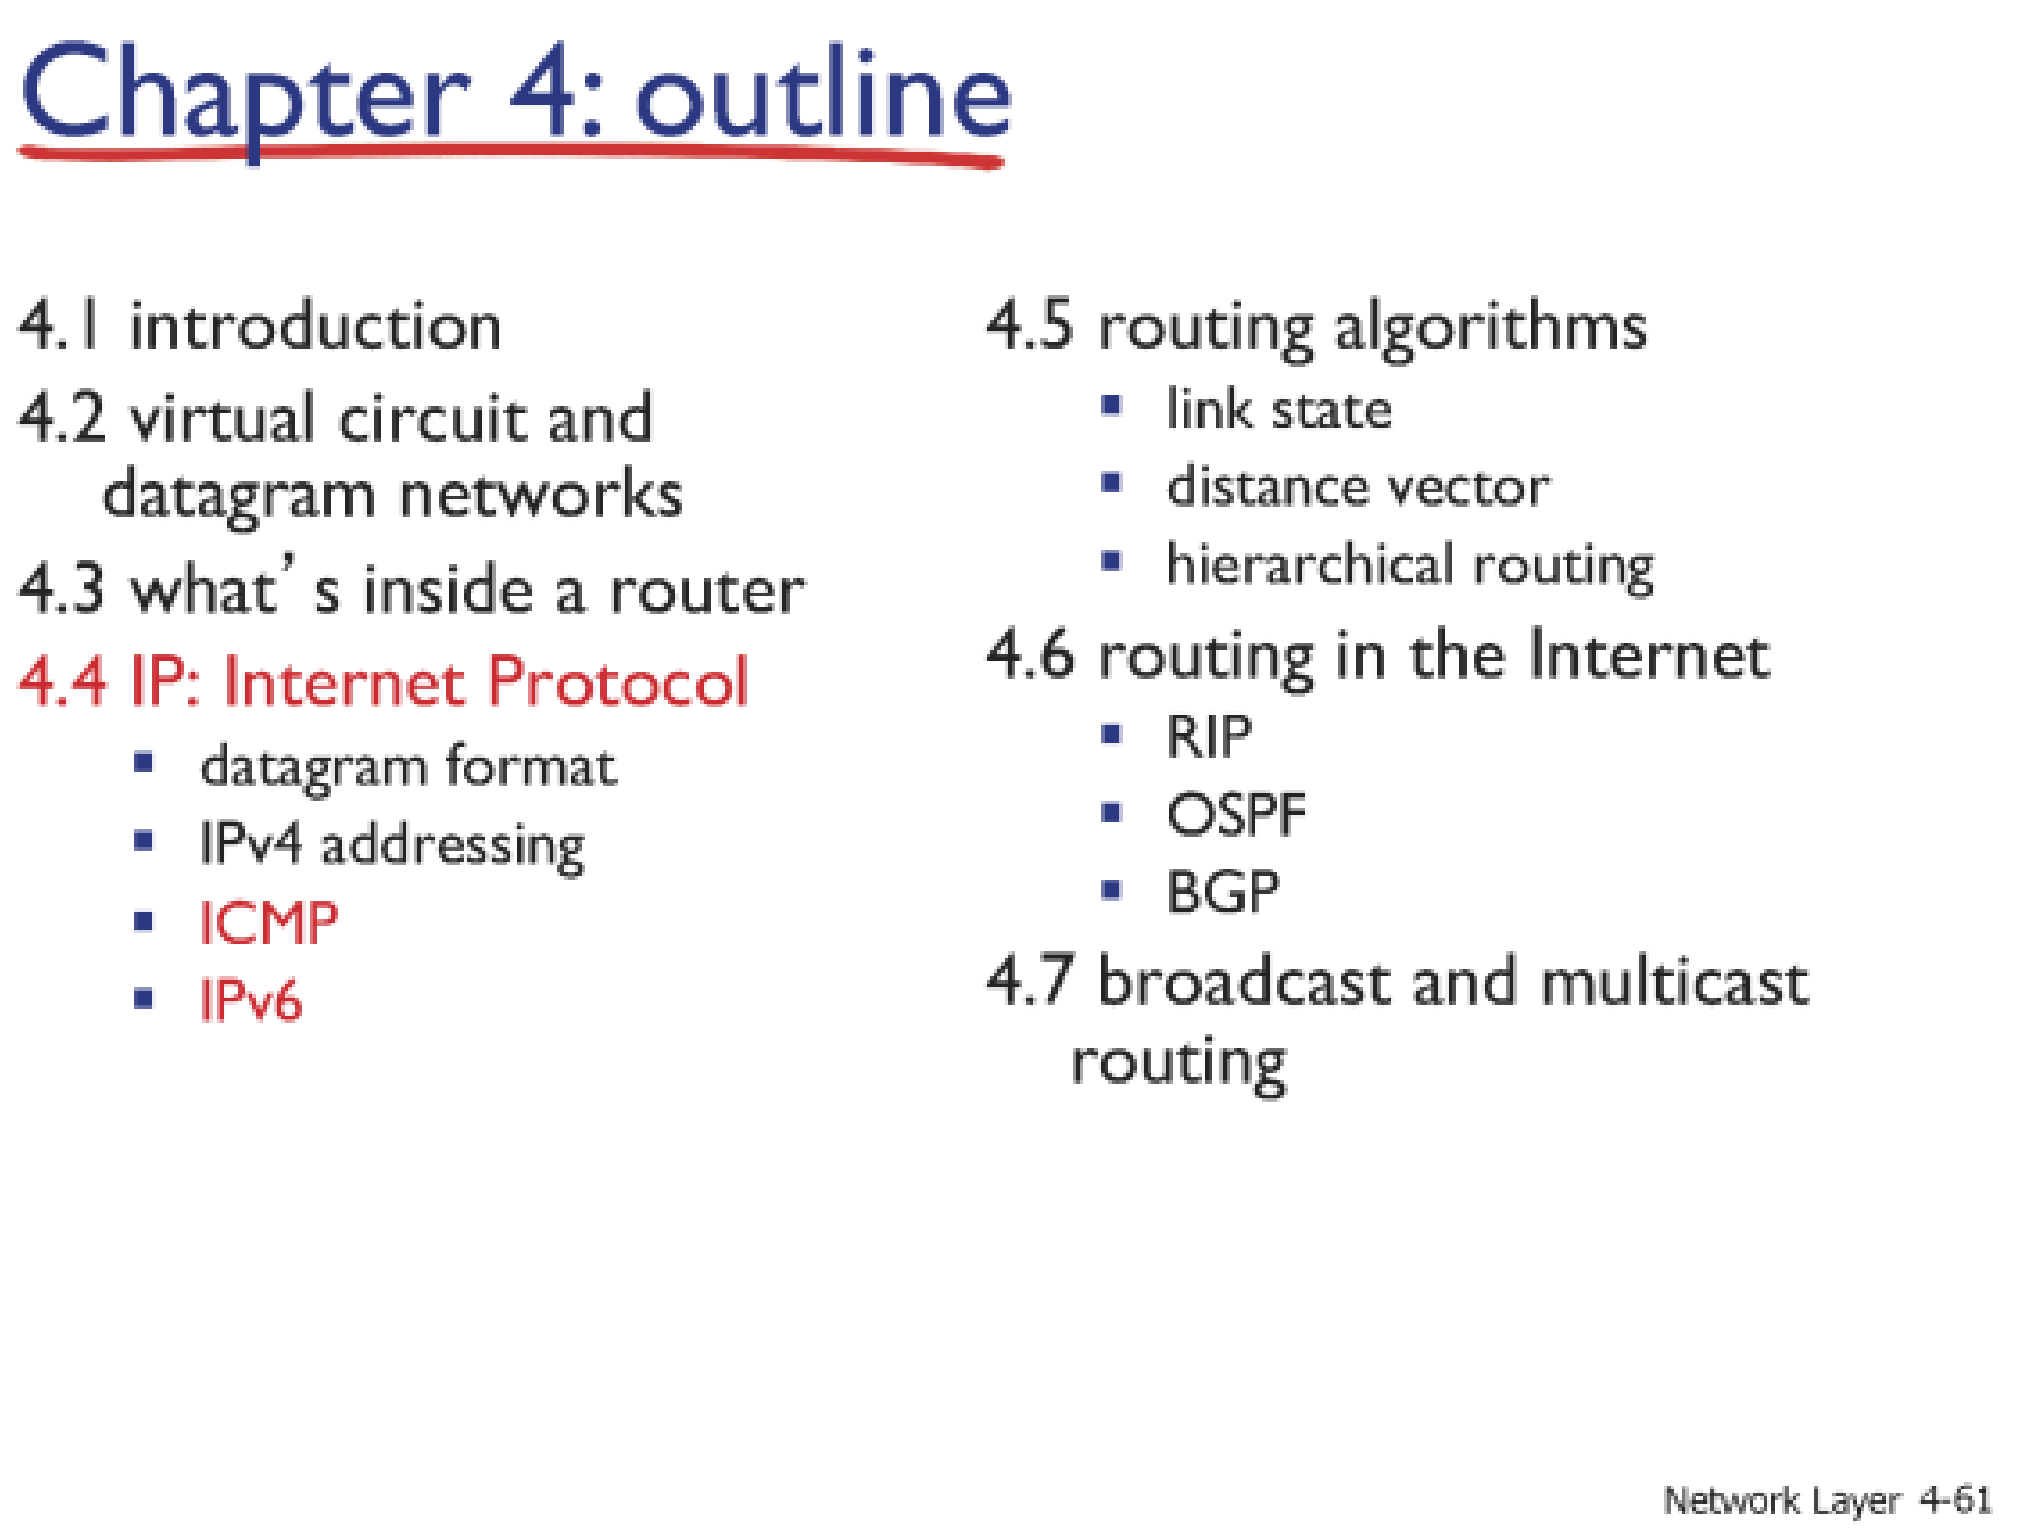

ICMP: internet control message protocol

- used by hosts & routers to communicate network-level information
  - error reporting: unreachable host, network, port, protocol
  - echo request/reply (used by ping)
- network-layer "above" IP:
  - ICMP msgs carried in IP datagrams
- ICMP message: type, code plus first 8 bytes of IP datagram causing error

Type	Code	description
0	0	echo reply (ping)
3	0	dest. network unreachable
3	1	dest host unreachable
3	2	dest protocol unreachable
3	3	dest port unreachable
3	6	dest network unknown
3	7	dest host unknown
4	0	source quench (congestion control - not used)
8	0	echo request (ping)
9	0	route advertisement
10	0	router discovery
11	0	TTL expired
12	0	bad IP header

Network Layer 4-62

Traceroute and ICMP

- source sends series of UDP segments to dest
  - first set has TTL =1
  - second set has TTL=2, etc.
  - unlikely port number
- when *n*th set of datagrams arrives to nth router:
  - router discards datagrams
  - and sends source ICMP messages (type 11, code 0)
  - ICMP messages includes name of router & IP address
- when ICMP messages arrives, source records RTTs

stopping criteria:

- UDP segment eventually arrives at destination host
- destination returns ICMP "port unreachable" message (type 3, code 3)
- source stops

Network Layer 4-63

IPv6: motivation

- *initial motivation:* 32-bit address space soon to be completely allocated.
- additional motivation:
  - header format helps speed processing/forwarding
  - header changes to facilitate QoS

IPv6 datagram format:
  - fixed-length 40 byte header
  - no fragmentation allowed

IPv6 datagram format

priority: identify priority among datagrams in flow
flow Label: identify datagrams in same "flow."
(concept of "flow" not well defined).
next header: identify upper layer protocol for data

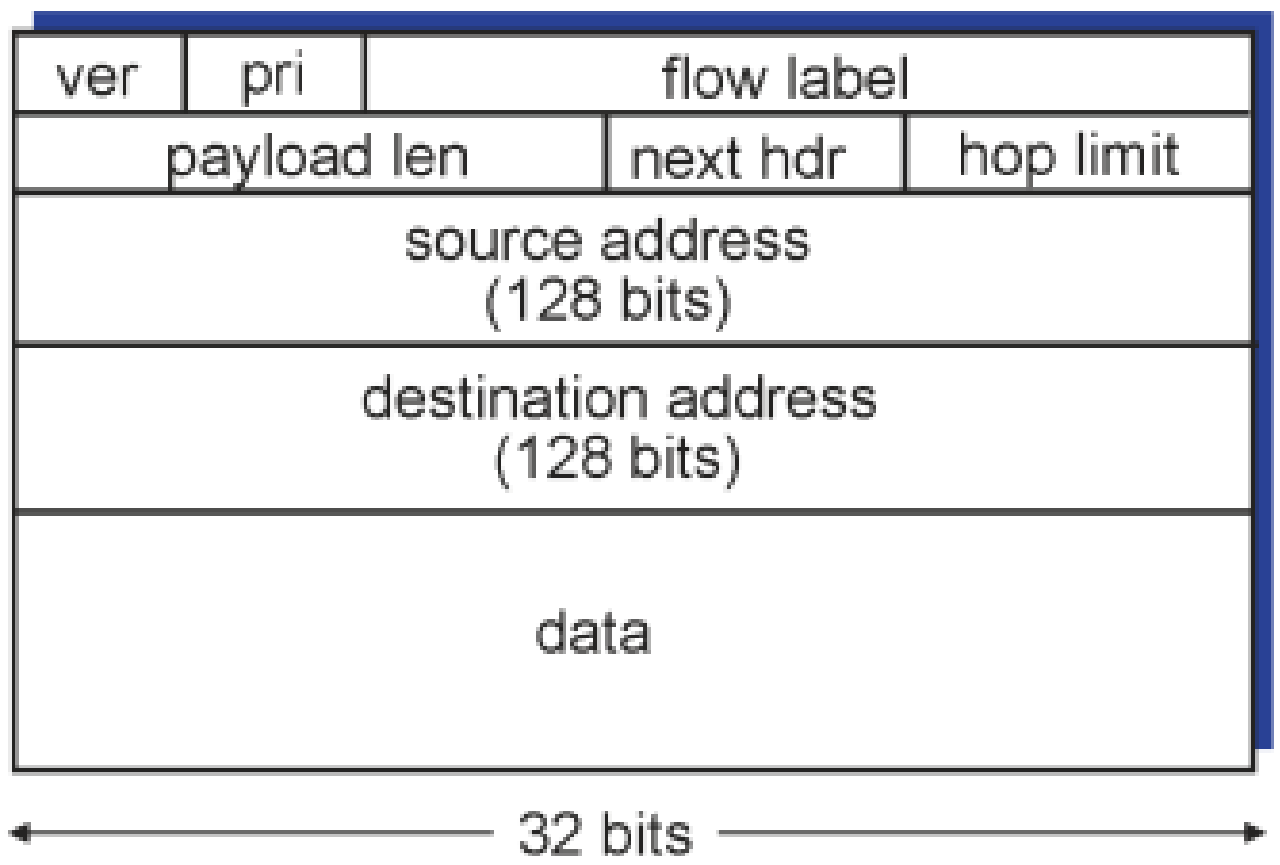

Other changes from IPv4

- *checksum:* removed entirely to reduce processing time at each hop
- *options:* allowed, but outside of header, indicated by "Next Header" field
- *ICMPv6:* new version of ICMP
  - additional message types, e.g. "Packet Too Big"
  - multicast group management functions

Network Layer 4-66

Transition from IPv4 to IPv6

- not all routers can be upgraded simultaneously
  - no "flag days"
  - how will network operate with mixed IPv4 and IPv6 routers?
- *tunneling:* IPv6 datagram carried as *payload* in IPv4 datagram among IPv4 routers

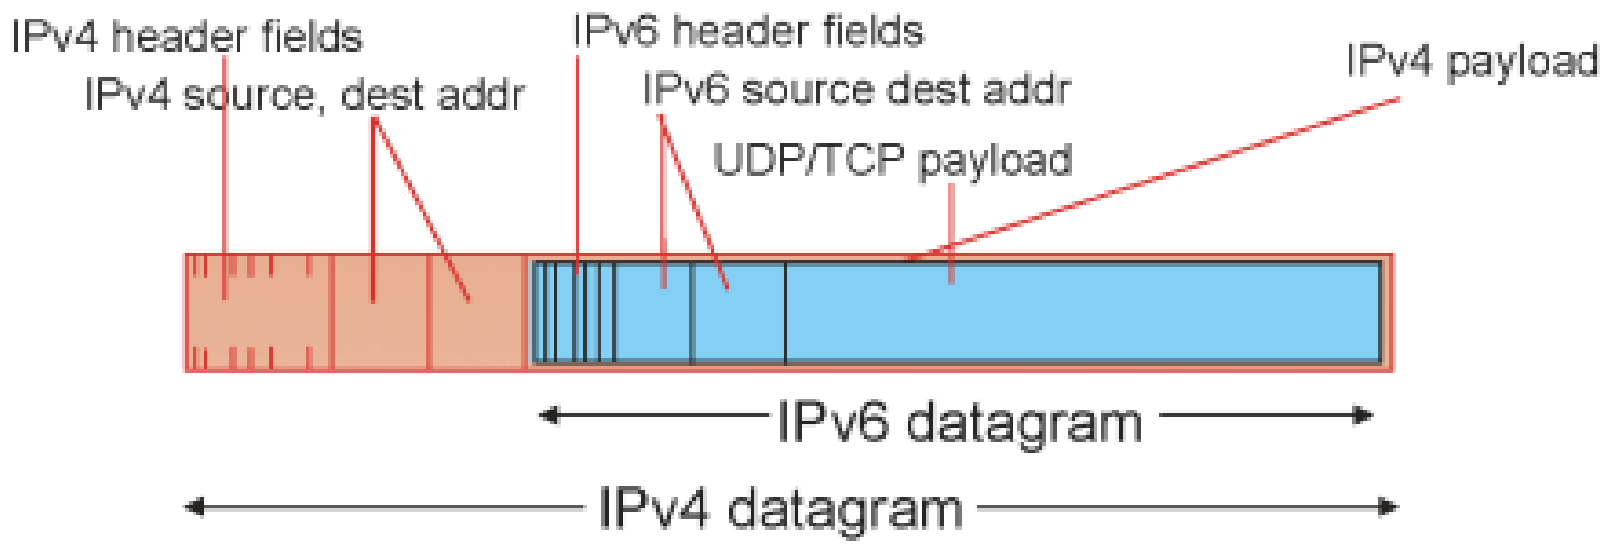

Network Layer 4-67

Tunneling

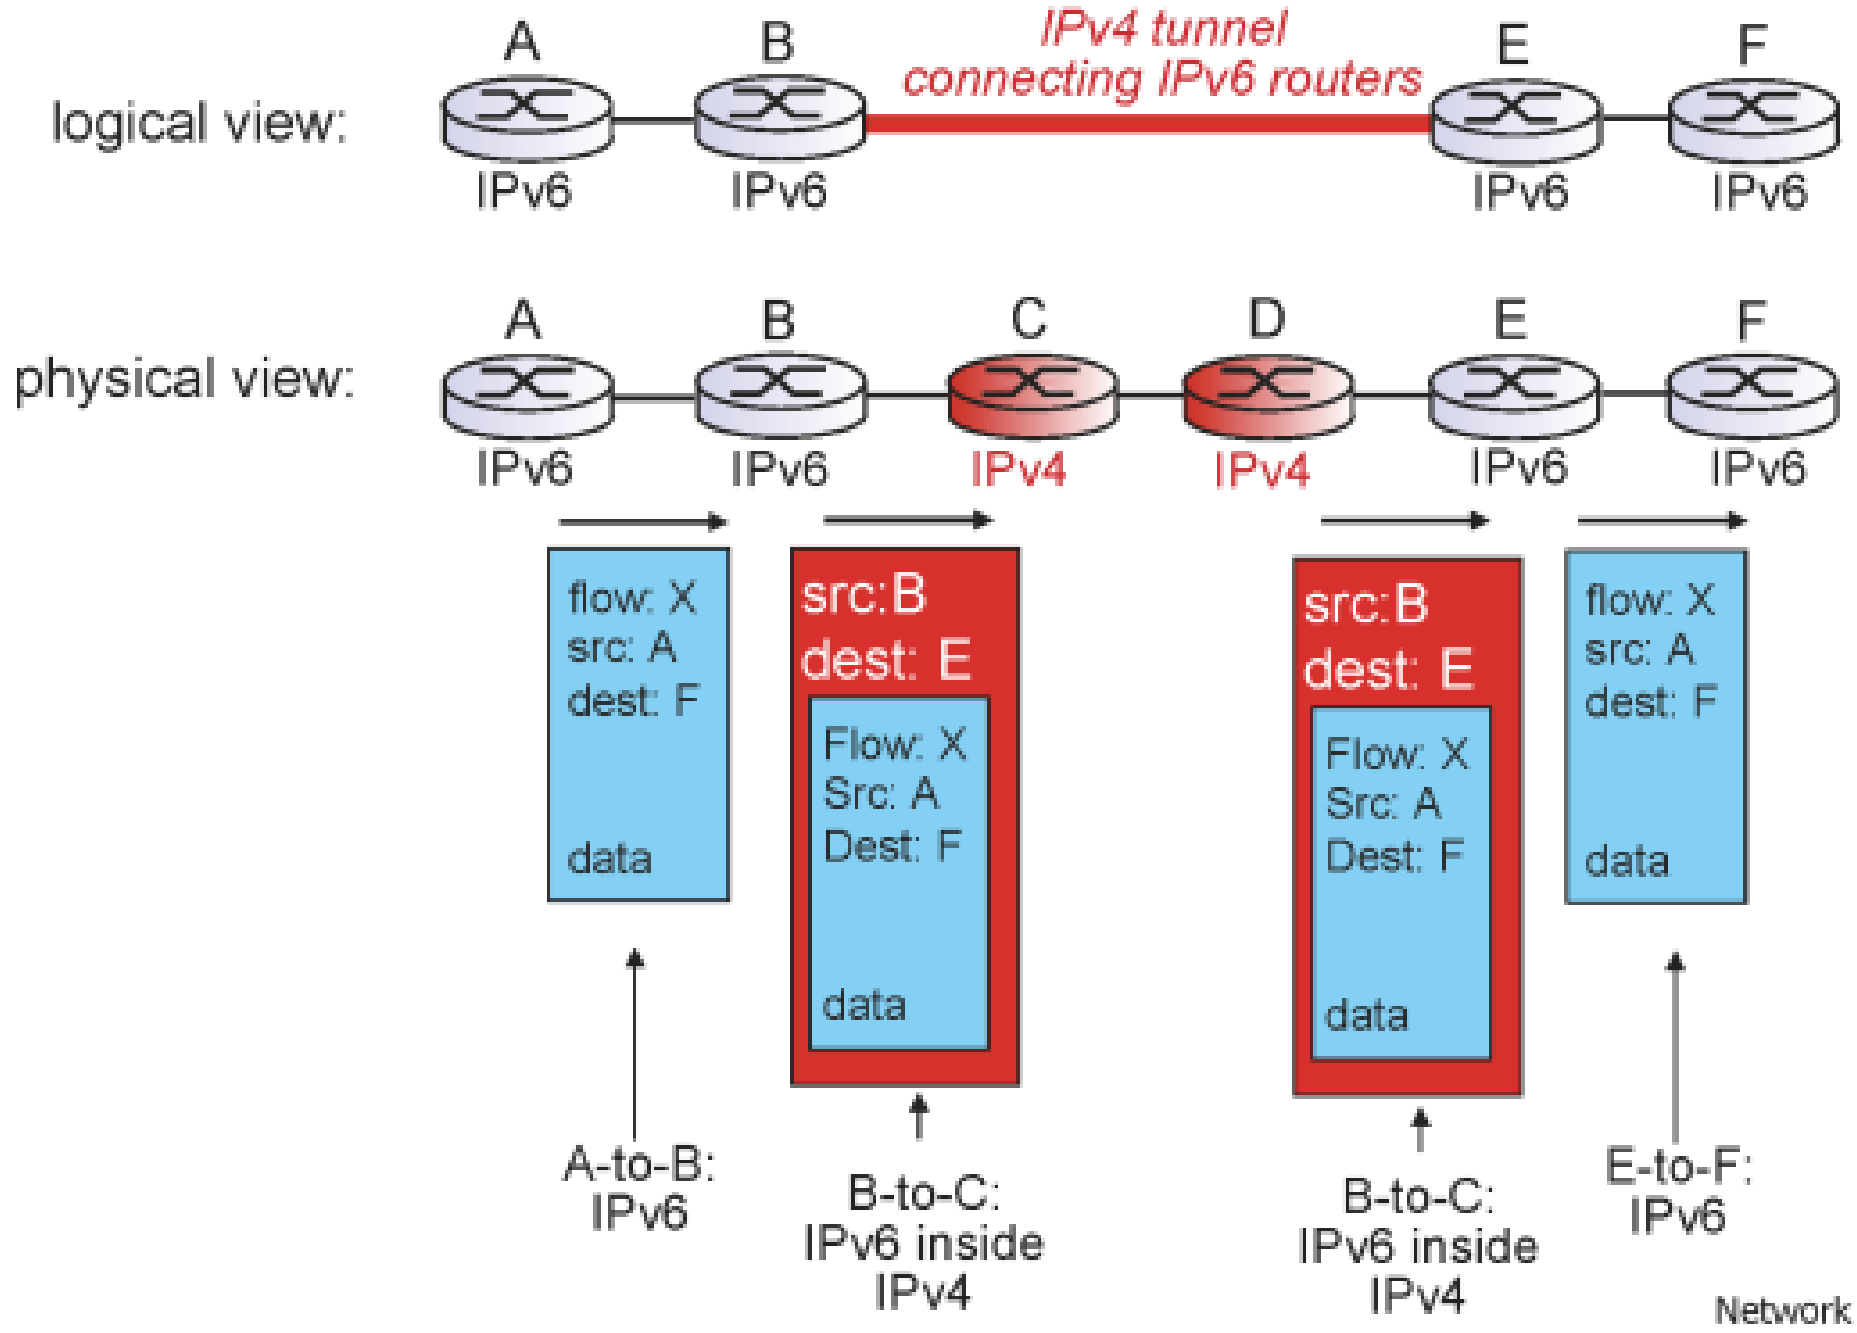

Network Layer 4-69

Chapter 4: outline

4.1 introduction
4.2 virtual circuit and datagram networks
4.3 what's inside a router
4.4 IP: Internet Protocol
- datagram format
- IPv4 addressing
- ICMP
- IPv6

4.5 routing algorithms
- link state
- distance vector
- hierarchical routing

4.6 routing in the Internet
- RIP
- OSPF
- BGP

4.7 broadcast and multicast routing

Network Layer 4-70

Interplay between routing, forwarding

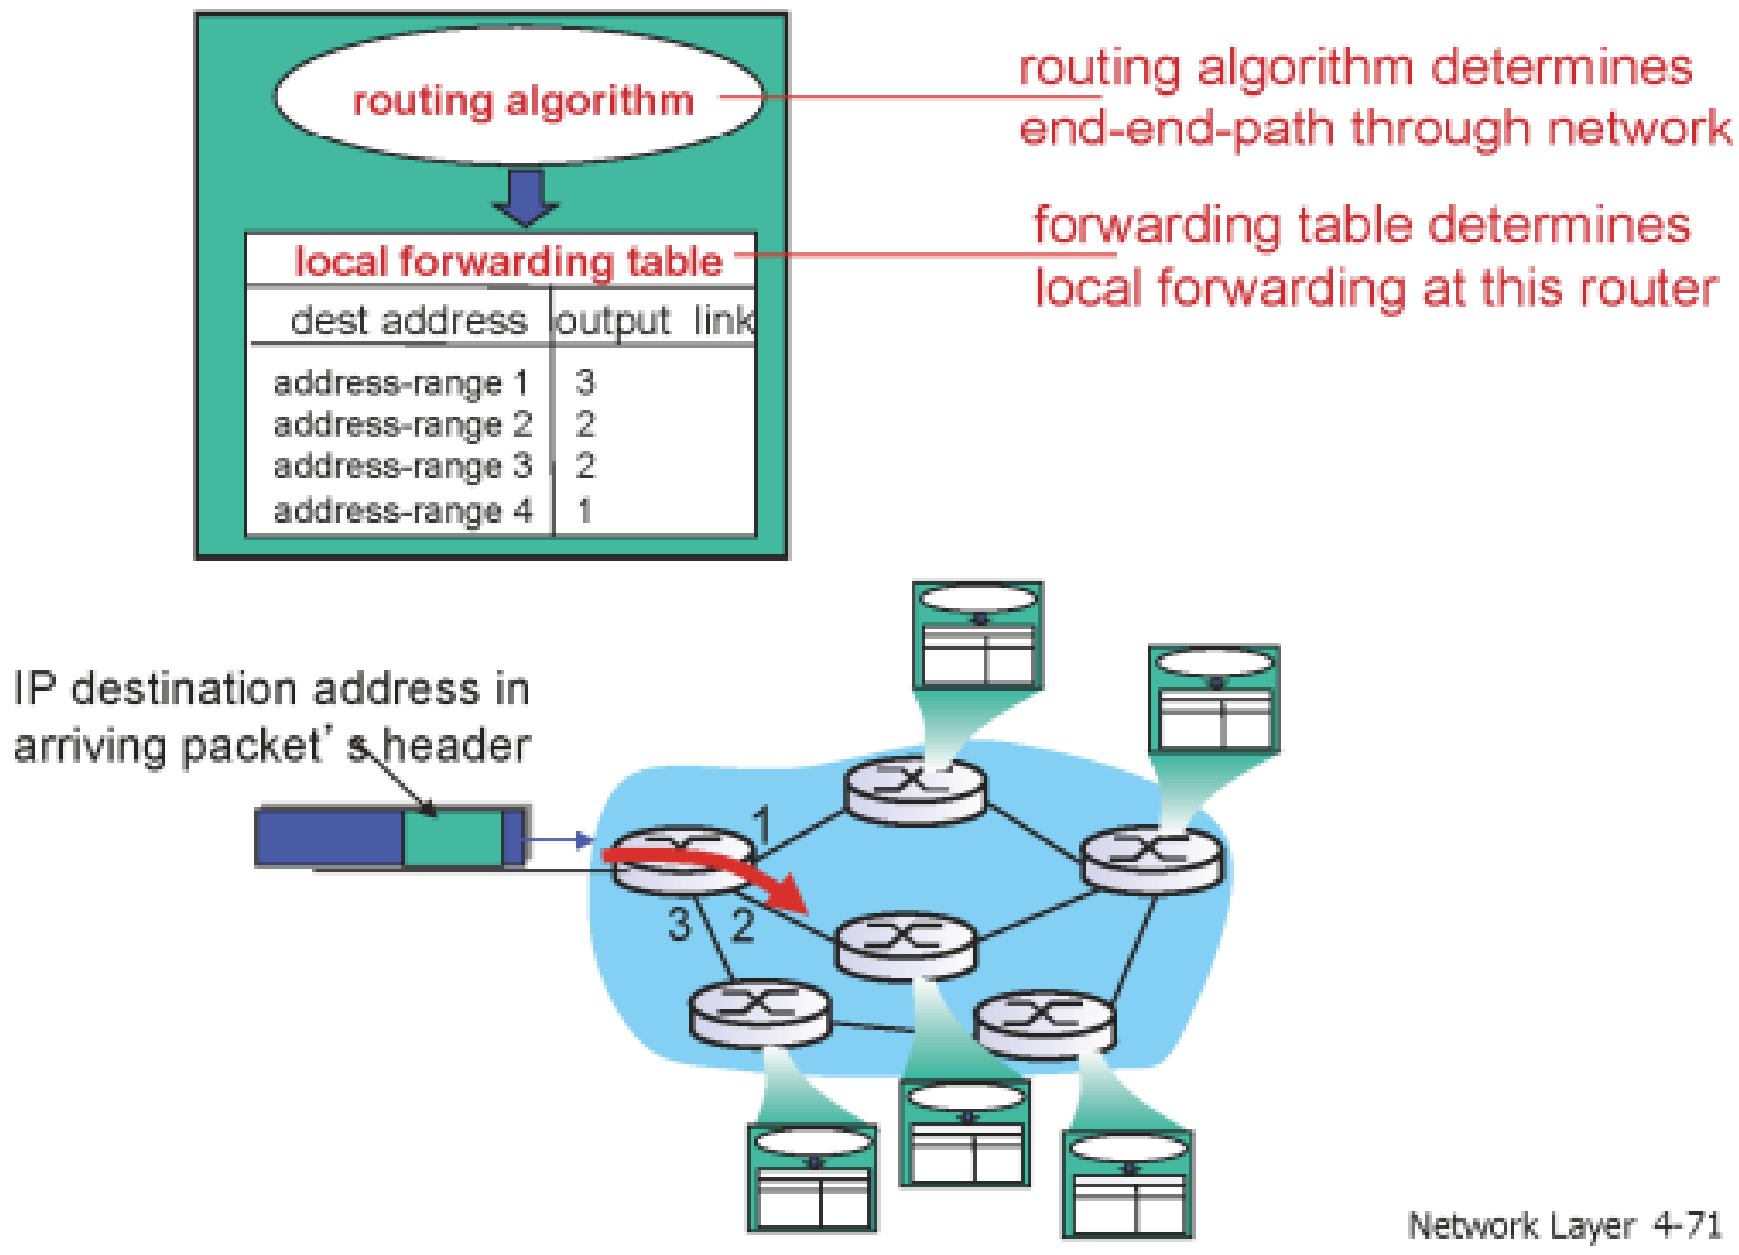

Graph abstraction

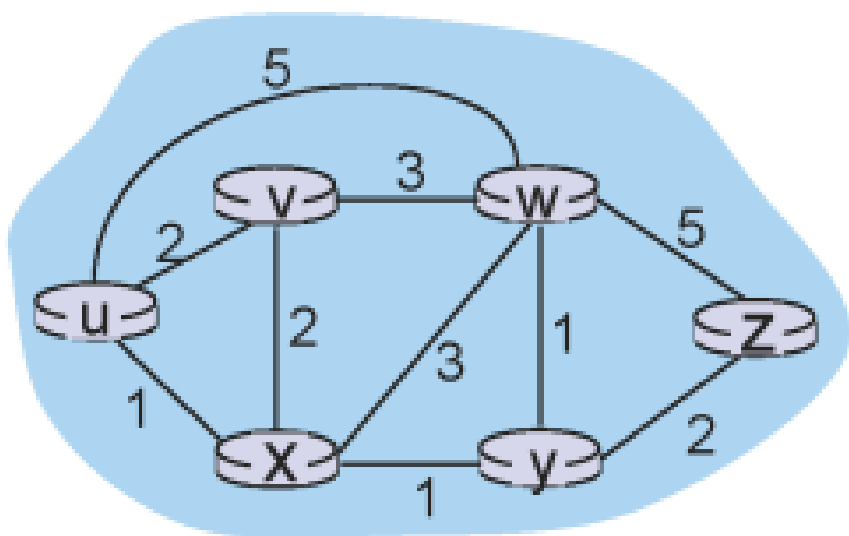

graph: G = (N,E)

N = set of routers = { u, v, w, x, y, z }

E = set of links ={ (u,v), (u,x), (v,x), (v,w), (x,w), (x,y), (w,y), (w,z), (y,z) }

aside: graph abstraction is useful in other network contexts, e.g., P2P, where *N* is set of peers and *E* is set of TCP connections

Graph abstraction: costs

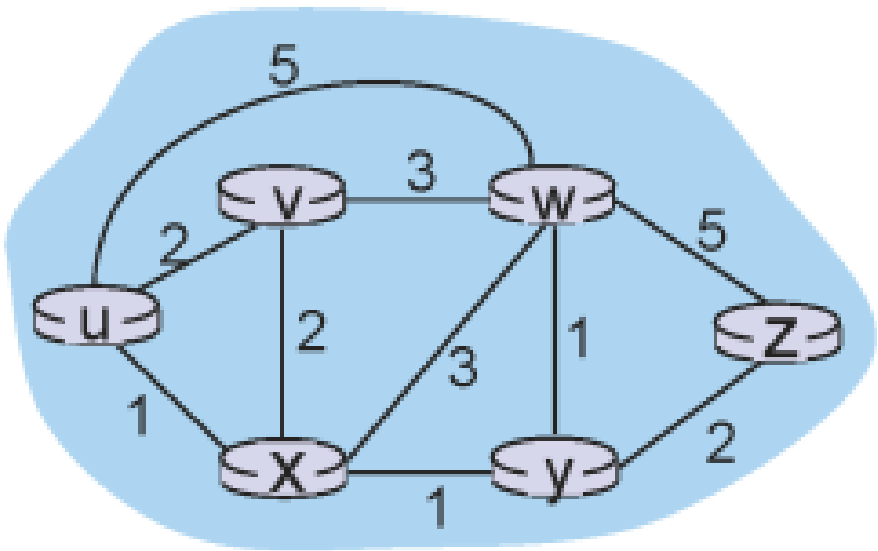

c(x,x') = cost of link (x,x')
e.g., c(w,z) = 5

cost could always be 1, or inversely related to bandwidth, or inversely related to congestion

cost of path $(x_1, x_2, x_3,\ldots, x_p) = c(x_1,x_2) + c(x_2,x_3) + \ldots + c(x_{p-1},x_p)$

key question: what is the least-cost path between u and z ?
routing algorithm: algorithm that finds that least cost path

Routing algorithm classification

Q: global or decentralized information?

global:

- all routers have complete topology, link cost info
- "link state" algorithms

decentralized:

- router knows physically-connected neighbors, link costs to neighbors
- iterative process of computation, exchange of info with neighbors
- "distance vector" algorithms

Q: static or dynamic?

static:

- routes change slowly over time

dynamic:

- routes change more quickly
  - periodic update
  - in response to link cost changes

Chapter 4: outline

4.1 introduction

4.2 virtual circuit and datagram networks

4.3 what's inside a router

4.4 IP: Internet Protocol
- datagram format
- IPv4 addressing
- ICMP
- IPv6

4.5 routing algorithms
- link state
- distance vector
- hierarchical routing

4.6 routing in the Internet
- RIP
- OSPF
- BGP

4.7 broadcast and multicast routing

A Link-State Routing Algorithm

Dijkstra's algorithm
- net topology, link costs known to all nodes
  - accomplished via "link state broadcast"
  - all nodes have same info
- computes least cost paths from one node ('source") to all other nodes
  - gives *forwarding table* for that node
- iterative: after k iterations, know least cost path to k dest.'s

notation:
- c(x,y): link cost from node x to y; = ∞ if not direct neighbors
- D(v): current value of cost of path from source to dest. v
- p(v): predecessor node along path from source to v
- N': set of nodes whose least cost path definitively known

Dijsktra’s Algorithm

```
Initialization:
  N' = {u}
  for all nodes v
    if v adjacent to u
        then D(v) = c(u,v)
    else D(v) = ∞

Loop
  find w not in N' such that D(w) is a minimum
  add w to N'
  update D(v) for all v adjacent to w and not in N' :
      D(v) = min( D(v), D(w) + c(w,v) )
  /* new cost to v is either old cost to v or known
   shortest path cost to w plus cost from w to v */
until all nodes in N'
```

Network Layer 4-77

Example

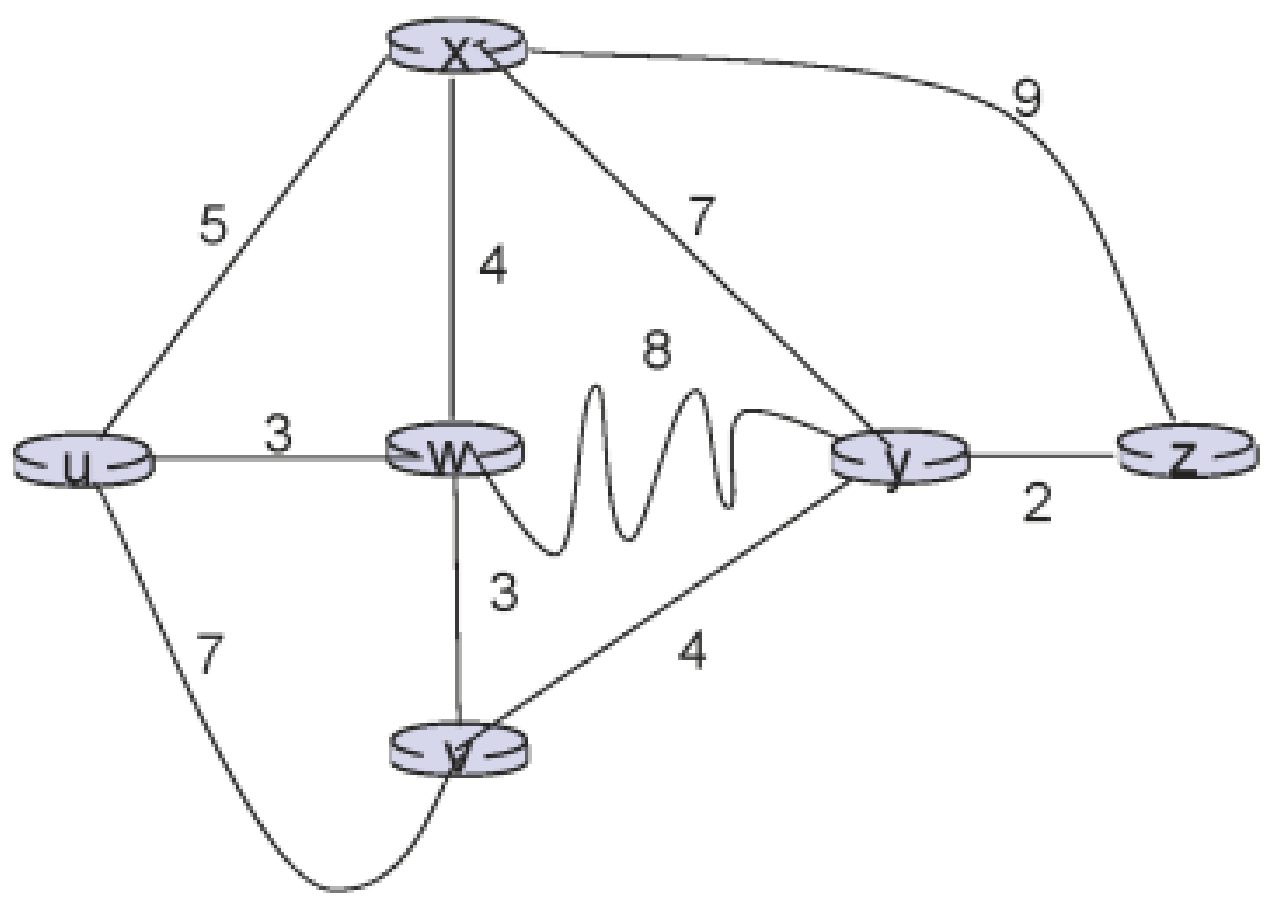


```
Initialization:
  N' = {u}
  for all nodes v
    if v adjacent to u
        then D(v) = c(u,v)
    else D(v) = ∞

Loop
  find w not in N' such that D(w) is a minimum
  add w to N'
  update D(v) for all v adjacent to w and not in N' :
      D(v) = min( D(v), D(w) + c(w,v) )
  /* new cost to v is either old cost to v or known
   shortest path cost to w plus cost from w to v */
until all nodes in N'
```

Network Layer 4-78

Dijkstra's algorithm: example

Step	N'	D(v) p(v)	D(w) p(w)	D(x) p(x)	D(y) p(y)	D(z) p(z)
0	u	7,u	3,u	5,u	∞	∞
1	uw	6,w		5,u	11,w	∞
2	uwx	6,w			11,w	14,x
3	uwxv				10,v	14,x
4	uwxvy					12,y
5	uwxvyz					

notes:

- construct shortest path tree by tracing predecessor nodes
- ties can exist (can be broken arbitrarily)

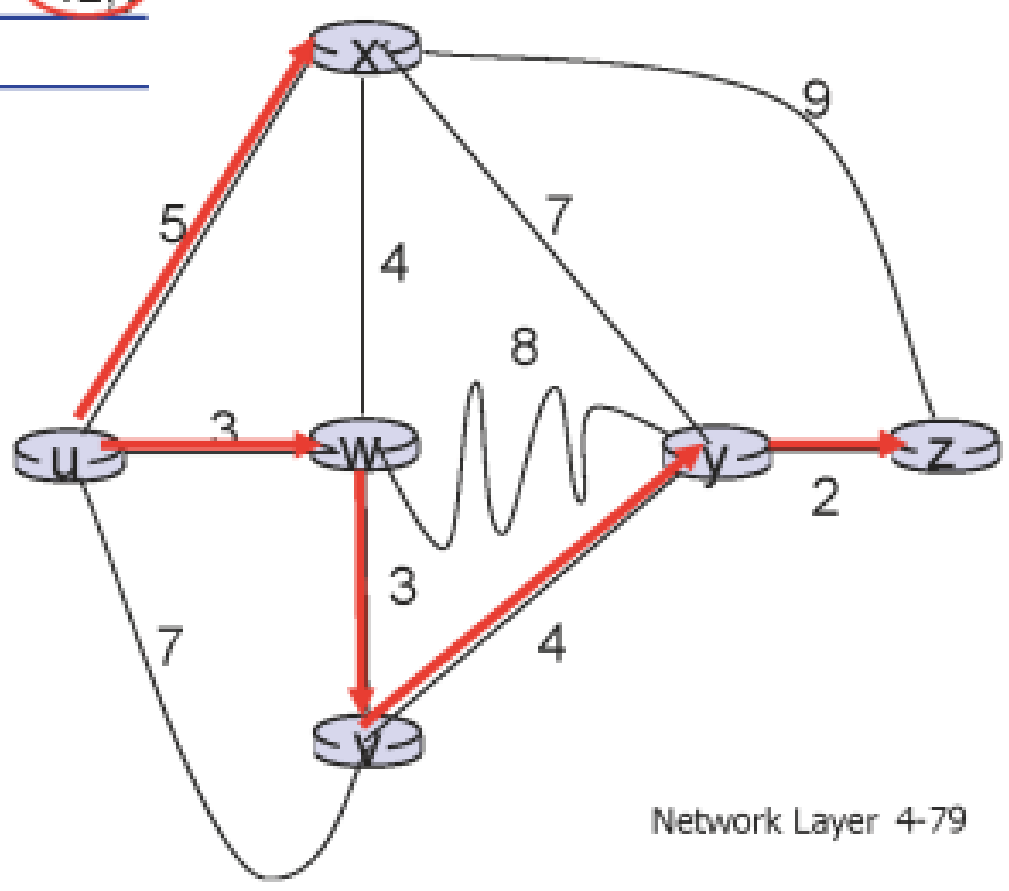

Dijkstra's algorithm, discussion

algorithm complexity: n nodes

- each iteration: need to check all nodes, w, not in N
- n(n+1)/2 comparisons: $O(n^2)$
- more efficient implementations possible: O(nlogn)

oscillations possible:

- e.g., support link cost equals amount of carried traffic:

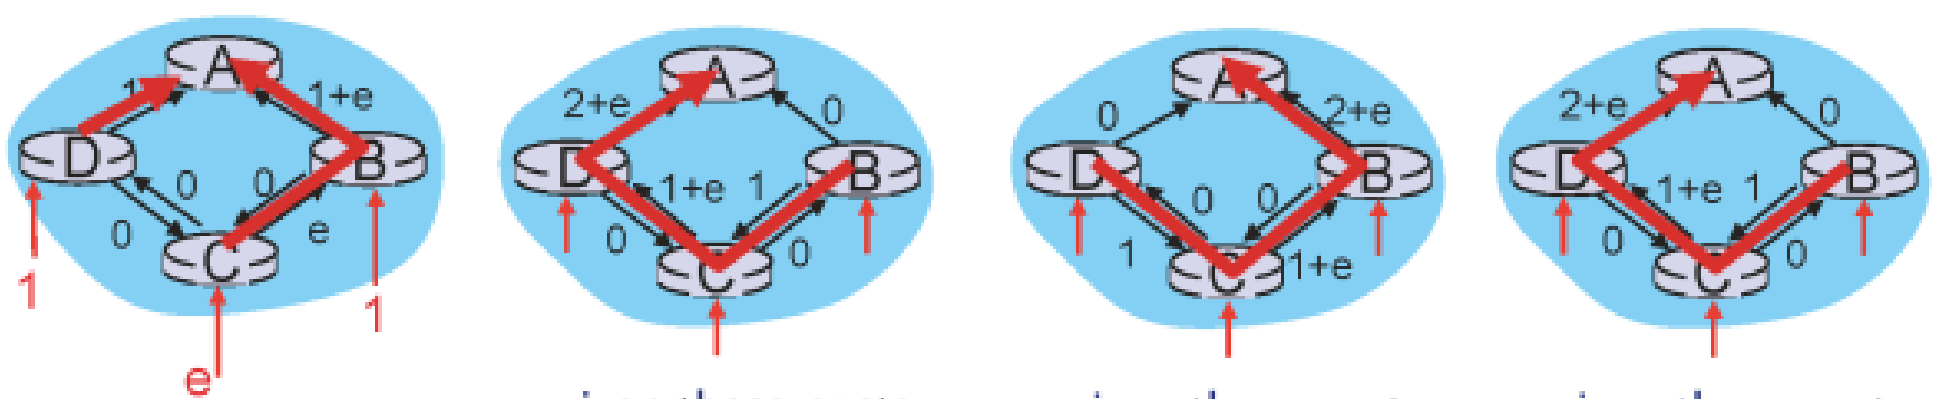

initially

given these costs, find new routing…. resulting in new costs

given these costs, find new routing…. resulting in new costs

given these costs, find new routing…. resulting in new costs

Chapter 4: outline

4.1 introduction
4.2 virtual circuit and datagram networks
4.3 what's inside a router
4.4 IP: Internet Protocol
- datagram format
- IPv4 addressing
- ICMP
- IPv6

4.5 routing algorithms
- link state
- distance vector
- hierarchical routing

4.6 routing in the Internet
- RIP
- OSPF
- BGP

4.7 broadcast and multicast routing

Distance vector algorithm

Bellman-Ford equation (dynamic programming)

let

$d_x(y)$:= cost of least-cost path from x to y

then

$$d_x(y) = \min_v \{c(x,v) + d_v(y)\}$$

cost from neighbor v to destination y

cost to neighbor v

min taken over all neighbors v of x